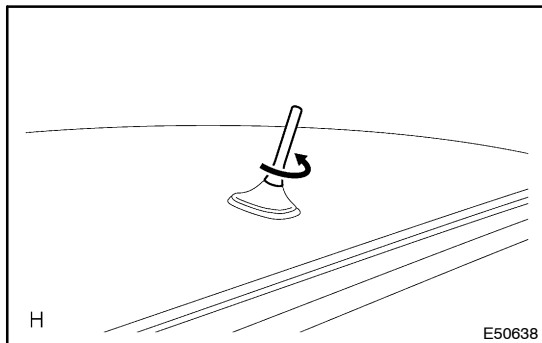


TELEPHONE ANTENNA BASE REPLACEMENT


6714K-01

HINT:

- LOCATION: [SEE PAGE 67-2](#).
- Installation is in the reverse order of removal.

**1. REMOVE TELEPHONE ANTENNA ROD**

- (a) Rotate the telephone antenna rod in the direction indicated by the arrow to remove it.

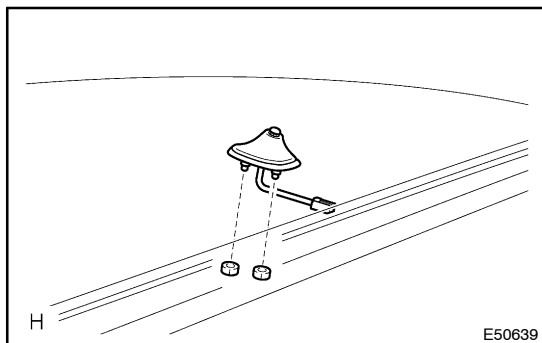2. REMOVE ROOF HEADLINING ASSY (SEE PAGE 76-52)**3. REMOVE TELEPHONE ANTENNA BASE**

- (a) Disconnect the connector.
- (b) Remove the 2 nuts and telephone antenna base.