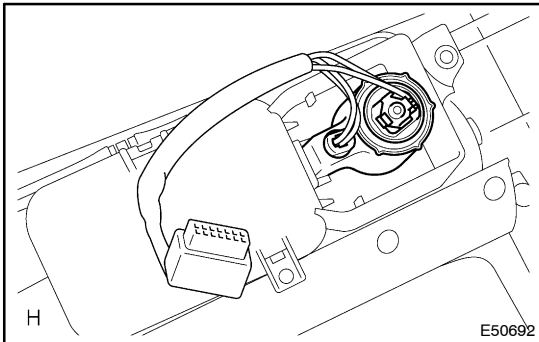


# CIGARETTE LIGHTER ASSY REPLACEMENT

6714N-01

**HINT:**

- COMPONENTS: [SEE PAGE 71-1](#).
  - Installation is in the reverse order of removal.
1. **REMOVE INSTRUMENT PANEL FINISH PANEL LOWER CENTER** ([SEE PAGE 71-6](#))
  2. **REMOVE CONSOLE PANEL SUB-ASSY UPPER** ([SEE PAGE 71-6](#))

**3. REMOVE CIGARETTE LIGHTER ASSY**

- (a) Rotate the socket cap counterclockwise to remove it.
- (b) Remove the cigarette lighter assy from the cigar-lighter hole bezel.

**4. INSTALL CIGARETTE LIGHTER ASSY**

- (a) Properly position the socket and ring at the cutout of the cigar-lighter hole bezel and insert them.
- (b) Rotate the socket cap clockwise from the backside.