


RADIO SWITCH AND VOLUME ASSY REPLACEMENT

67142-01


HINT:

Installation is in the reverse order of removal.

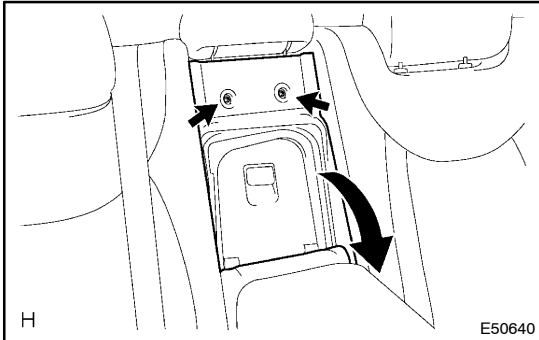


1. REMOVE RR SEAT CTR ARMREST PANEL

- (a) Remove the 2 rear seat back covers.
- (b) Remove the 2 screws and disconnect the rear seat armrest board.

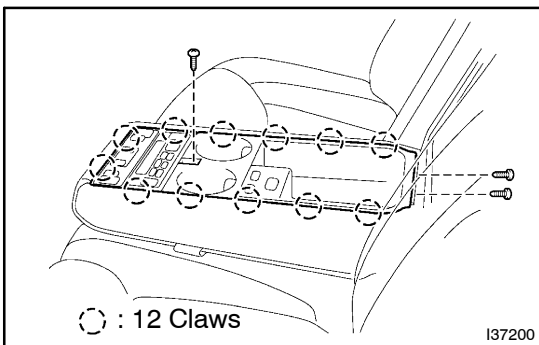

- (c) Remove the 3 screws.
- (d) Disengage the 12 claws and remove the rear seat center armrest panel.

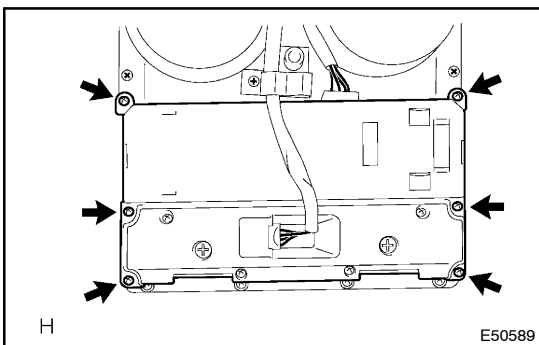

2. REMOVE RADIO SWITCH AND VOLUME ASSY

- (a) Disconnect the connector.
- (b) Remove the 6 screws and radio switch and volume assy.