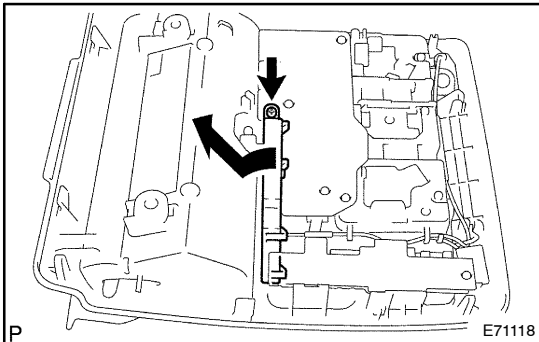


# MICROPHONE AMPLIFIER ASSY REPLACEMENT


6714D-01

**HINT:**

- □ COMPONENTS: [\[SEE PAGE 76-50\]](#).
  - □ LOCATION: [\[SEE PAGE 67-2\]](#).
  - Installation is in the reverse order of removal.
1. □ REMOVE MAP LAMP ASSY [\[SEE PAGE 76-52\]](#)
  2. □ REMOVE MICROPHONE ASSY [\[SEE PAGE 67-23\]](#)

**3. REMOVE MICROPHONE AMPLIFIER ASSY**

- (a) Remove the screw.
- (b) Disconnect the connector as shown in the illustration, and remove the microphone amplifier assy.

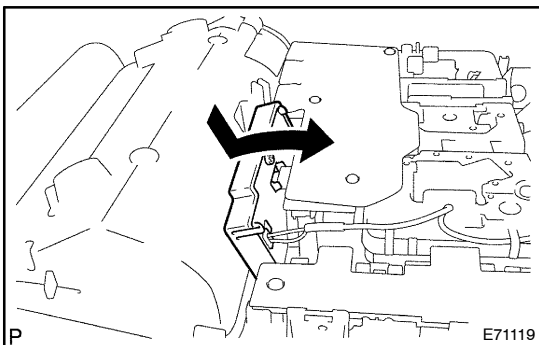**4. INSTALL MICROPHONE AMPLIFIER ASSY**

- (a) Connect the connector as shown in the illustration, and install the microphone amplifier assy.
- (b) Install the screw.