


REMOVAL

1. w/o Electronic modulated air suspension:
REMOVE FRONT SHOCK ABSORBER (See page SA-21)
2. w/ Electronic modulated air suspension:
REMOVE FRONT PNEUMATIC CYLINDER (See page SA-28)

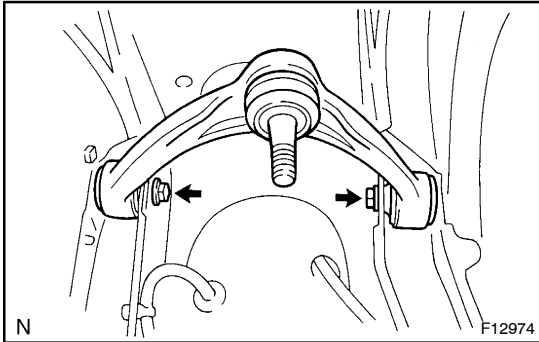

3. REMOVE UPPER SUSPENSION ARM

Remove the 2 bolts and the upper suspension arm.

Torque: 53 N·m (540 kgf·cm, 39 ft·lbf)