

REAR SUNSHADE REPLACEMENT

76154-01

HINT:


- The installation procedures are the removal procedures in reverse order. However, only installation procedures requiring additional information are included.
- A bolt without a torque specification is shown in the standard bolt chart (see page 03-2).

1. REMOVE PACKAGE TRAY TRIM PANEL ASSY (See page 76-52)

- Remove the rear door scuff plate LH and RH.
- Remove the rear door opening trim weatherstrip LH and RH.
- Remove the rear seat side cover LH and RH.
- Remove the roof side garnish inner LH and RH.
- Remove the rear speaker grille.
- Remove the package tray trim panel.

2. REMOVE PACKAGE TRAY TRIM PANEL ASSY NO. 2 (See page 76-52)

- Remove the center stop lamp.
- Remove the package tray trim panel No. 2.

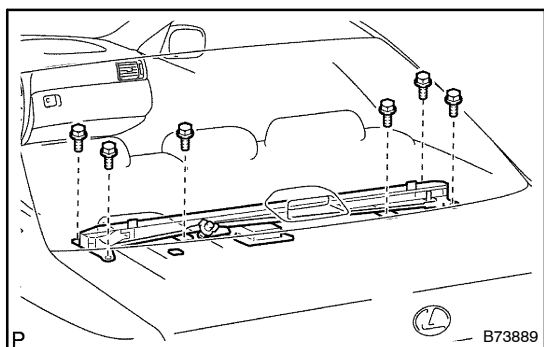

3. REMOVE REAR SUNSHADE

- Disconnect the connector.
- Remove the 6 bolts.
- Remove the rear sunshade.

NOTICE:

Be careful not to damage the vehicle body and glass.