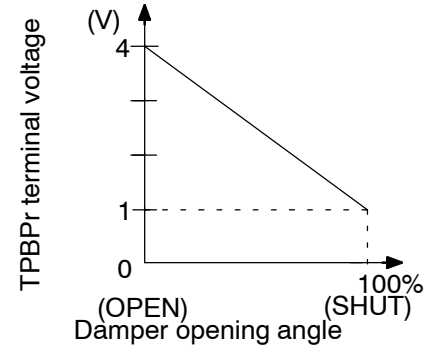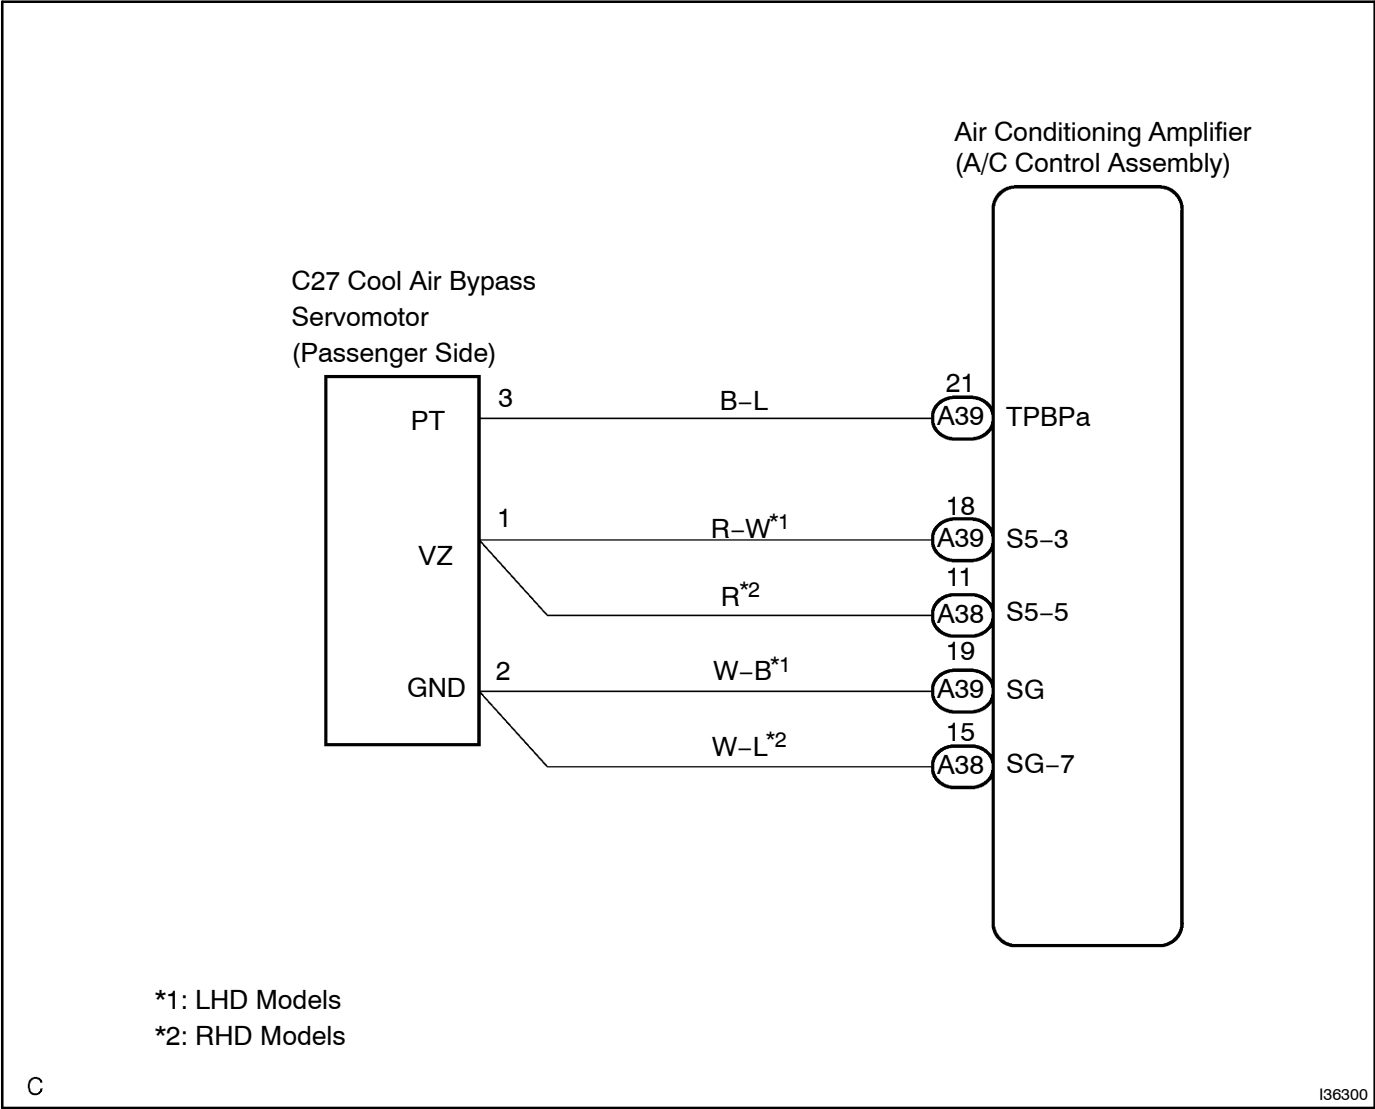| DTC	B1435	MAX COOL DAMPER POSITION SENSOR CIRCUIT (PASSENGER SIDE)

CIRCUIT DESCRIPTION

This sensor detects the position of the cool air bypass servomotor (Max cool damper servomotor) and sends the appropriate signals to the A/C amplifier. The position sensor is built in the cool air bypass servomotor.

DTC No.	Detection Item	Trouble Area
B1435	Max cool bypass damper position sensor circuit (Passenger side) (Open or short)	• Cool air bypass servomotor (Max cool damper servomotor) • Harness or connector between cool air bypass servomotor (Max cool damper servomotor) and A/C amplifier • A/C amplifier

WIRING DIAGRAM

*1: LHD Models
*2: RHD Models

C

I36300

INSPECTION PROCEDURE

1	READ VALUE ON INTELLIGENT TESTER II

(a) Connect the intelligent tester II to the DLC3.
(b) Turn the ignition switch to the ON position and push the intelligent tester II main switch on.
(c) Select the item below in the DATA LIST, and read the display on the intelligent tester II.

DATA LIST / AIR CONDITIONER:

Item	Measure Item/Display (Range)	Normal Condition	Diagnostic Note
Cool air bypass damper position (P side) (A/B Damp Pos–P)	Cool air bypass damper position (Passenger side) / min.: −14% max.: 113.5%	Open: Approx. 0% SHUT: APPROX. 100%	–

OK:
The display is as specified in the normal condition.

Result:

NG	A
OK (Checking from the PROBLEM SYMPTOM TABLE)	B
OK (Checking from the DTC)	C

B	PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN PROBLEM SYMPTOMS TABLE (**SEE PAGE 05–778**)

C	REPLACE AIR CONDITIONING AMPLIFIER (**SEE PAGE 55–16**)

A

2 INSPECT AIR CONDITIONING AMPLIFIER(TPBPa – SG (SG–7))

Air Conditioning Amplifier Connector Wire Harness View:

A38 A39

SG–7 *2   SG *1
TPBPa

*1: LHD
*2: RHD

I36362

(a) Remove the A/C amplifier with connectors still connected.
(b) Turn the ignition switch to the ON position.
(c) Change the set temperature to activate the cool air by-pass servomotor.
(d) Measure the voltage according to the value(s) in the table below.

Standard:

Tester connection	Condition	Specified condition
A39–21 (TPBPa) – A38–19 (SG) *1	MAX. Hot	0.5 to 1.8 V
A39–21 (TPBPa) – A38–19 (SG) *1	MAX. Cool	3.5 to 4.5 V
A39–21 (TPBPa) – A38–15 (SG–7) *2	MAX. Hot	0.5 to 1.8 V
A39–21 (TPBPa) – A38–15 (SG–7) *2	MAX. Cool	3.5 to 4.5 V

HINT:
- *1: LHD
- *2: RHD
- As the set temperature increases, the voltage decreases gradually without interruption.

Result:

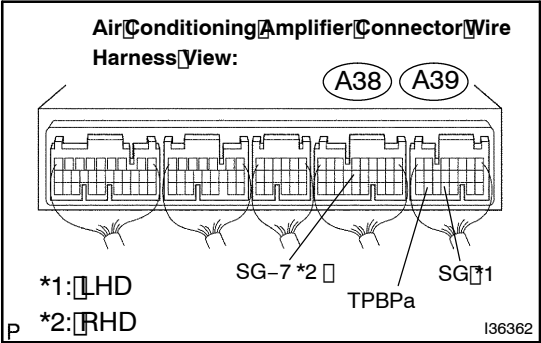|	
NG	A
OK (Checking from the PROBLEM SYMPTOMS TABLE)	B
OK (Checking from the DTC)	C

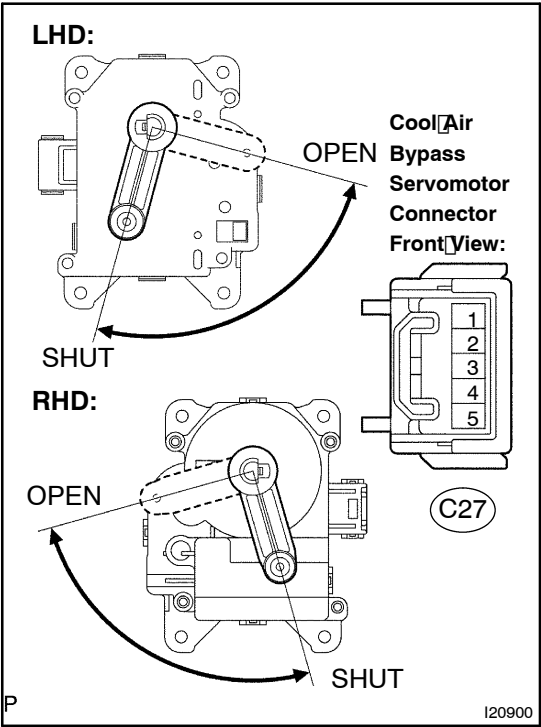**B** ⟩ **PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN PROBLEM SYMPTOMS TABLE (SEE PAGE 05–778)**

C ⟩ **REPLACE AIR CONDITIONING AMPLIFIER (SEE PAGE 55–16)**

A

| 3 | INSPECT COOL AIR BYPASS SERVOMOTOR |

LHD:

OPEN

Cool Air Bypass Servomotor Connector Front View:

SHUT

RHD:

OPEN

1
2
3
4
5

C27

SHUT

P
I20900

(a) Remove the cool air bypass servomotor.

(b) Measure the resistance according to the value(s) in the table below.

Standard:

Tester connection	Condition	Specified condition
C27–1 (VZ) – C27–2 (GND)	Always	4.2 to 7.2 kΩ

(c) Measure the resistance according to the value(s) in the table below.

HINT:

See page 05–878 for operation procedure for cool air bypass servomotor.

Standard:

Tester connection	Condition	Specified condition
C27–3 (PT) – C27–2 (GND)	Max. Cool	3.33 to 4.03 kΩ
C27–3 (PT) – C27–2 (GND)	Max. Hot	0.80 to 1.60 kΩ

HINT:

• As the cool air bypass servomotor moves from the cool side to the hot side, the resistance decreases gradually without interruption.
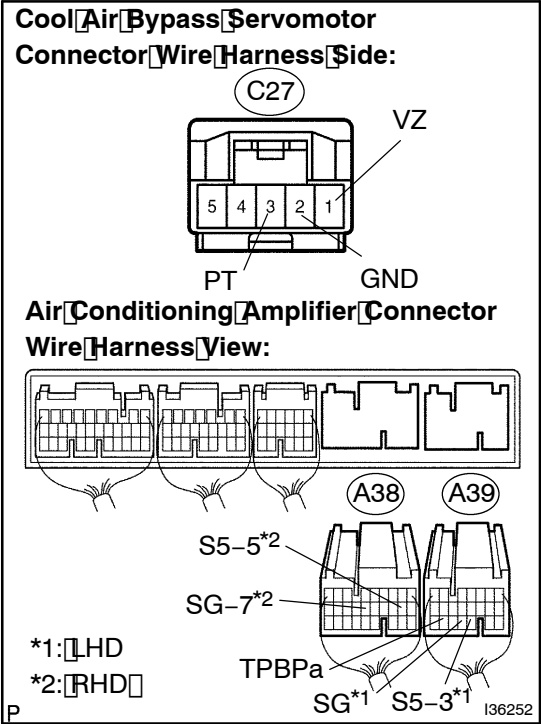
| NG > | REPLACE COOL AIR BYPASS SERVOMOTOR |

| OK |

4	CHECK HARNESS AND CONNECTOR(COOL AIR BYPASS SERVOMOTOR – AIR CONDITIONING AMPLIFIER) (SEE PAGE 01–44)

Cool Air Bypass Servomotor Connector Wire Harness Side:

C27

VZ

5 4 3 2 1

PT   GND

Air Conditioning Amplifier Connector Wire Harness View:

A38   A39

S5–5*2

SG–7*2

*1: LHD
*2: RHD

TPBPa

SG*1   S5–3*1   I36252

P

(a) Measure the resistance according to the value(s) in the table below.

Standard:

Tester connection	Condition	Specified condition
A39–21 (TPBPa) – C27–3 (PT)	Always	Below 1 Ω
A39–18 (S5–3) – C27–1 (VZ) *1	Always	Below 1 Ω
A38–11 (S5–5) – C27–1 (VZ) *2	Always	Below 1 Ω
A39–19 (SG) – C27–2 (GND) *1	Always	Below 1 Ω
A38–15 (SG–7) – C27–2 (GND) *2	Always	Below 1 Ω
C27–3 (PT) – Body ground	Always	10 kΩ or higher
C27–1 (VZ) – Body ground	Always	10 kΩ or higher
C27–2 (GND) – Body ground	Always	10 kΩ or higher

HINT:

*1: LHD
*2: RHD

NG >	REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

REPLACE AIR CONDITIONING AMPLIFIER (SEE PAGE 55–16)