


REAR SPEAKER ASSY

REPLACEMENT

67148-01

HINT:

- COMPONENTS: [SEE PAGE 75-28.](#)
 - LOCATION: [SEE PAGE 67-2.](#)
 - Installation is in the reverse order of removal.
 - The procedure for the left side is the same as that for the right side. The procedure for right side is shown below.
1. **REMOVE SIDE TRIM BOARD COVER FRONT RH** ([SEE PAGE 75-32](#))
 2. **REMOVE SIDE REAR CURTAIN ASSY RH (W/ REAR CURTAIN SUB-ASSY)** ([SEE PAGE 75-32](#))
 3. **REMOVE POWER WINDOW REGULATOR SWITCH ASSY REAR** ([SEE PAGE 75-32](#))
 4. **REMOVE REAR DOOR INSIDE HANDLE BEZEL RH** ([SEE PAGE 75-32](#))
 5. **REMOVE REAR DOOR TRIM BOARD SUB-ASSY RH** ([SEE PAGE 75-32](#))

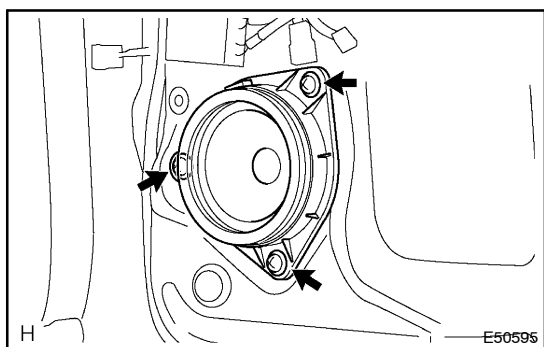

6. REMOVE REAR SPEAKER ASSY

- (a) Disconnect the connector.
- (b) Remove the 3 screws and rear speaker assy.