


REPLACEMENT


HINT:

- The installation procedures are the removal procedures in reverse order.
- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

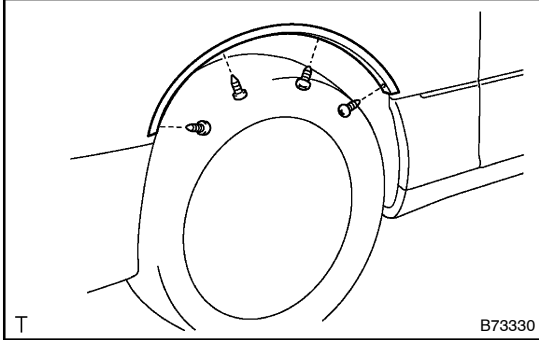

1. REMOVE FRONT FENDER WHEEL OPENING MOULDING LH

- (a) Remove the 4 screws and moulding.

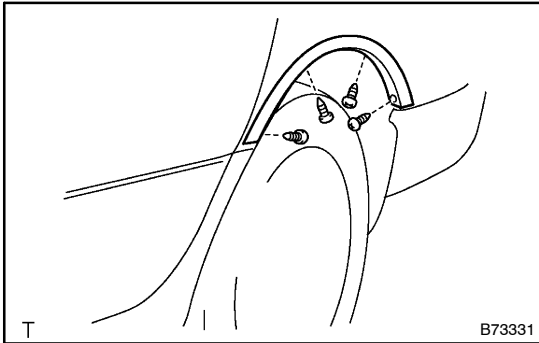

2. REMOVE QUARTER PANEL WHEEL OPENING MOULDING LH

- (a) Remove the 4 screws and moulding.