
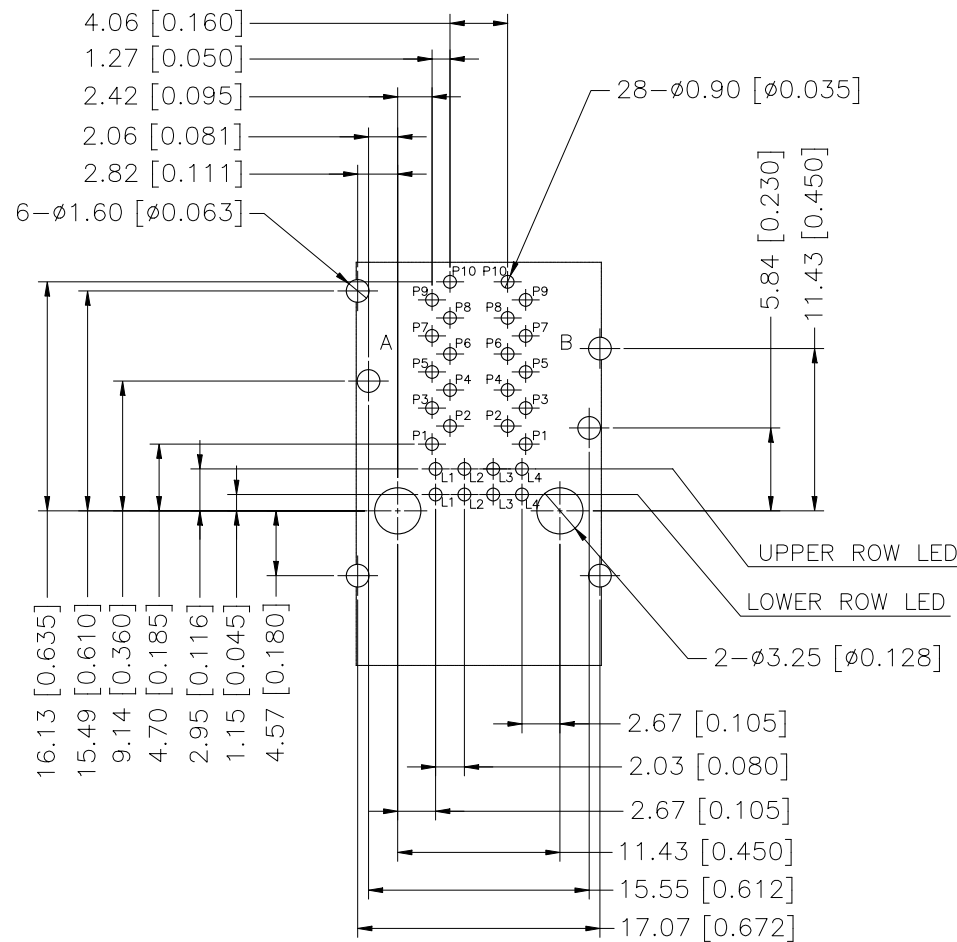
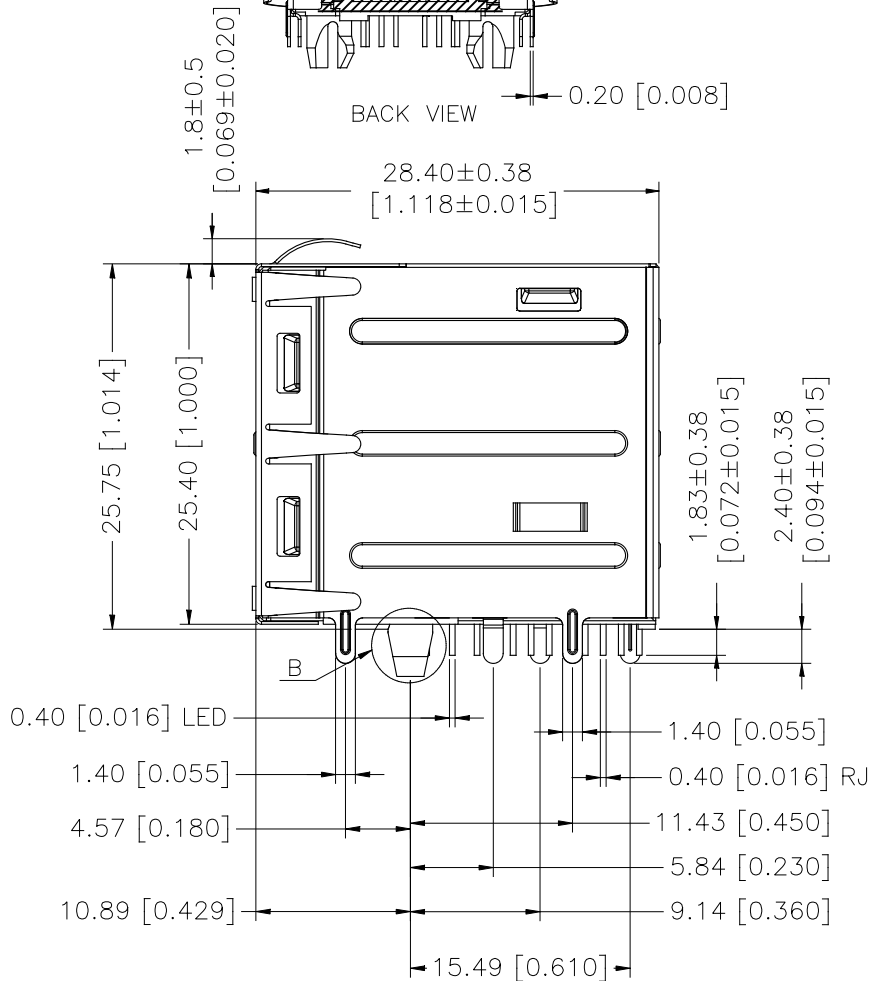
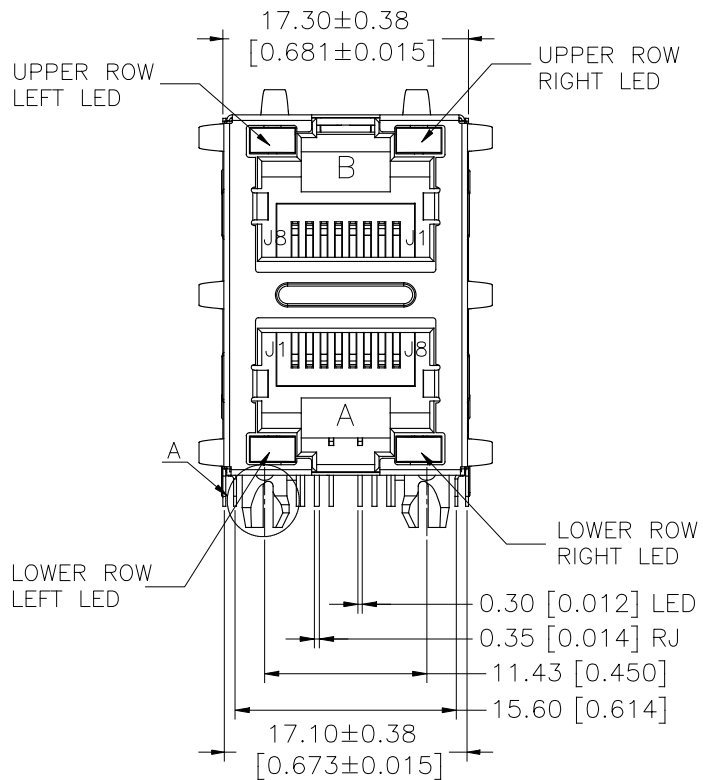
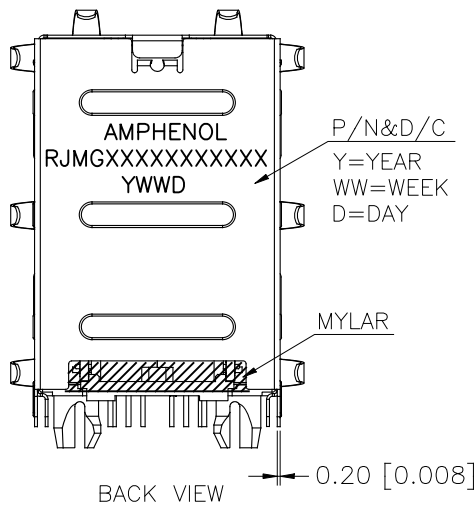



This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU & 2015/863/EU for RoHS compliant .


REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
AX3	-	UPDATE DRAWING	2021.09.06	Benly Han

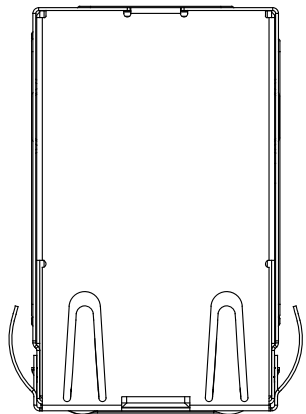

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE VIEW)

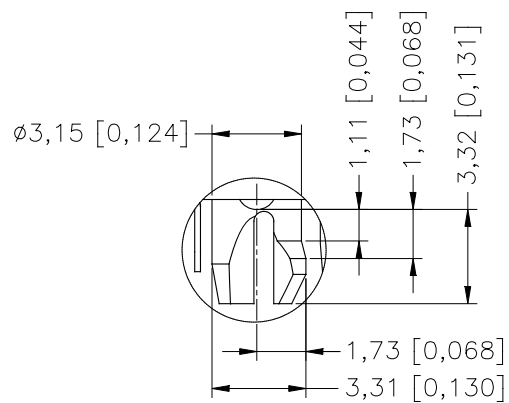

Detail A



Detail B


TOLERANCE	DRAWN	APPROVALS	DATE	TITLE		Amphenol®		
X. X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 ANGULAR ±2° UNLESS OTHERWISE SPECIFIED	DESIGNED	Benly Han	09/06/2021	RJMG221X SERIES 1000 BASE-T WITH LED OPTION		Amphenol Corporation Amphenol Taiwan Corporation		
	CHECKED	Vivian Wen	09/06/2021			PART No.	RJMG221KVXXW0XR	
	APPROVED	Roger Tsai	09/06/2021			DWG No.	RJMG221KVXXW0XR	REV. AX3
	DWG TYPE	CUST DWG	PROJECT CODE RJMG			UNIT mm	SIZE A3	
				SCALE NA	SHEET 1 OF 3			

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU & 2015/863/EU for RoHS compliant.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
AX3	-	UPDATE DRAWING	2021.09.06	Benly Han

SCHEMATIC FOR RJ45:

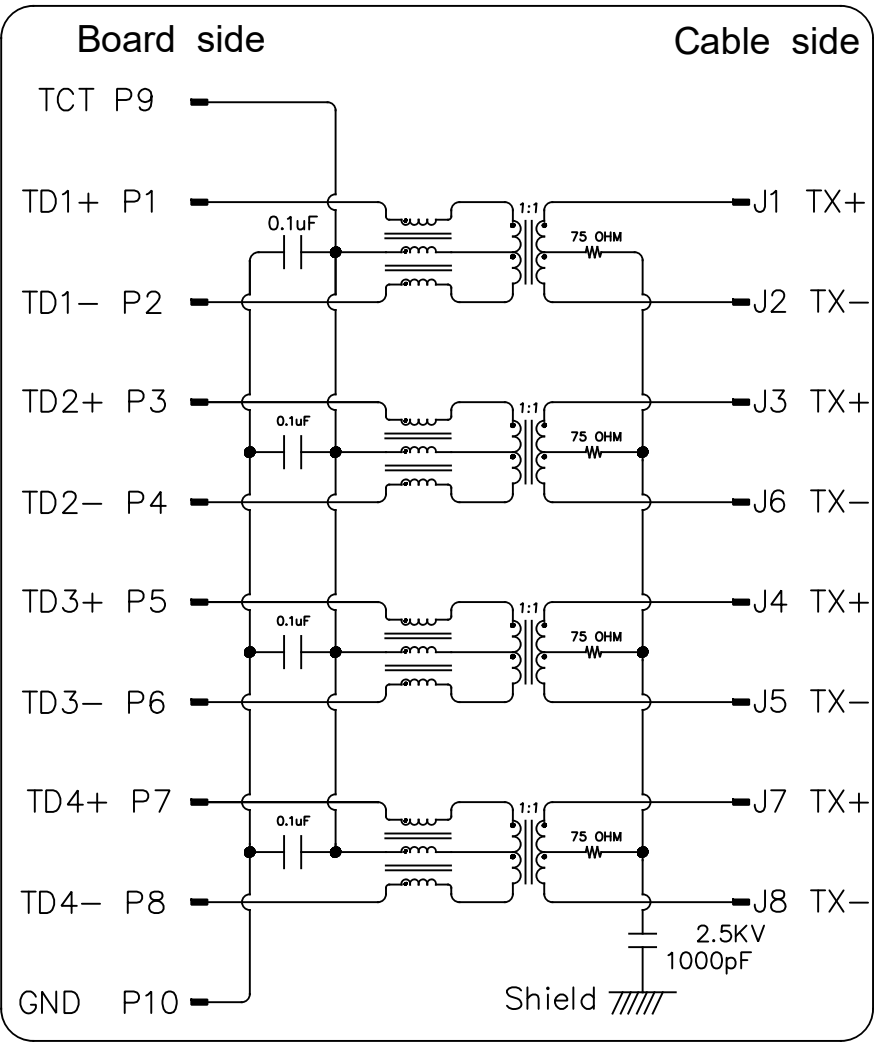

ELECTRICAL CHARACTERISTICS :

1. INSERTION LOSS :
 - 1~100 MHz -1.0dB MAX.
2. RETURN LOSS(LOAD 100Ω) :
 - 1~30 MHz -18dB MIN
 - 30~60 MHz -16dB MIN
 - 60~80 MHz -12dB MIN
 - 80~100 MHz -10dB MIN
3. COMMON MODE REJECTION
 - 1~100 MHz -30dB MIN
4. CROSS TALK
 - 1~100 MHz -30dB MIN
5. OCL @ 100KHz, 0.1V, 8mA DC BIAS
 - (P1-P2),(P3-P4),(P5-P6),(P7-P8) : 350 uH MIN
6. DCR
 - (J1-J2),(J3-J6),(J4-J5),(J7-J8) : 1.2Ω MAX
7. HI-POT TEST
 - BOARD SIDE TO CABLE SIDE : 2250VDC 60S
8. TURNS RATION 100KHz
 - (P1-P2) : (J1-J2) = 1:1 ±%5
 - (P3-P4) : (J3-J6) = 1:1 ±%5
 - (P5-P6) : (J4-J5) = 1:1 ±%5
 - (P7-P8) : (J7-J8) = 1:1 ±%5

1. MATERIAL
 - HOUSING&INSERT : PA10T, UL 94V-0,BLACK
 - SPACER : LCP, UL 94V-0,BLACK
 - RJ CONTACTS : PHOSPHOR BRONZE,T=0.3MM
 - PLATING : SELECT GOLD ON CONTACT AREA, 50U''MIN NICKEL OVERALL
 - SOLDER TAIL TERMINAL : COPPER ALLOY, T=0.35MM
 - PLATING : 100U''MIN TIN , 50U''MIN NICKEL OVERALL
 - SHIELD : STAINLESS, THICKNESS=0.2MM, PRE-SOLDERING.

2. RJ45 SPECIFICATIONS
 - INSULATION RESISTANCE : 500 MOHMS MIN
 - INSERTION FORCE WITH THE LATCH DEPRESSED :22N MAX
 - REMOVAL FORCE WITH THE LATCH DEPRESSED :44N MAX
 - DURABILITY :750 CYCLES


3. OPERATING AND STORAGE TEMPERATURE
 - OPERATING TEMPERATURE : -40°C TO +85°C
 - STORAGE TEMPERATURE : -40°C TO +85°C

4. ESD PACKAGING.


5. TEMPERATURE CONDITION OF WAVE SOLDERING:265°C 10sMAX.



Note:
The measuring point for the specified temperature shall be on the soldered part of the lead.

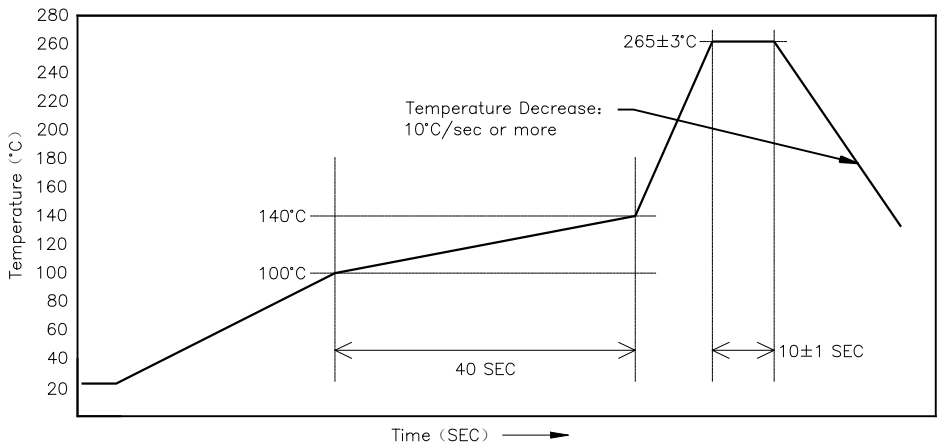

LED OPTIONS:

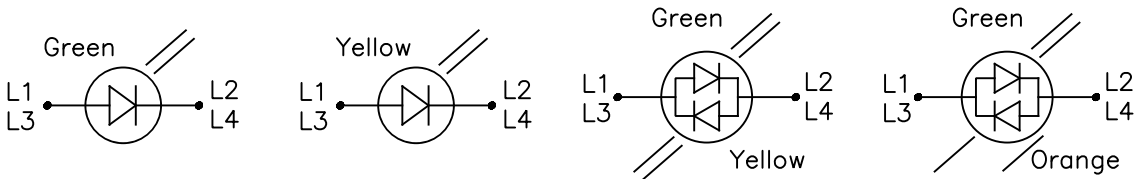

PART NO. RJMG221KV X X W0 X R

LED1(RIGHT SIDE) OPTIONS

LED2(LEFT SIDE) OPTIONS

- 0- No LED (Blocked Hole)
- 1- Green
- 2- Yellow
- 4- Bi-color Green/Yellow
- 6- Bi-color Green/Orange

Plating and Packaging Option:
B: gold 6u'',Tray
C: gold flash,Tray
D: gold 15u'', Tray
E: gold 30u'', Tray
F: gold 50u'', Tray

Emitting Color	λp (nm)	Vf @If=20mA	Ir @Vr=5V
Green	565	1.7V~2.6V	10μA max.
Yellow	585	1.7V~2.6V	10μA max.
Orange	605	1.7V~2.6V	10μA max.

TOLERANCE	DRAWN	APPROVALS	DATE	TITLE		UNIT	SIZE	PART No.	
X. X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 ANGULAR ±2° UNLESS OTHERWISE SPECIFIED	DESIGNED	Benly Han	09/06/2021	RJMG221X SERIES 1000 BASE-T WITH LED OPTION		mm	A3	RJMG221KVXXW0XR	
	CHECKED	Vivian Wen	09/06/2021					RJMG221KVXXW0XR	
	APPROVED	Roger Tsai	09/06/2021					RJMG221KVXXW0XR	
	DWG TYPE	CUST DWG	PROJECT CODE RJMG			SCALE NA	SHEET 2 OF 3	DWG No.	REV. AX3


Amphenol®

Amphenol Corporation
Amphenol Taiwan Corporation


This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU & 2015/863/EU for RoHS compliant.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
AX3	-	UPDATE DRAWING	2021.09.06	Benly Han

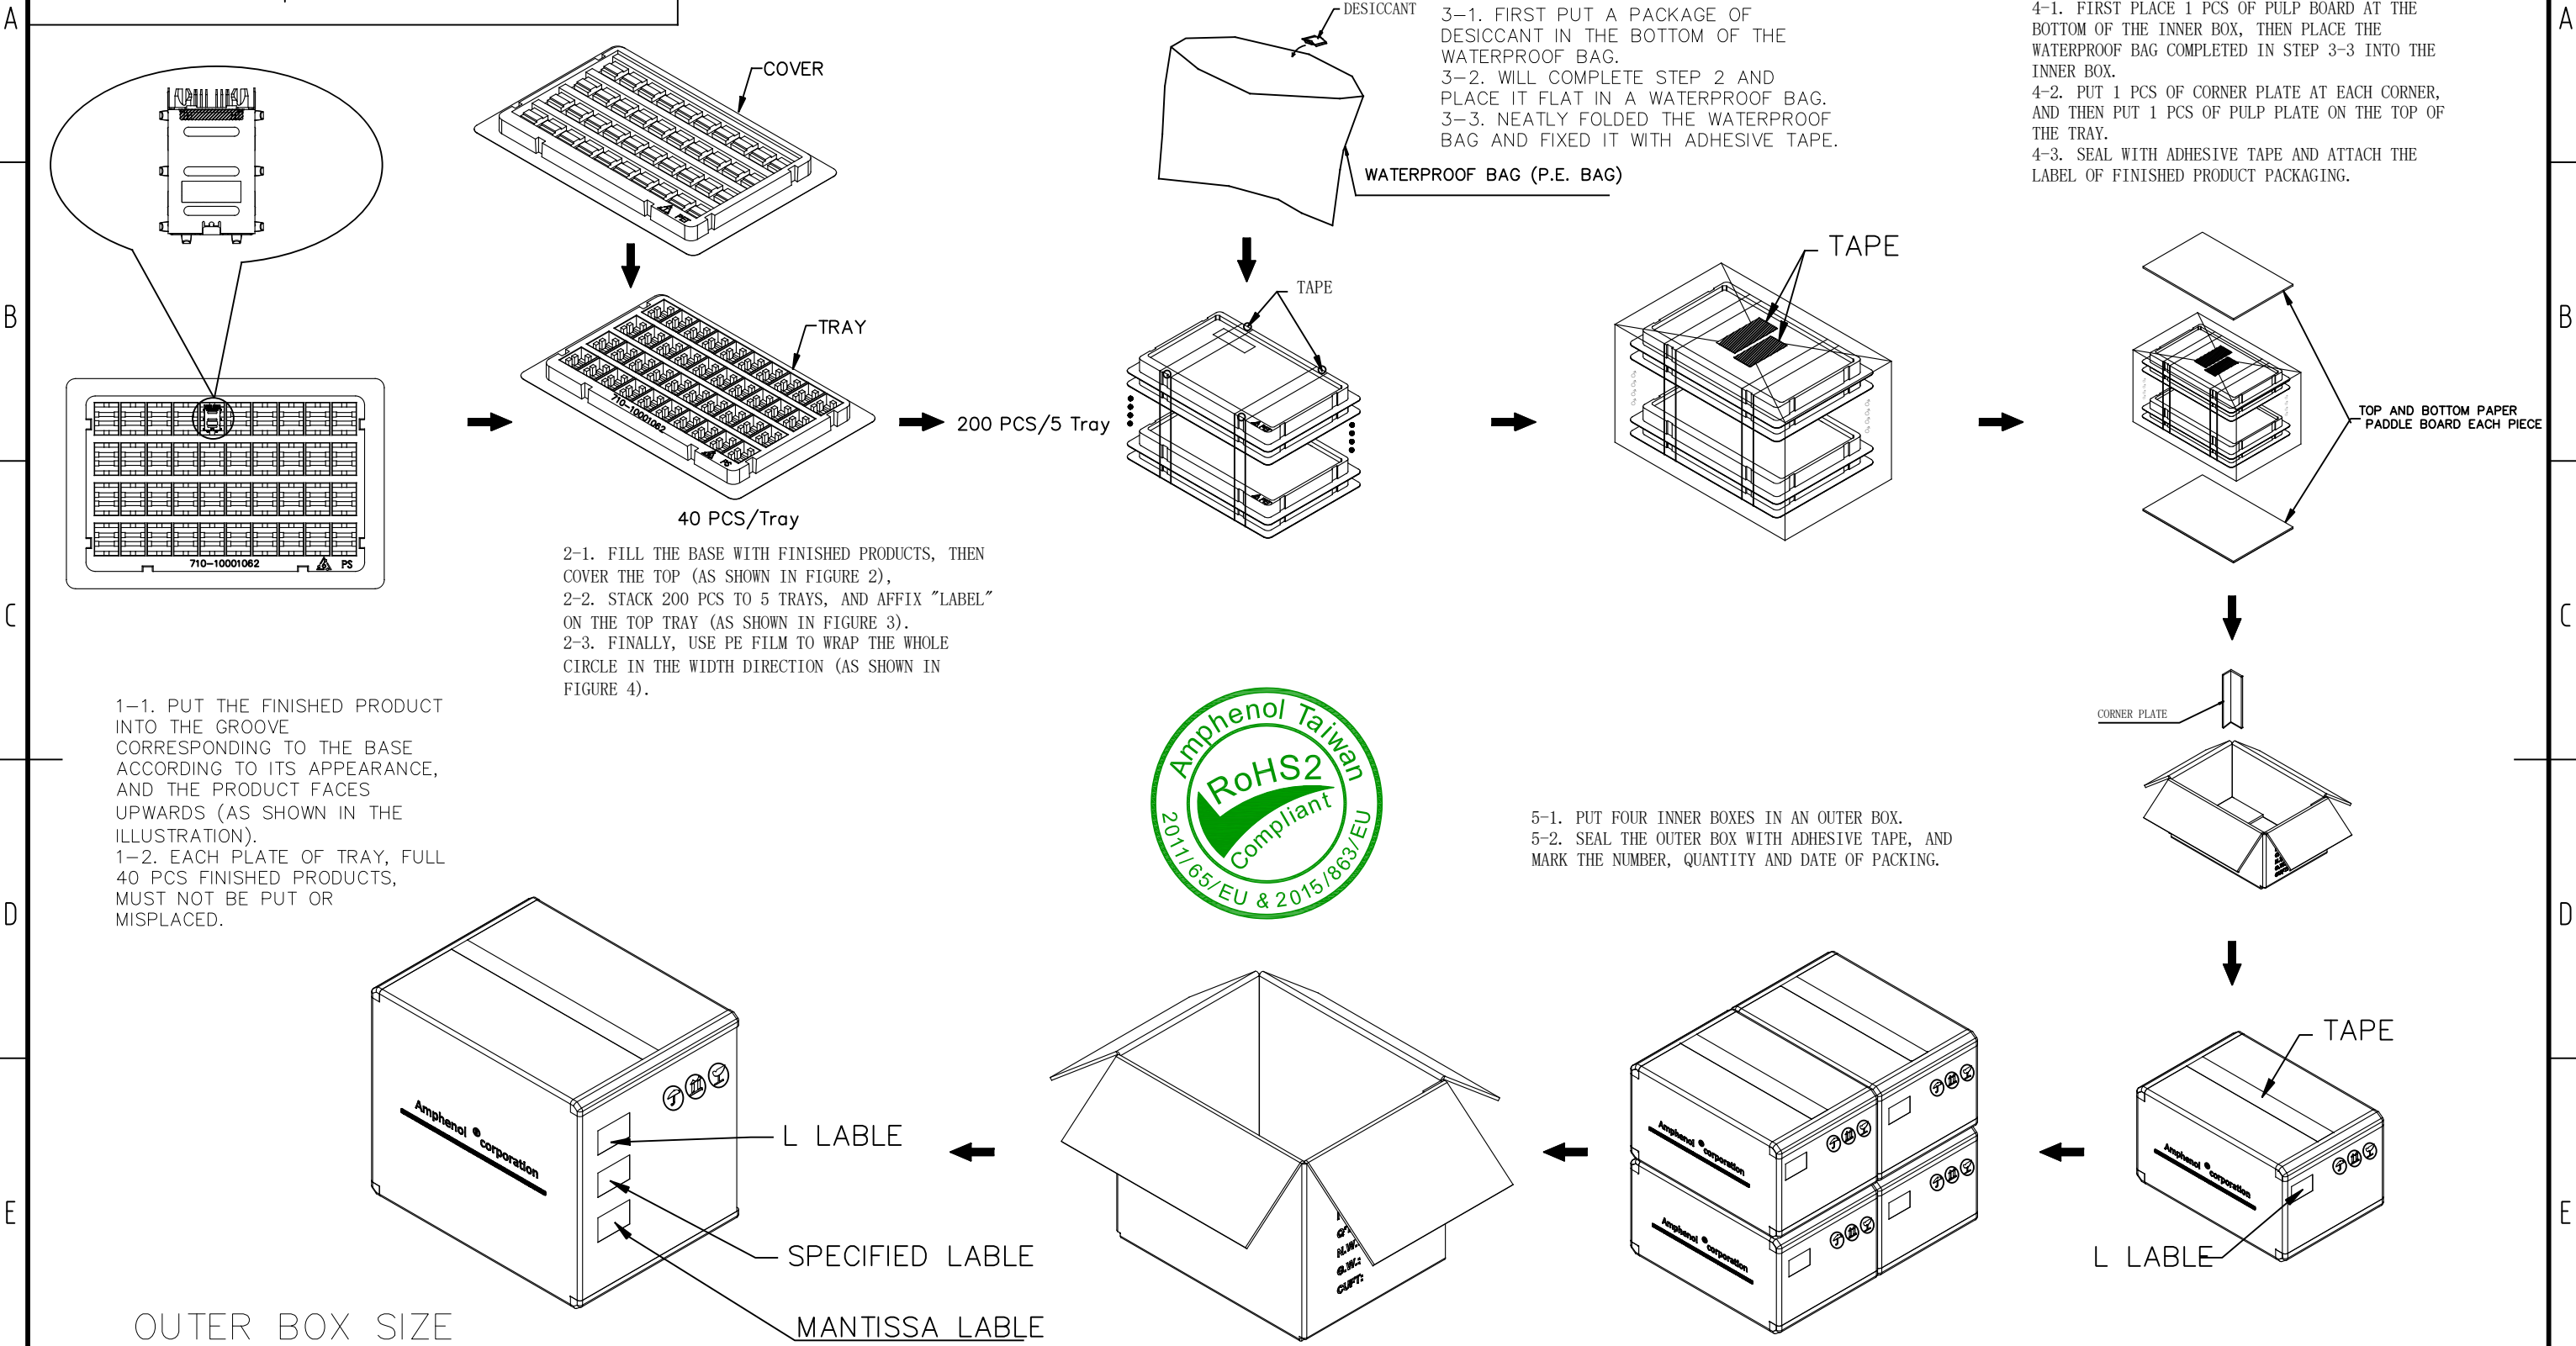

PRODUCT		PCS PER TRAY	PCS PER INNER BOX	PCS PER OUTER BOX
SERIES	PORTS			
RJMG221K	RJ2x1	40	200	800

TOLERANCE	DRAWN	APPROVALS	DATE	TITLE RJMG221X SERIES 1000 BASE-T WITH LED OPTION			Amphenol® Amphenol Corporation Amphenol Taiwan Corporation		
X. X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 ANGULAR ±2°	DESIGNED	Benly Han	09/06/2021						
	CHECKED	Vivian Wen	09/06/2021						
	APPROVED	Roger Tsai	09/06/2021						
UNLESS OTHERWISE SPECIFIED	DWG TYPE	CUST DWG	PROJECT CODE RJMG		UNIT mm	SIZE A3	PART No. RJMG221KVXXW0XR		
					SCALE NA	SHEET 3 OF 3	DWG No. RJMG221KVXXW0XR	REV. AX3	