

Sheet: /

File: labio.sch

Title:



Size: A4

Date:

KiCad E.D.A. kicad 4.0.0-stable

Rev:

Id: 1/8

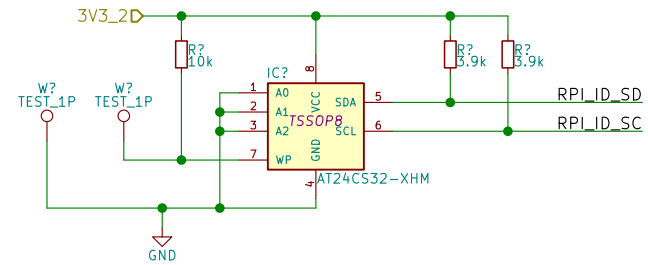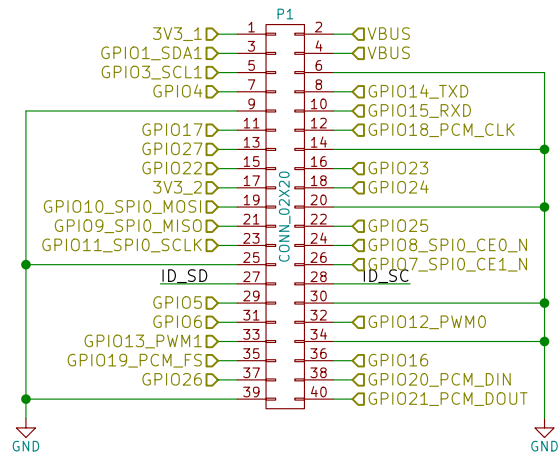


Sheet: /labio-rpi/
File: labio-rpi.sch

Title:

Size: A4
KiCad E.D.A. kicad 4.0.0-stable

Date:

Rev:
Id: 2/8

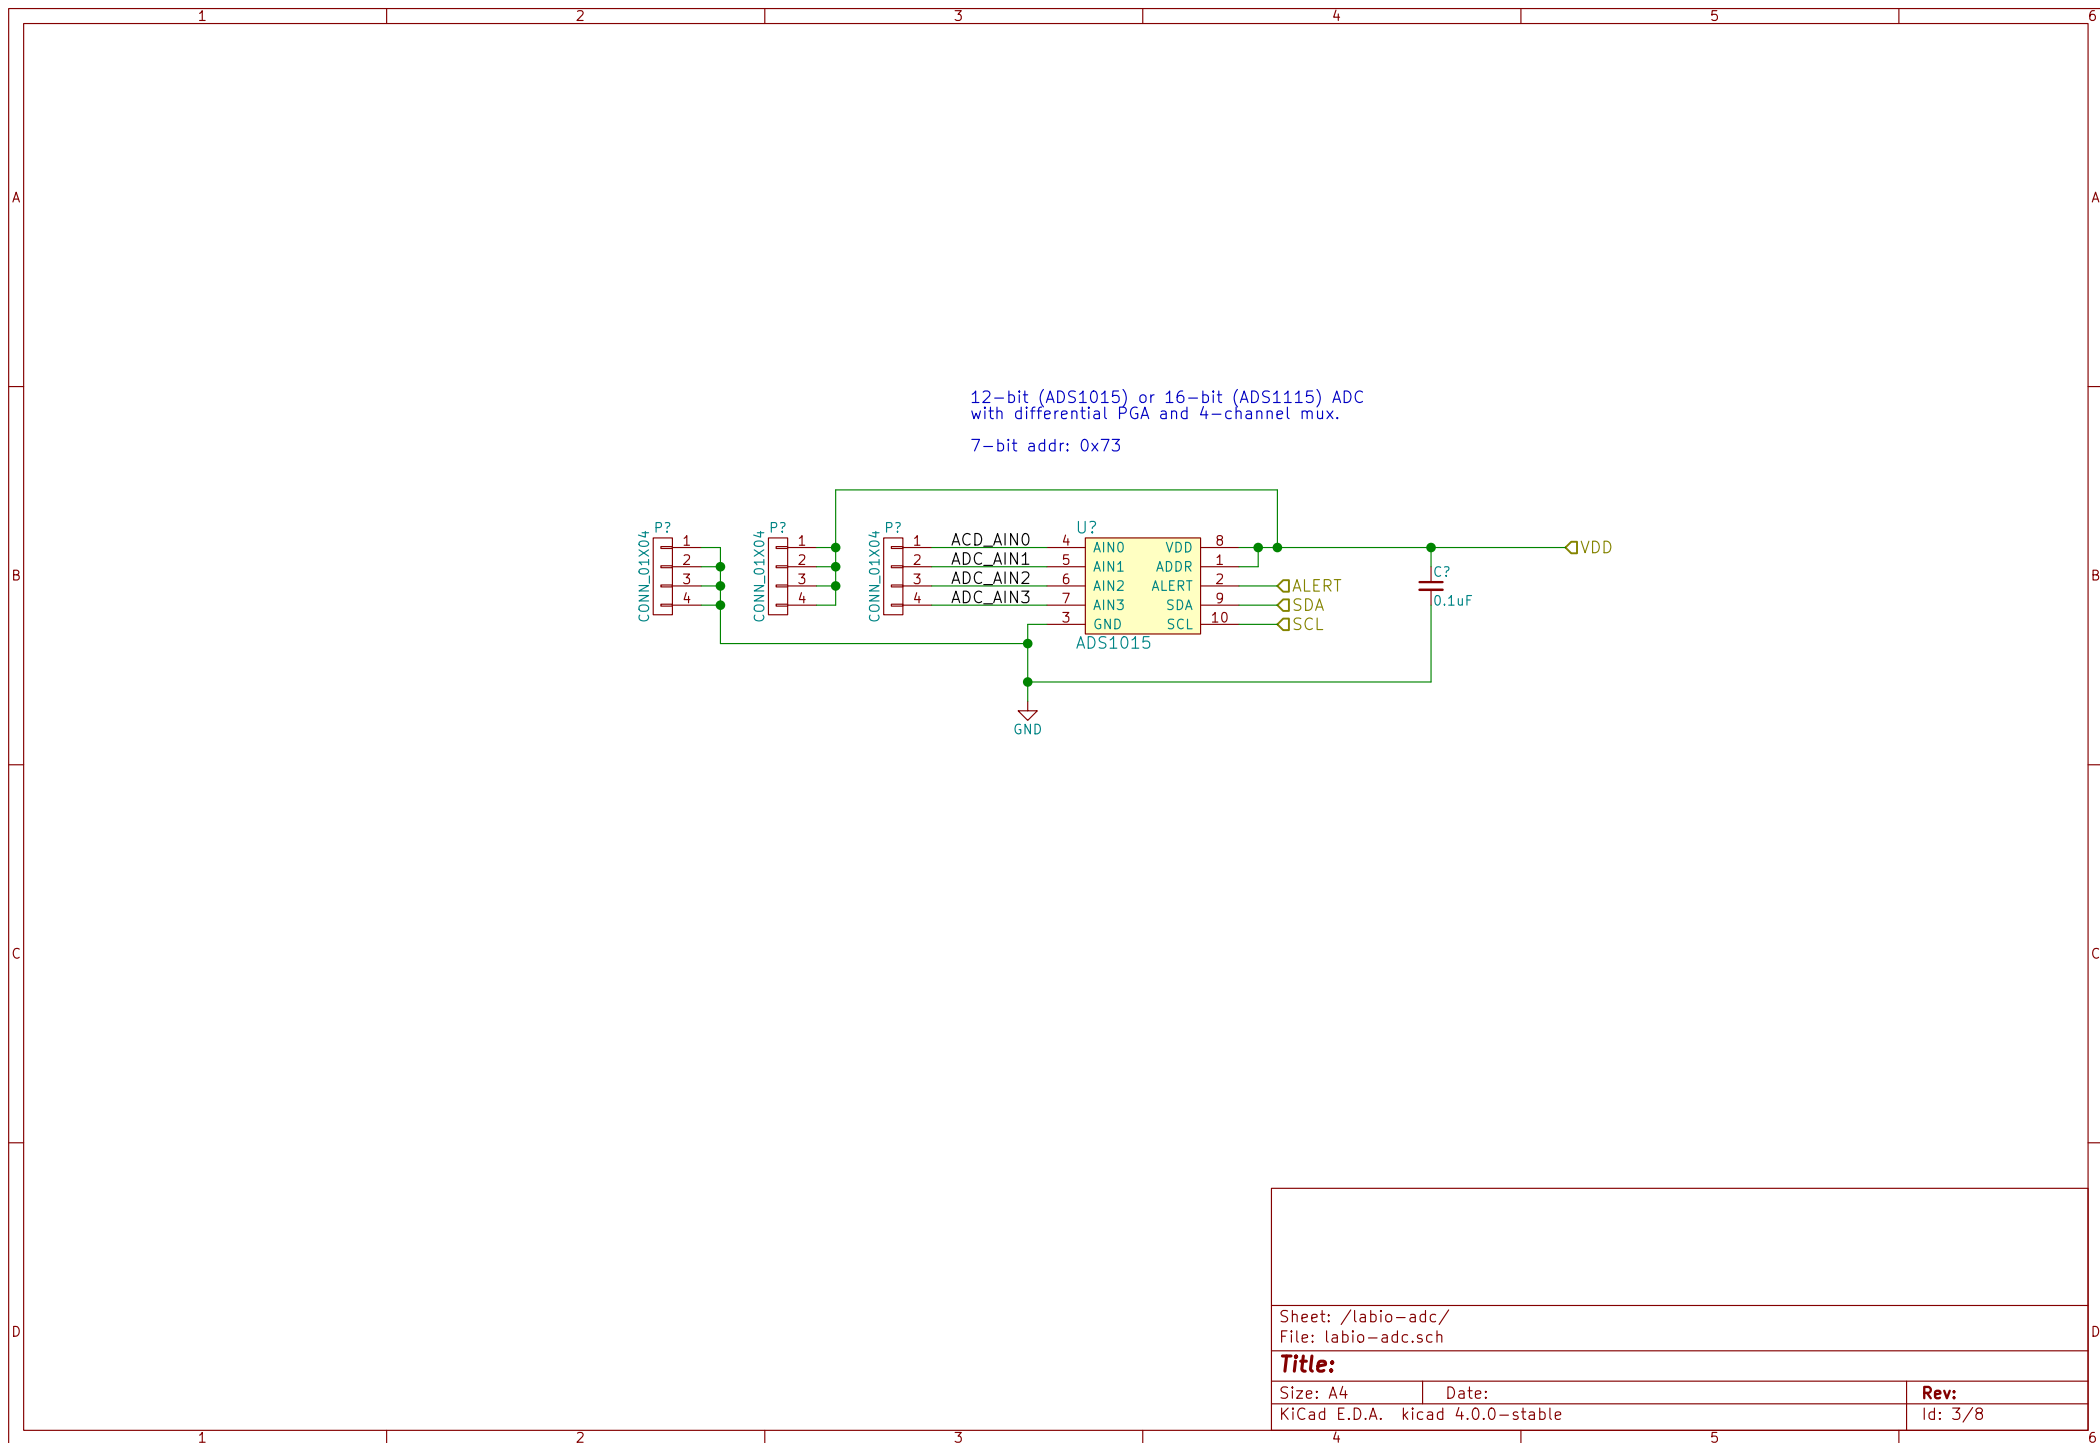


Sheet: /labio-adc/
File: labio-adc.sch

Title:


Size: A4 Date:
KiCad E.D.A. kicad 4.0.0-stable

Rev:
Id: 3/8

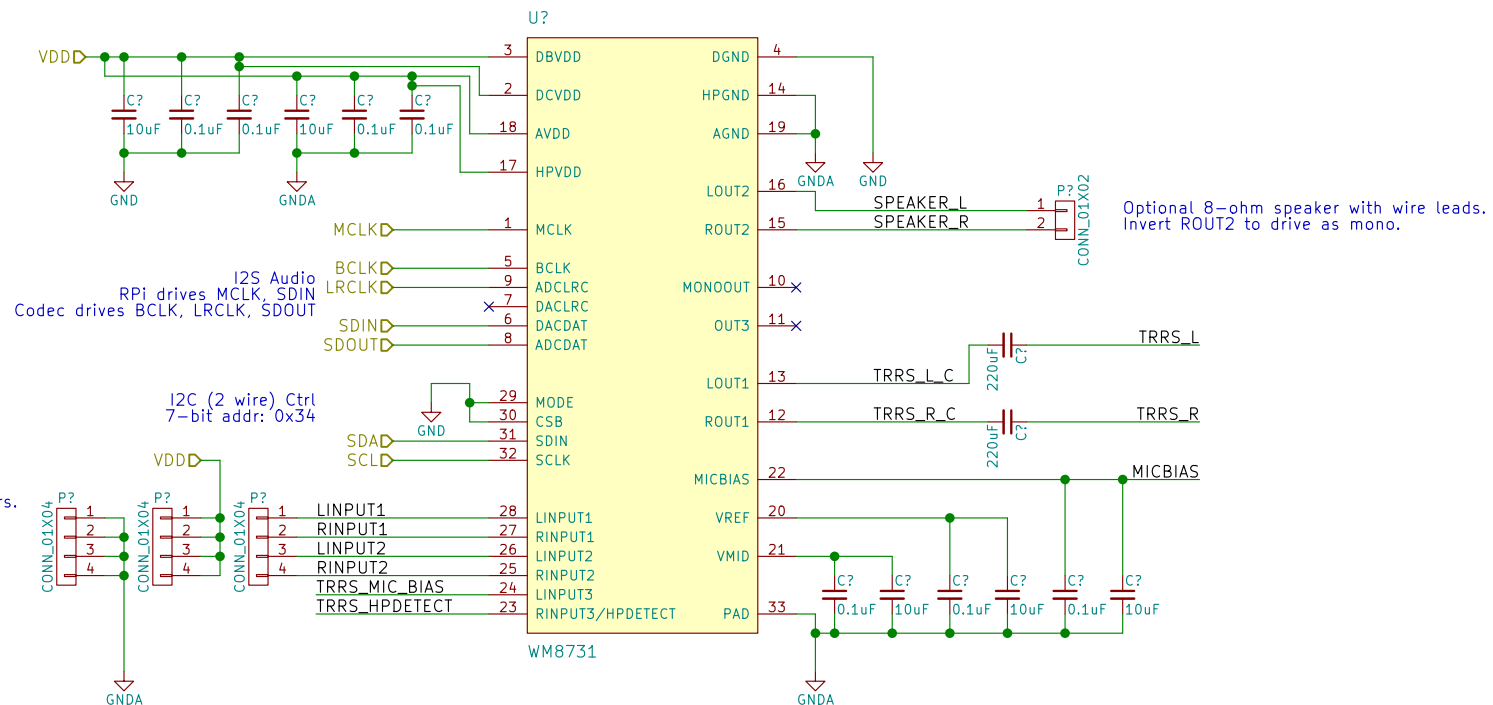


Extra codec inputs on GSV headers.
L/RINPUT1 can be used as
DC ADC (no PGA).
L/RINPUT1 or L/RINPUT2
can form differential input.

MEMS Microphone

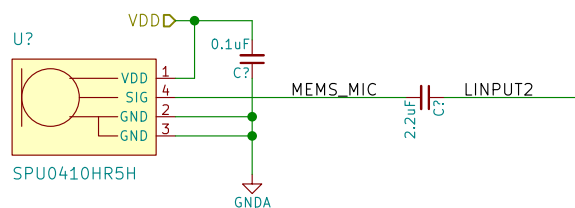

Headset mic bias
Suggested by WM8750BL datasheet (pg. 56).

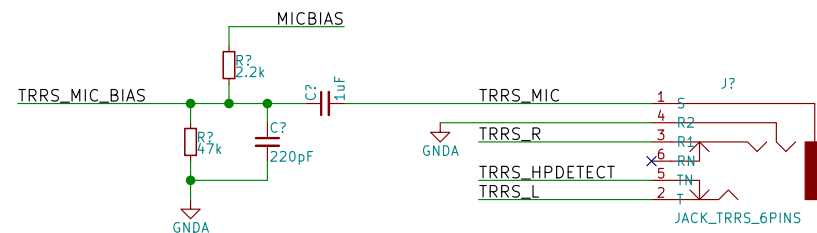

TRRS headset connector
for typical smartphone headset.

TRRS headset connector
for typical smartphone headset.

Sheet: /labio-audio/
File: labio-audio.sch

Title:

Size: A4


Date:

KiCad E.D.A. kicad 4.0.0-stable

Rev:

Id: 4/8

CFAL12832D-B* OLED Display
3-wire SPI mode.

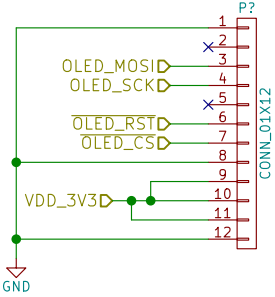

Sheet: /labio-display/
File: labio-display.sch

Title:


Size: A4
KiCad E.D.A. kicad 4.0.0-stable

Date:

Rev:
Id: 5/8

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6

Sheet: /labio-accel/ File: labio-accel.sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad 4.0.0-stable		Id: 6/8

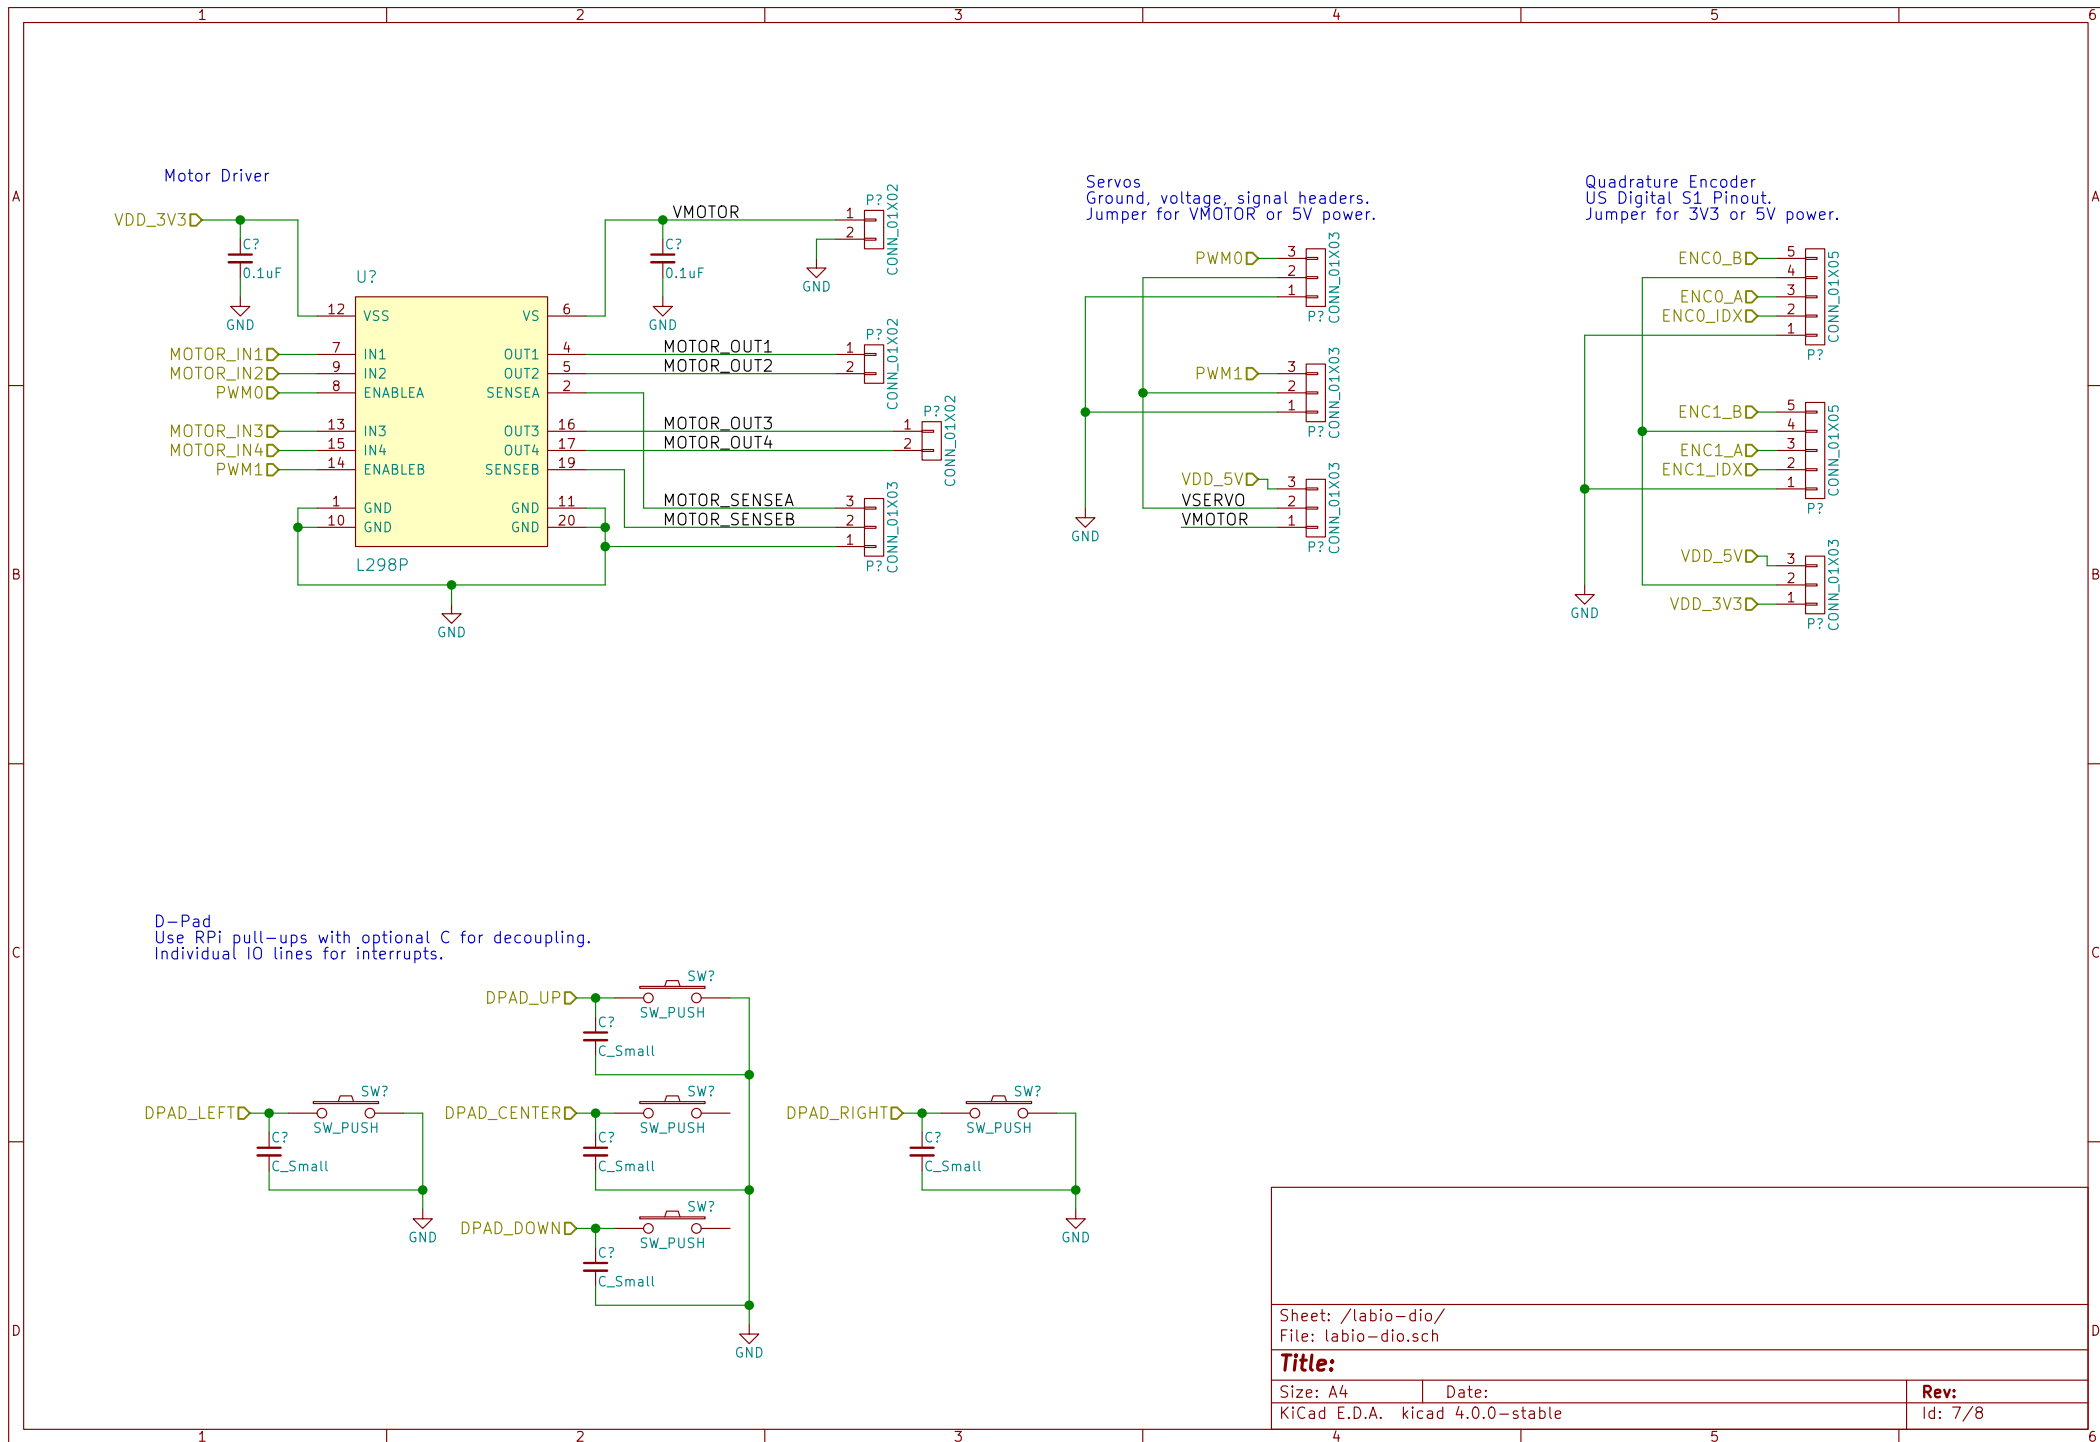

	1	2	3	4	5	6
A						
B						
C						
D						
	1	2	3	4	5	6

Sheet: /labio-power/ File: labio-power.sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad 4.0.0-stable		Id: 8/8