
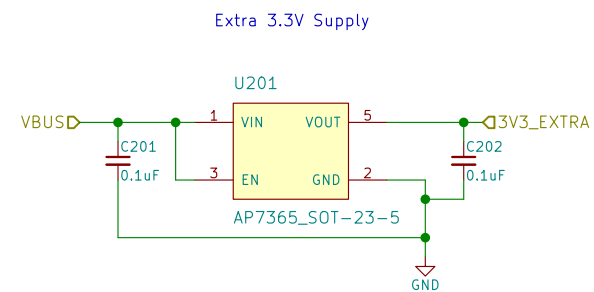
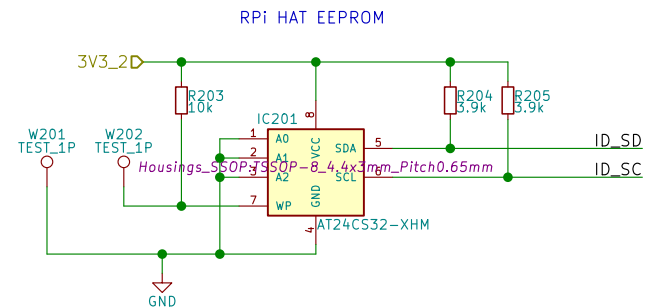


Pi Model B+			
3V3	1	2	4V
GPIO2	3	4	4V
GPIO3	5	6	Ground
GPIO4	7	8	GPIO14
Ground	9	10	GPIO15
GPIO17	11	12	GPIO18
GPIO27	13	14	Ground
GPIO23	15	16	GPIO23
3V3	17	18	GPIO24
GPIO10	19	20	Ground
GPIO5	21	22	GPIO25
GPIO11	23	24	GPIO8
Ground	25	26	GPIO7
ID_SD	27	28	ID_SC
GPIO5	29	30	Ground
GPIO6	31	32	GPIO12
GPIO13	33	34	Ground
GPIO19	35	36	GPIO16
GPIO26	37	38	GPIO20
Ground	39	40	GPIO21

www.raspberrypi.org/docs/hw/faq

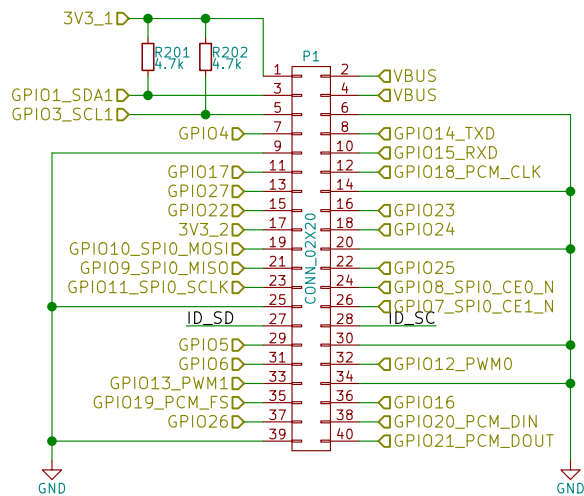

Sheet: /labio-rpi/
File: labio-rpi.sch


Title:

Size: A4
KiCad E.D.A. kicad 4.0.0-stable

Date:

Rev:
Id: 2/10



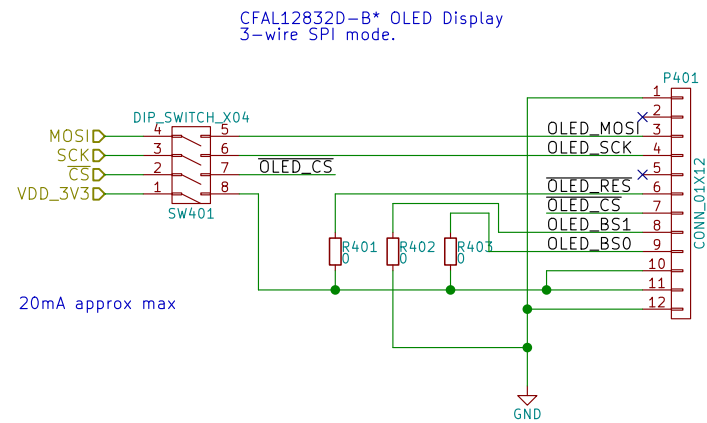

Interface				
Pin No	Sym	3 Wire SPI	4 Wire SPI	I2C
1	GND	GND	GND	GND
2	D2	NC	NC	SDA*
3	D1	SDA	SDA	SDA*
4	D0	CLK	SCLK	SCL
5	D/C#	NC	D/C	Vcc
6	RES#	RESET	RESET	RESET
7	CS#	GND	GND	GND
8	BS1	GND	GND	Vcc
9	BS0	Vcc	GND	GND
10	Vdd	Vcc**	Vcc**	Vcc**
11	Vbat	Vcc**	Vcc**	Vcc**
12	GND	GND	GND	GND


Microcontroller	Control lines defined by layout / code
+3.3v	Supply voltage
Ground	Supply ground
Notes:	
*	Tie D2 and D1 together
**	Okay to Tie Vdd and Vbat together

Sheet: /labio-display/
File: labio-display.sch

Title:


Size: A4 Date:
KiCad E.D.A. kicad 4.0.0-stable

Rev:
Id: 4/10

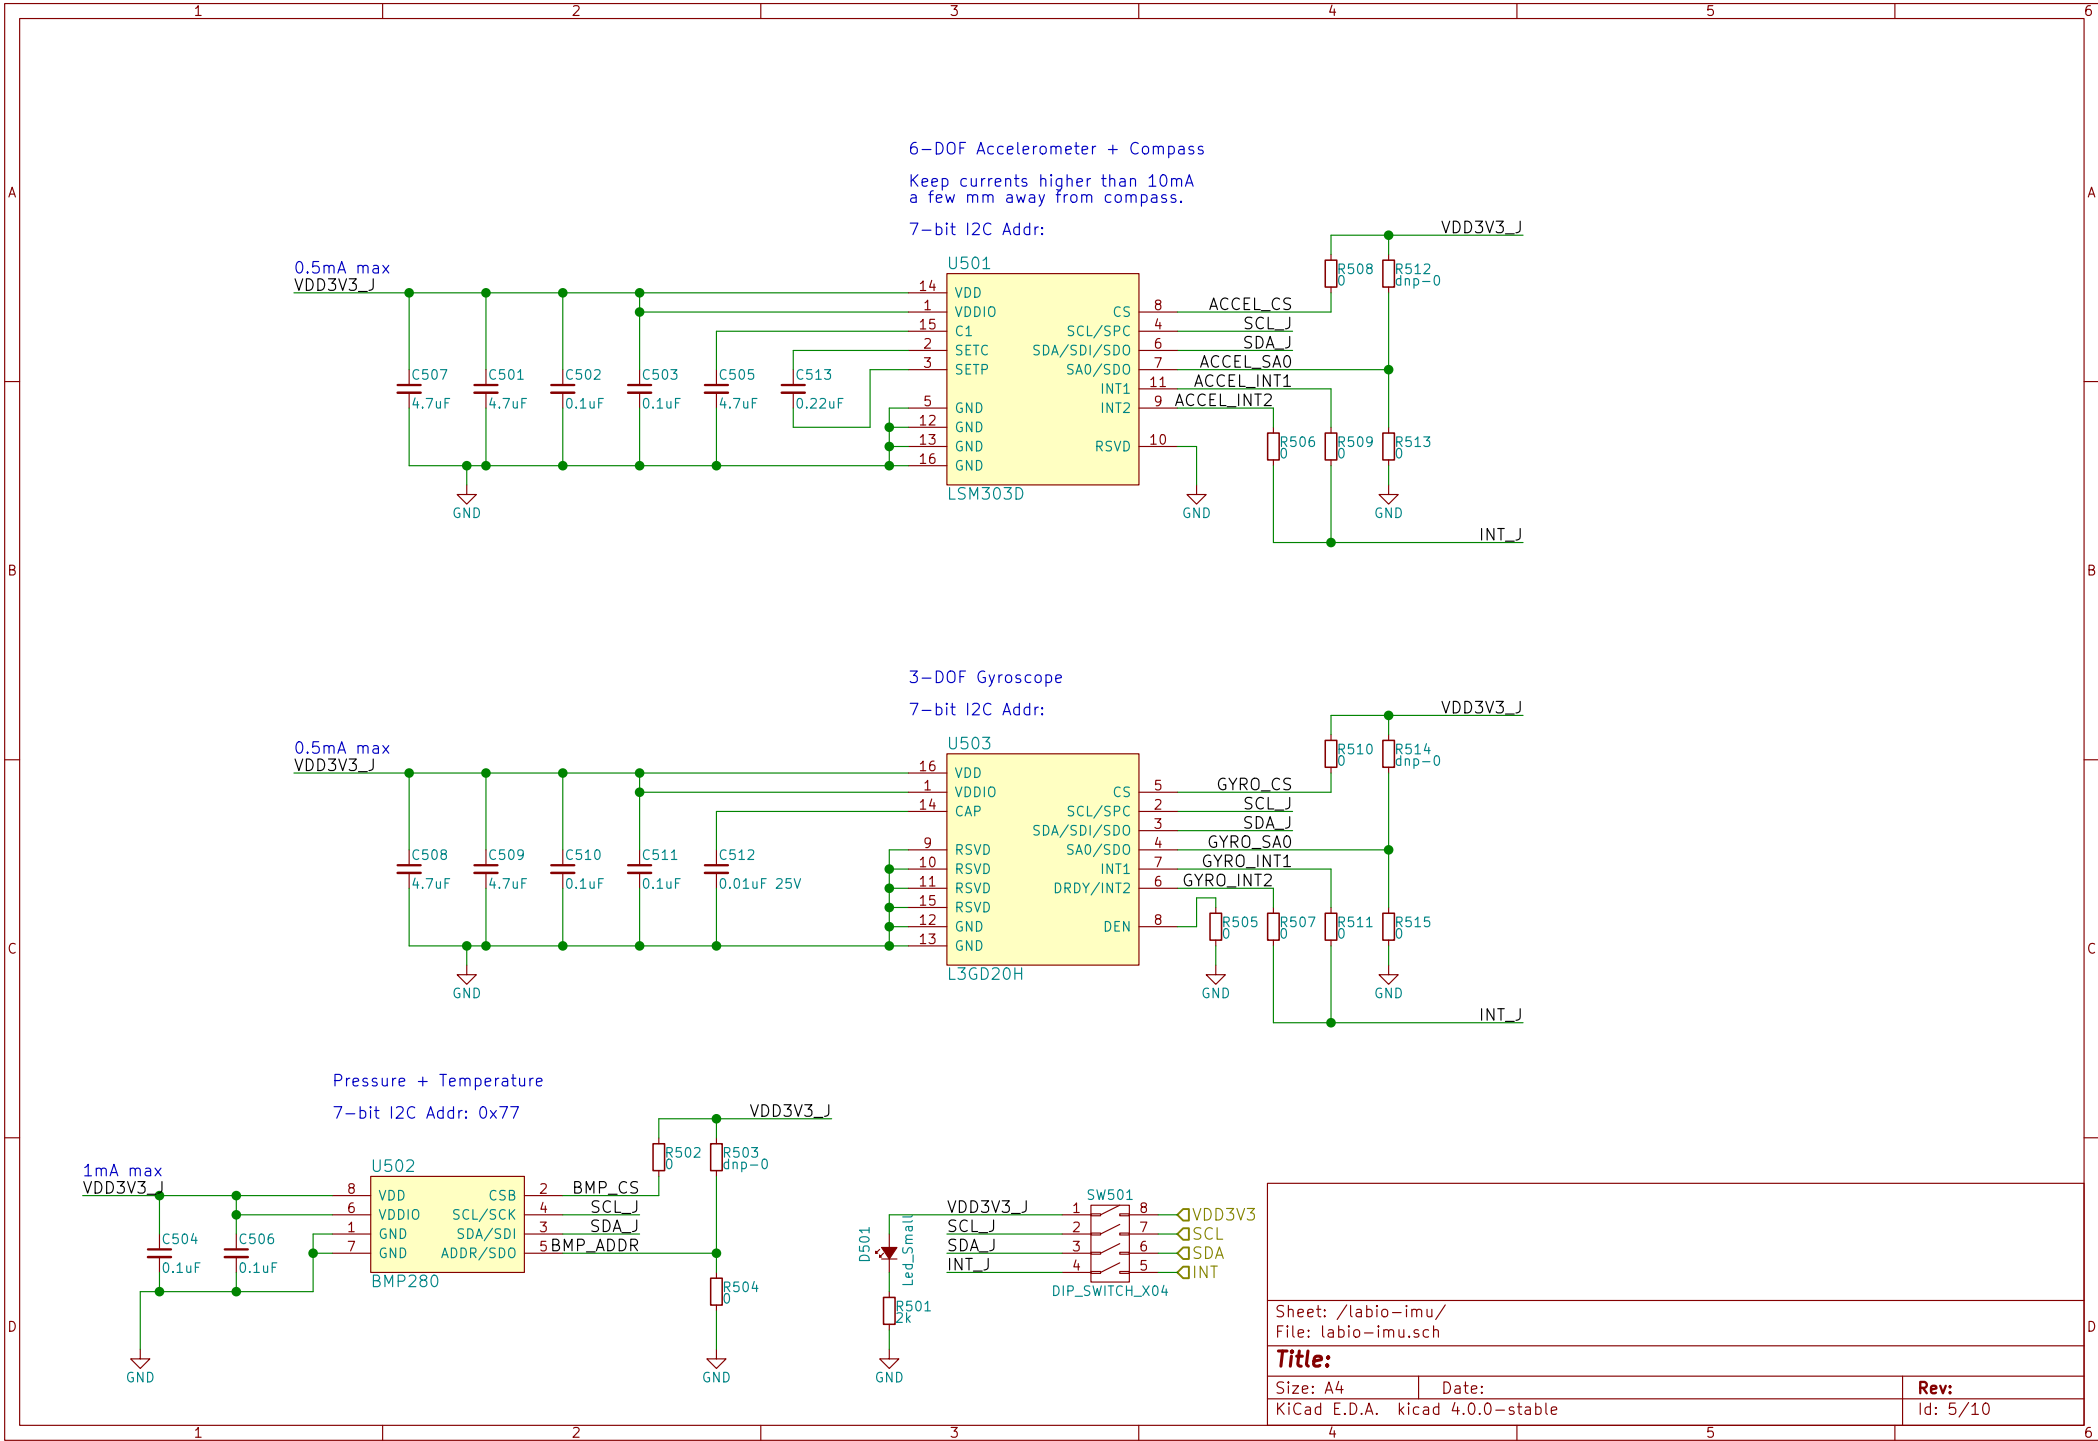


Motor Driver

2x DC Motors or 1x Bipolar Stepper Motor

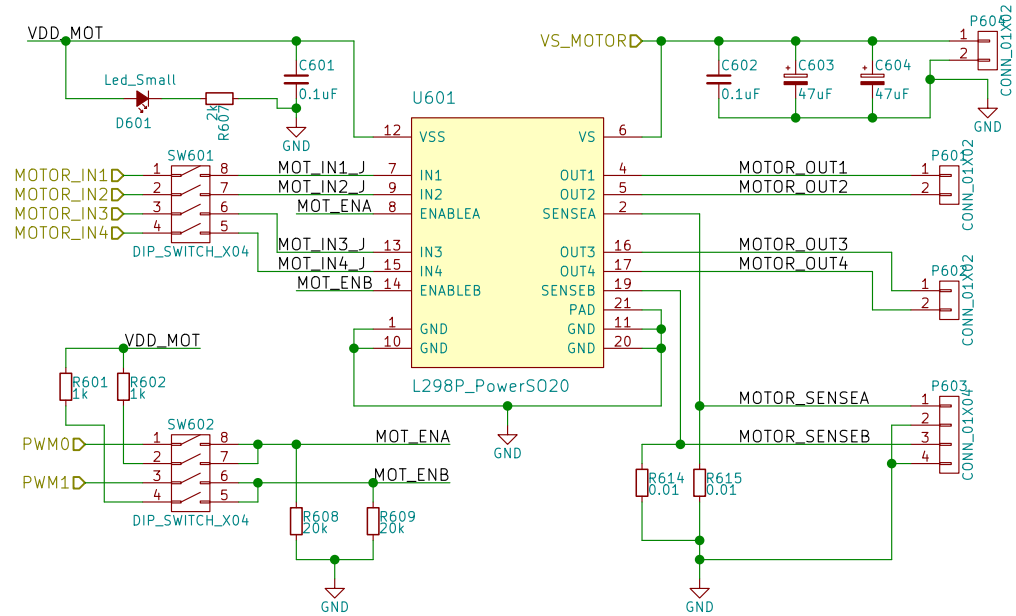


Servo Pins

Ground, voltage, signal headers.
Jumper for power source.

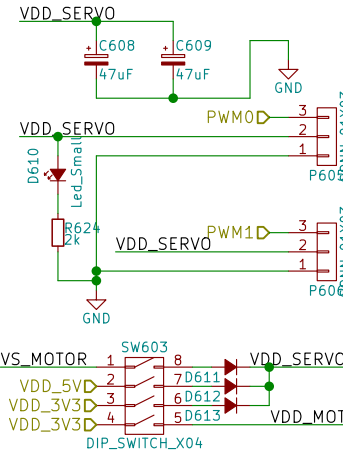


Quadrature Encoder Pins

US Digital S1 Pinout.
Jumper for power source.
Diodes for 5V levels and multiplexing.
Use RPi pull-ups.

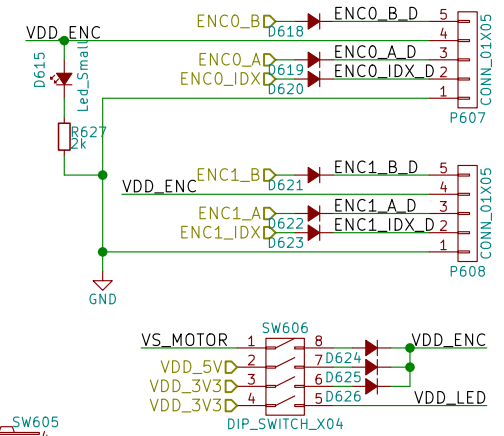


Quadrature Encoder (onboard)

Use RPi pull-ups.

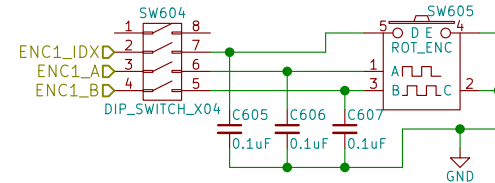

LED Indicators

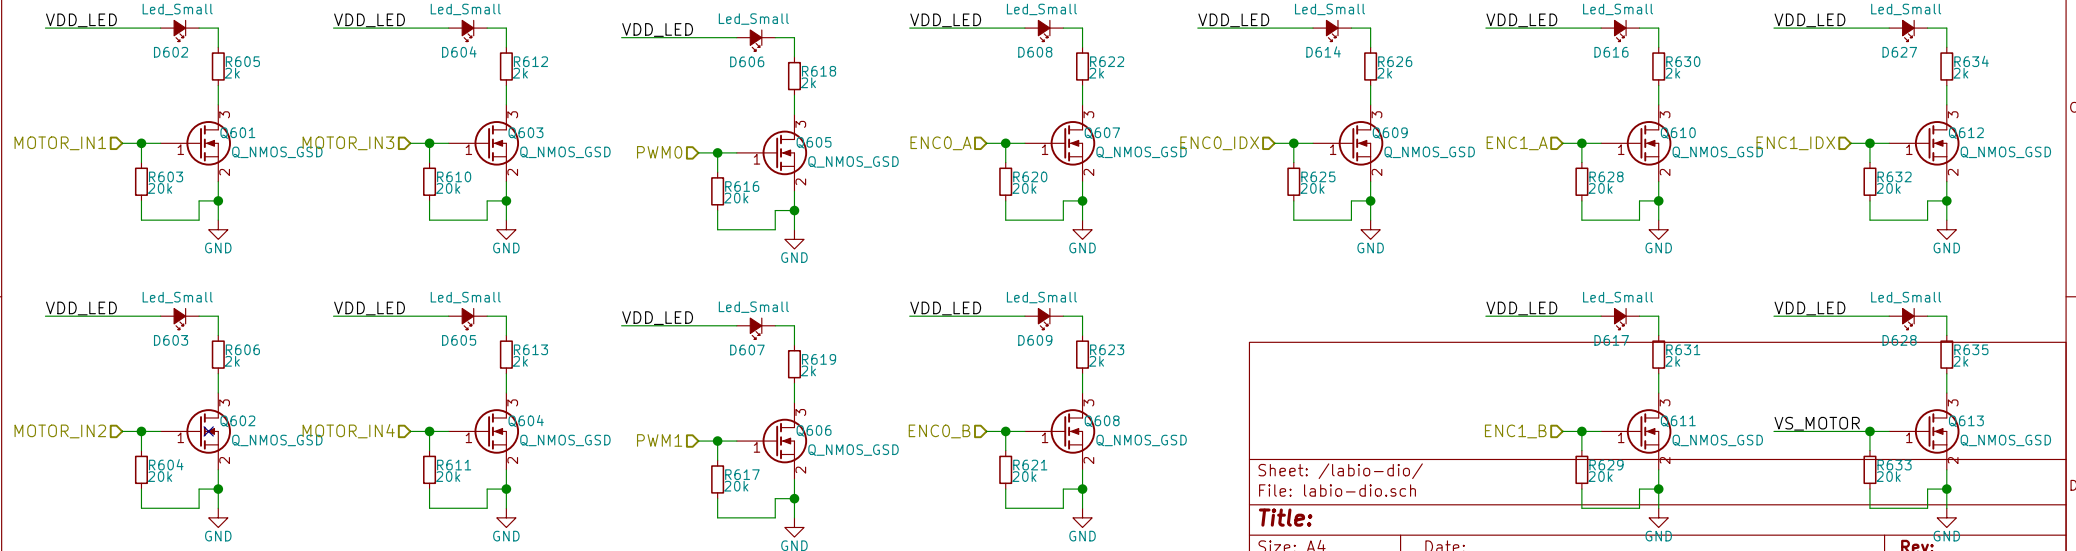


Sheet: /labio-dio/
File: labio-dio.sch

Title:

Size: A4
KiCad E.D.A. kicad 4.0.0-stable


Date:

Rev:
Id: 6/10

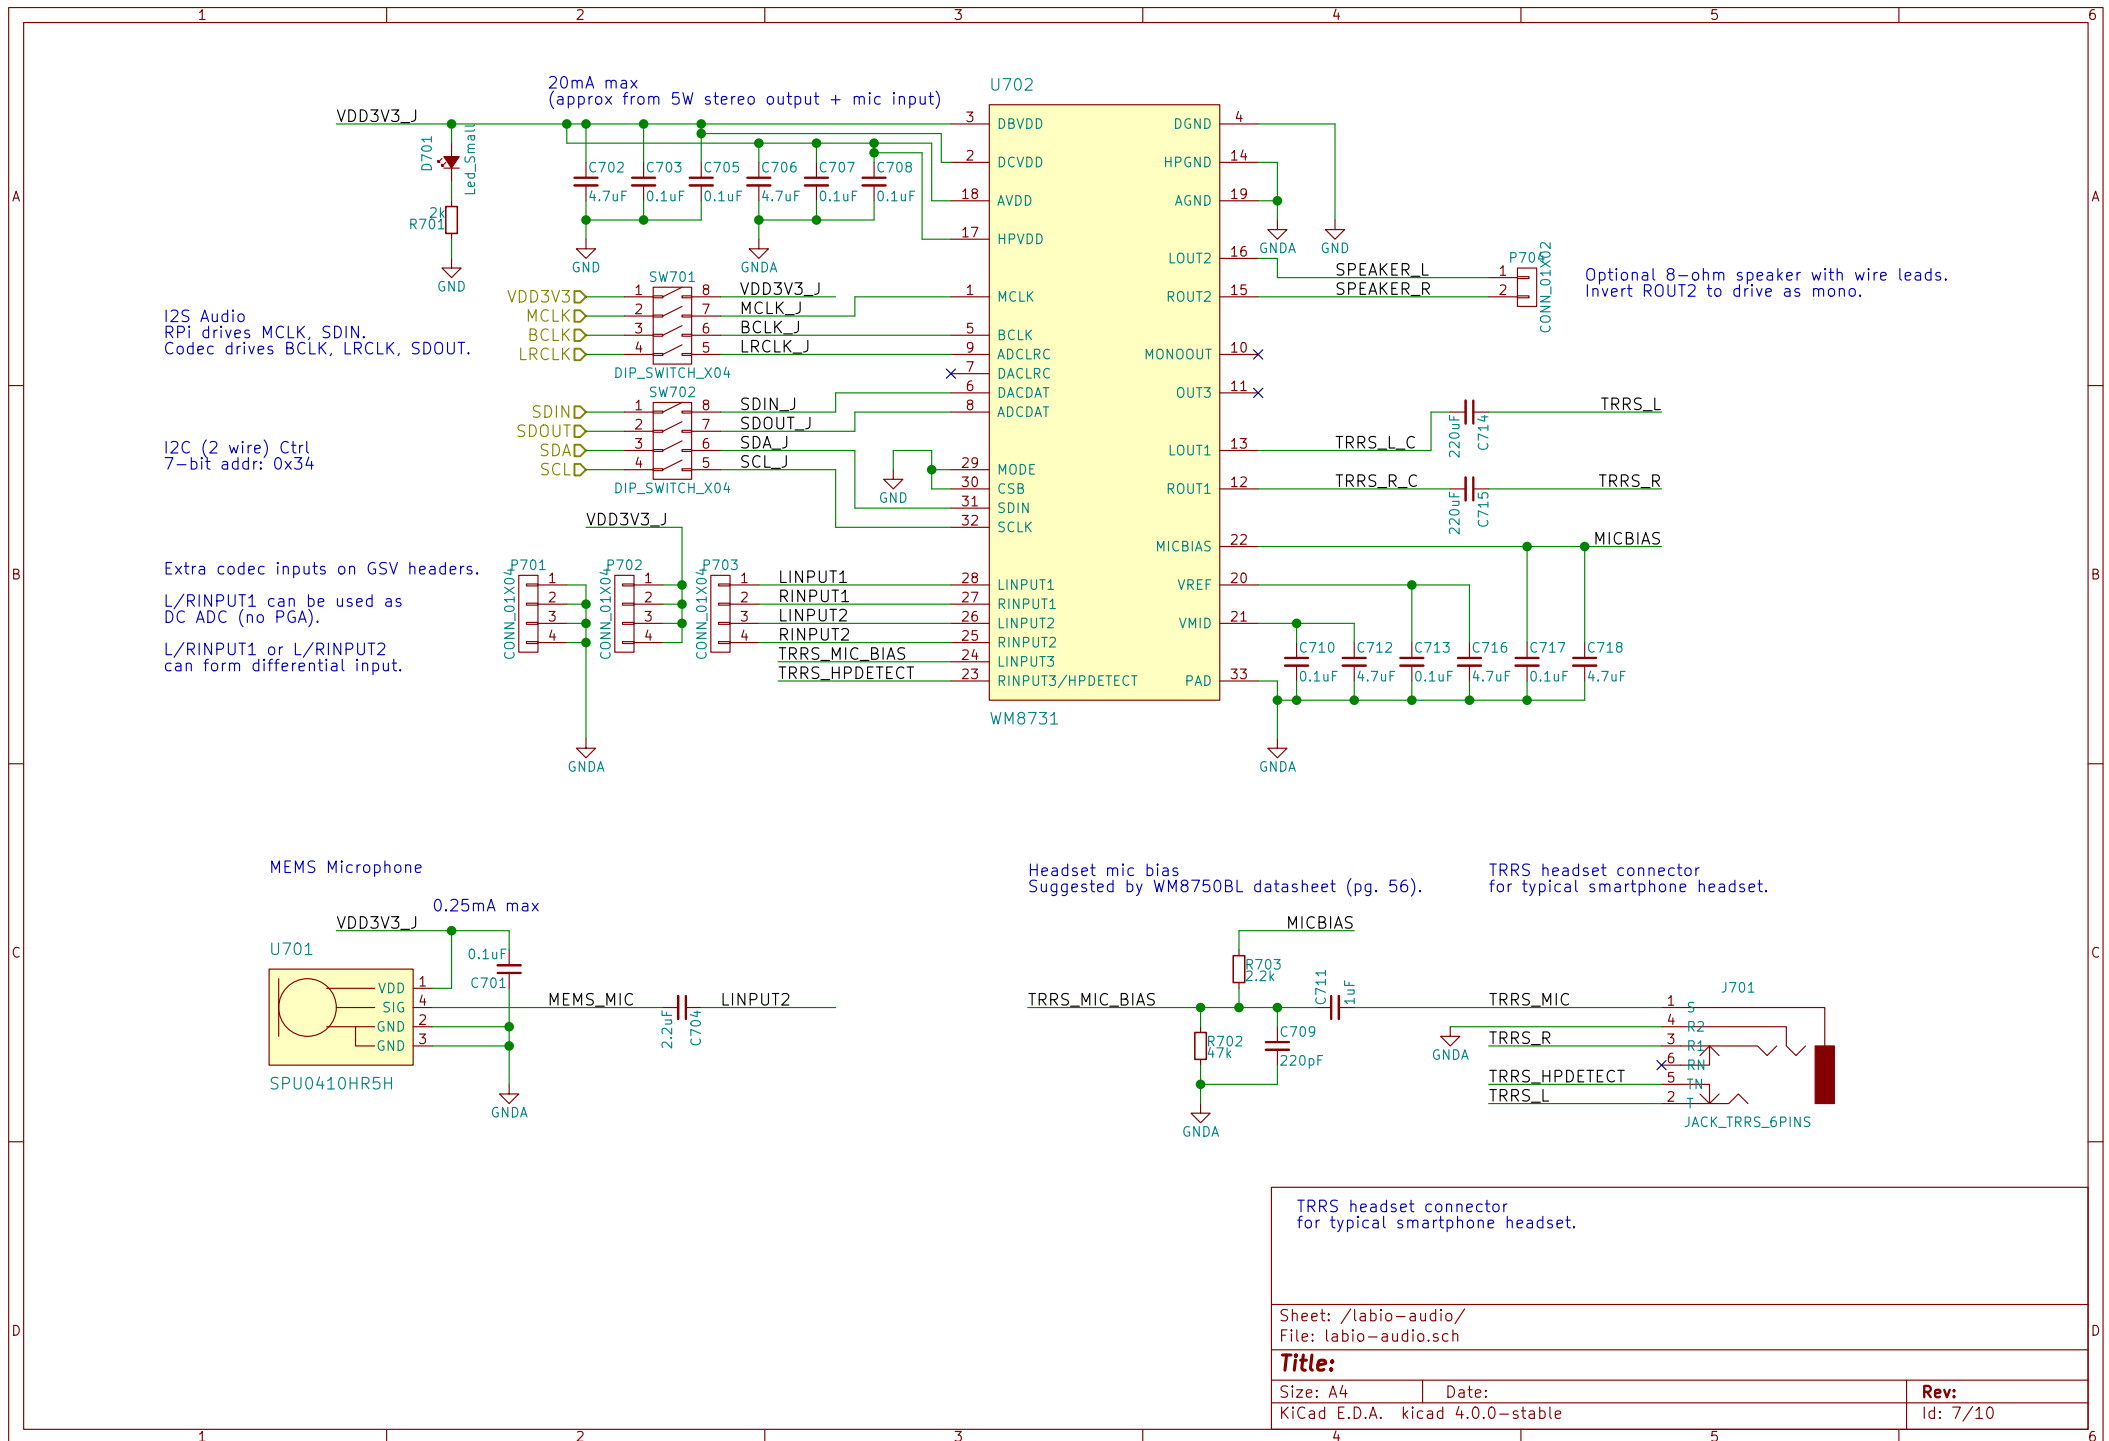

D-Pad

Use RPi pull-ups.
Optional C for decoupling.
Individual IO lines for interrupts.

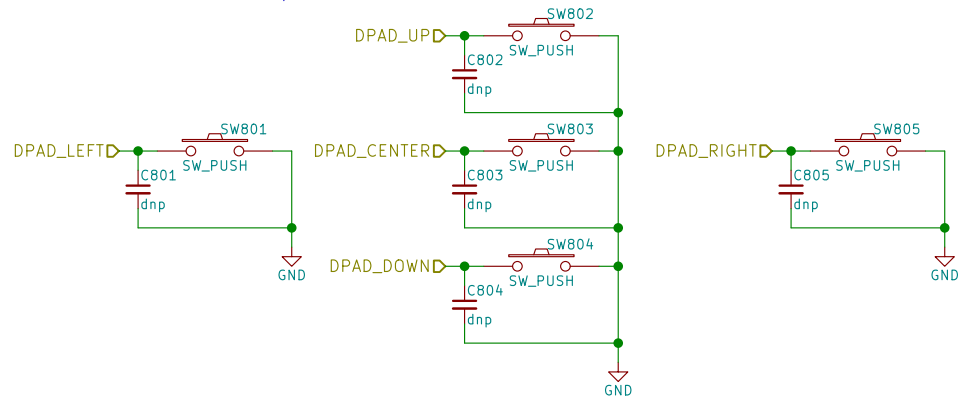

Sheet: /labio-dpad/
File: labio-dpad.sch

Title:


Size: A4
KiCad E.D.A. kicad 4.0.0-stable

Date:

Rev:
Id: 8/10

External Power (Future)

Provides logic and motor power from power supply or battery pack with possible charging from USB (rpi) power.
2x motor power for current rating.

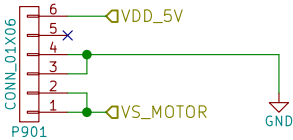

Sheet: /labio-power/
File: labio-power.sch

Title:


Size: A4

Date:

KiCad E.D.A. kicad 4.0.0-stable

Rev:


Id: 9/10

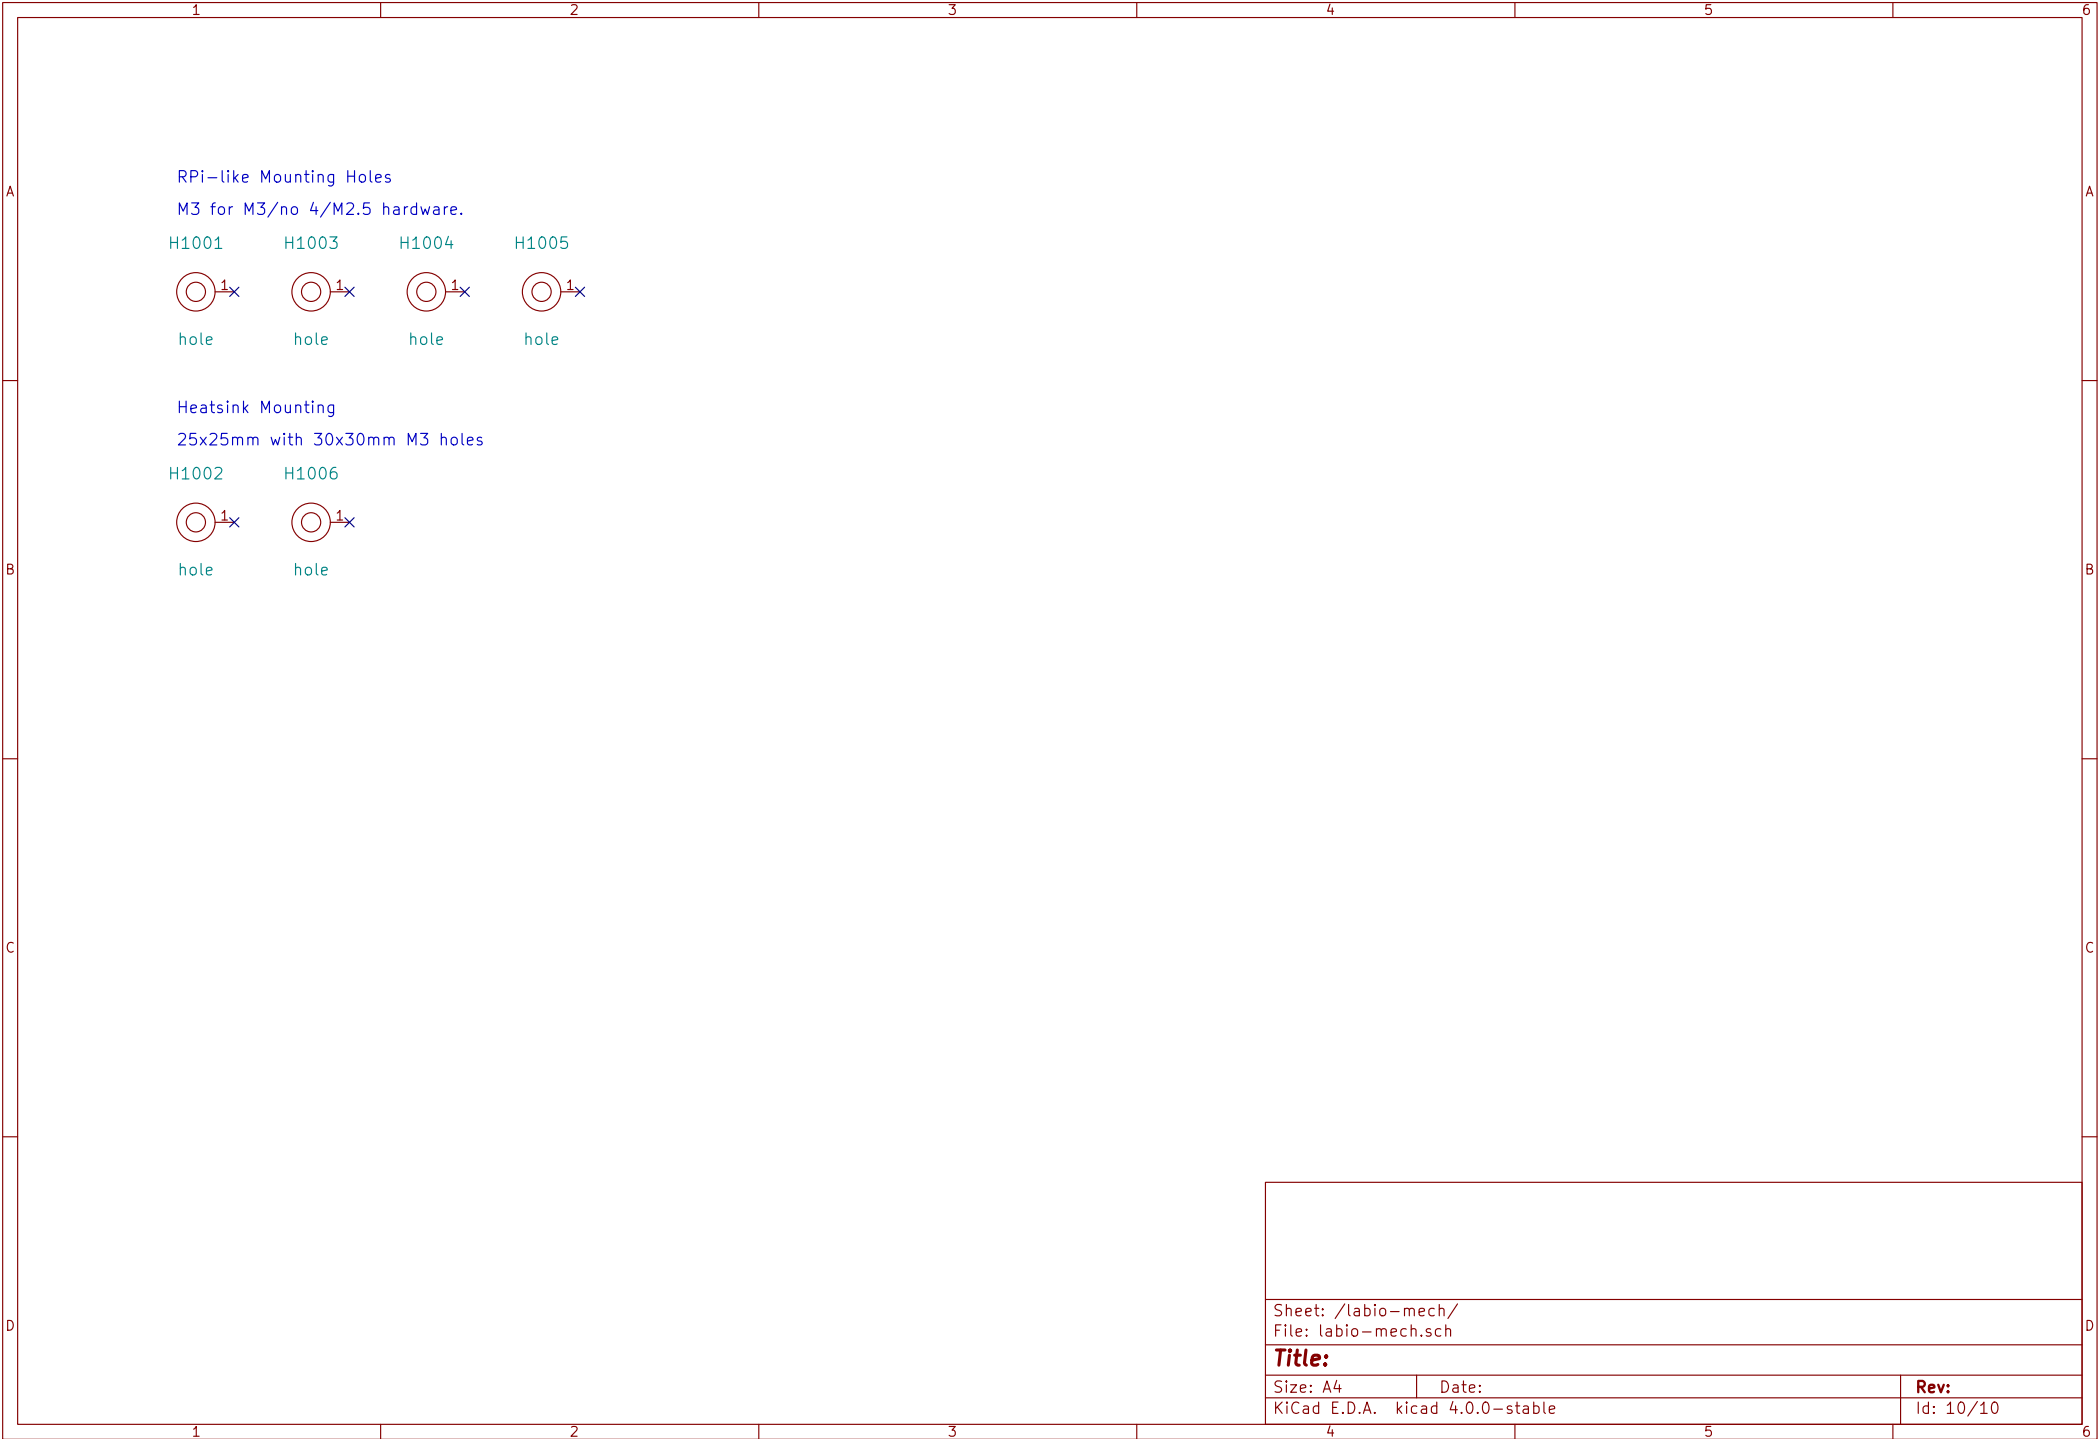

RPI-like Mounting Holes


M3 for M3/no 4/M2.5 hardware.

H1001




hole

H1003




hole

H1004



hole

H1005




hole

Heatsink Mounting


25x25mm with 30x30mm M3 holes

H1002



hole

H1006



hole

Sheet: /labio-mech/ File: labio-mech.sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad 4.0.0-stable		Id: 10/10