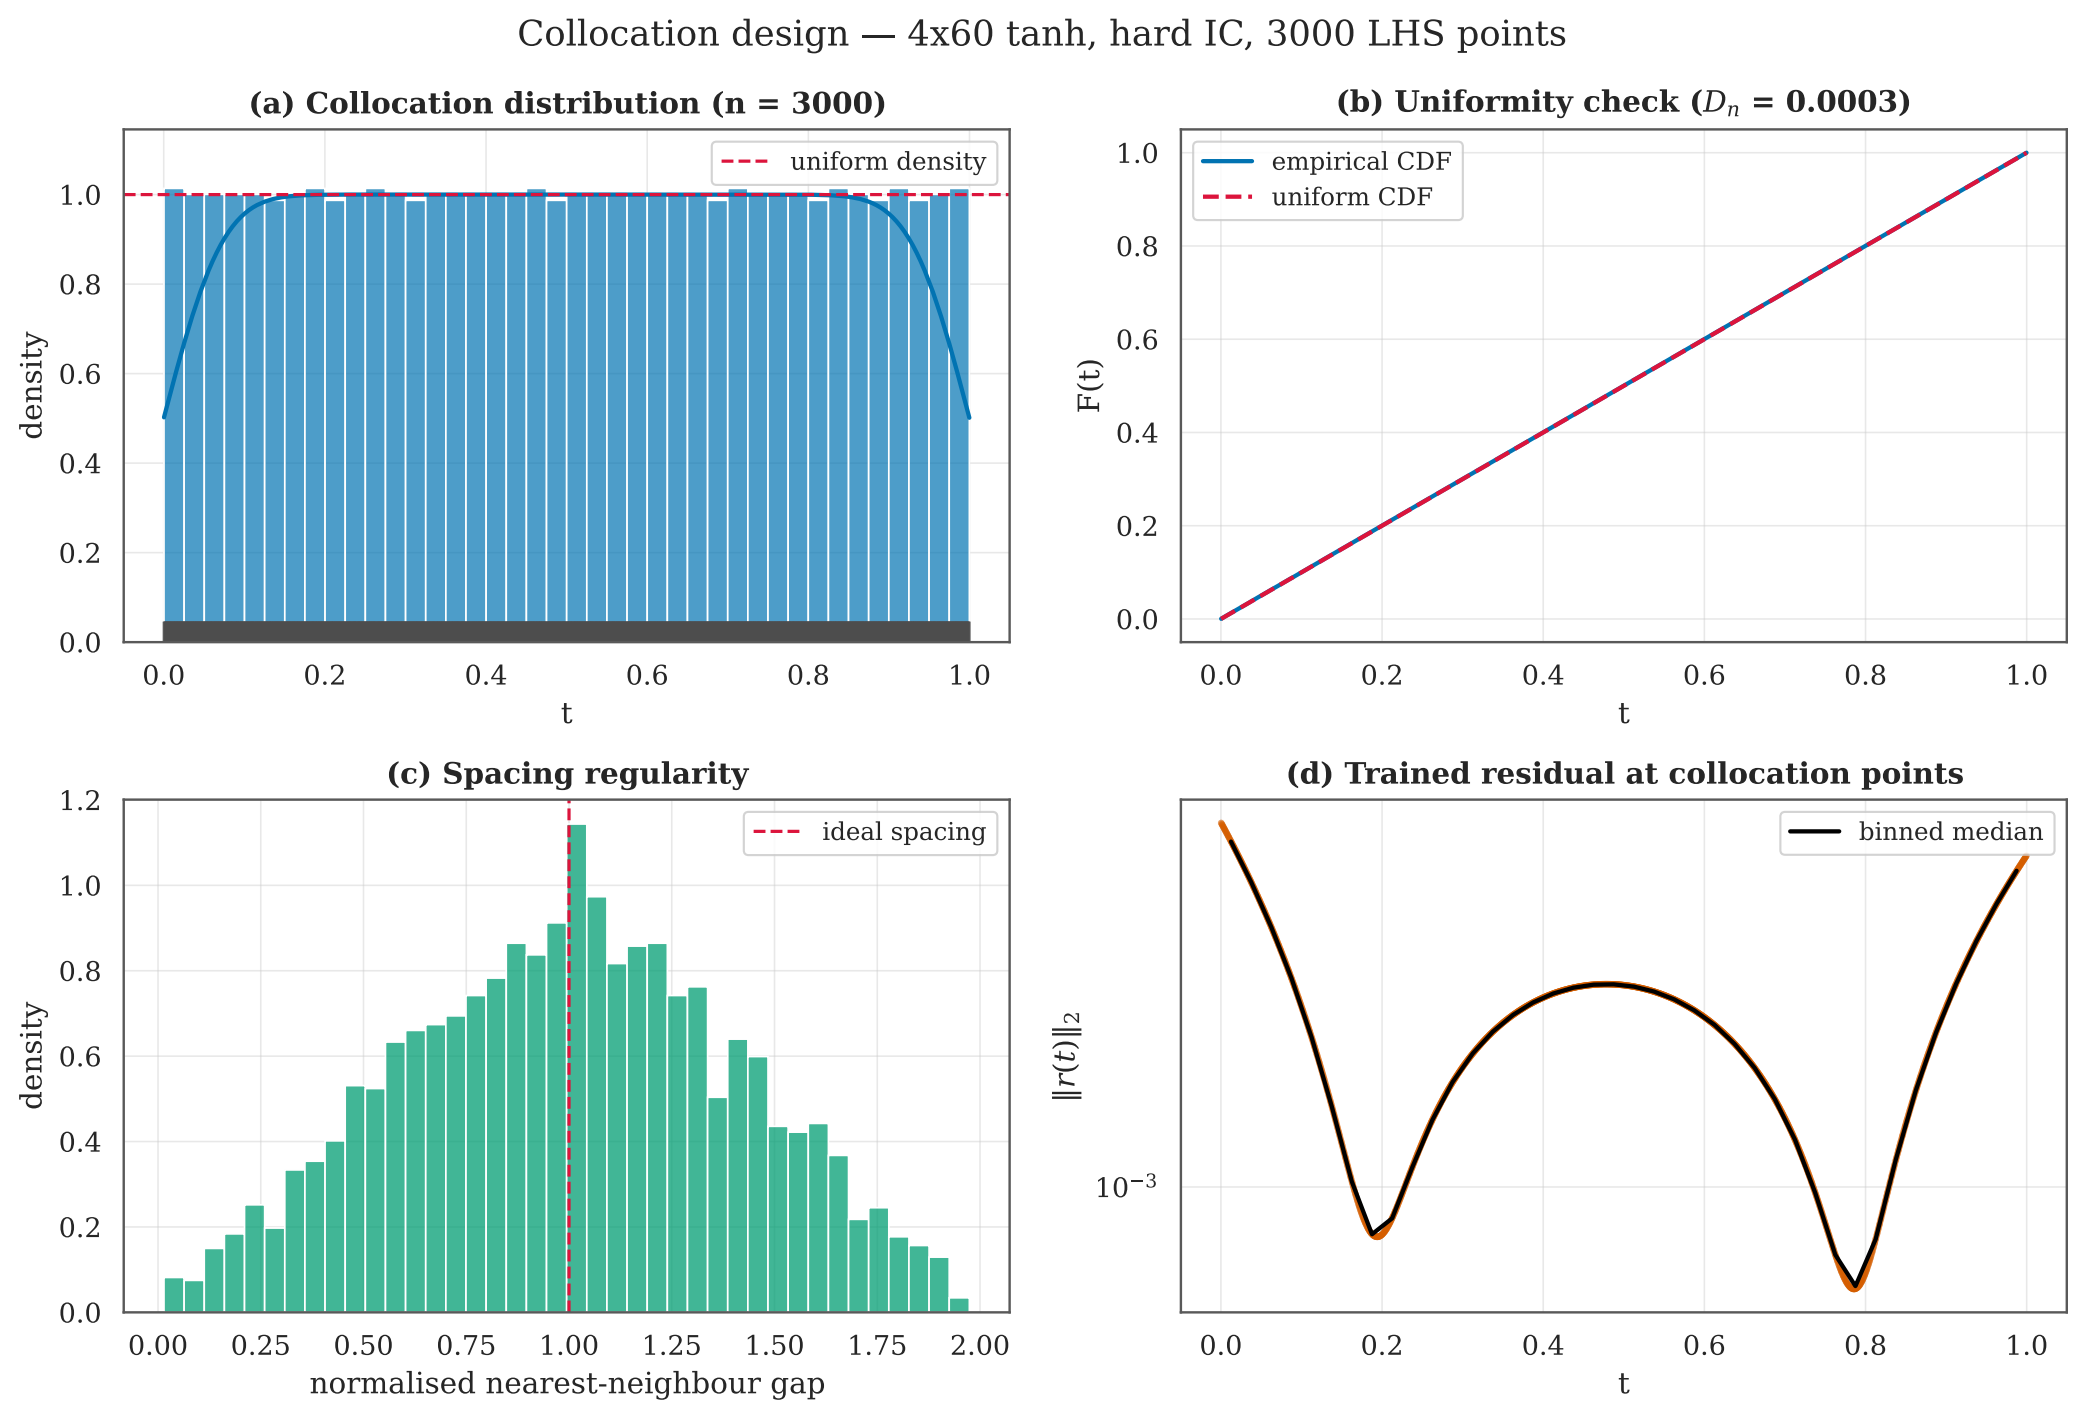

Collocation design — 4x60 tanh, hard IC, 3000 LHS points
(a) Collocation distribution (n = 3000)
uniform density
density
t
(b) Uniformity check ($D_n$ = 0.0003)
empirical CDF
uniform CDF
F(t)
t
(c) Spacing regularity
ideal spacing
density
normalised nearest-neighbour gap
(d) Trained residual at collocation points
binned median
$\|r(t)\|_2$
$10^{-3}$
t