

# Wind and Weather Warning Product Specification

Edition 2.0.0 – January 2025

**IHO**



International  
Hydrographic  
Organization

Published by the  
International Hydrographic Organization  
4b quai Antoine 1<sup>er</sup>  
Principauté de Monaco  
Tel: (377) 93.10.81.00  
Fax: (377) 93.10.81.40  
[info@iho.int](mailto:info@iho.int)  
[www.iho.int](http://www.iho.int)

© Copyright International Hydrographic Organization 2025

This work is copyright. Apart from any use permitted in accordance with the Berne Convention for the Protection of Literary and Artistic Works (1886), and except in the circumstances described below, no part may be translated, reproduced by any process, adapted, communicated or commercially exploited without prior written permission from the International Hydrographic Organization (IHO). Copyright in some of the material in this publication may be owned by another party and permission for the translation and/or reproduction of that material must be obtained from the owner.

This document or partial material from this document may be translated, reproduced or distributed for general information, on no more than a cost recovery basis. Copies may not be sold or distributed for profit or gain without prior written agreement of the IHO Secretariat and any other copyright holders.

In the event that this document or partial material from this document is reproduced, translated or distributed under the terms described above, the following statements are to be included:

“Material from IHO publication [reference to extract: Title, Edition] is reproduced with the permission of the IHO Secretariat (Permission No ...../...) acting for the International Hydrographic Organization (IHO), which does not accept responsibility for the correctness of the material as reproduced: in case of doubt, the IHO’s authentic text shall prevail. The incorporation of material sourced from IHO shall not be construed as constituting an endorsement by IHO of this product.”

“This [document/publication] is a translation of IHO [document/publication] [name]. The IHO has not checked this translation and therefore takes no responsibility for its accuracy. In case of doubt the source version of [name] in [language] should be consulted.”

The IHO Logo or other identifiers shall not be used in any derived product without prior written permission from the IHO Secretariat.

## **Contents**

1	Overview.....	1
1.1	Introduction.....	1
1.2	Information.....	1
1.3	Scope.....	1
1.4	References.....	1
1.4.1	Normative.....	1
1.4.2	Normative references.....	1
1.4.3	Informative references.....	2
1.5	Terms, definitions and abbreviations.....	3
1.5.1	Use of language.....	3
1.5.2	Terms and definitions.....	4
1.6	References.....	4
1.6.1	Abbreviated terms.....	9
1.7	General Marine Weather Warnings Data Product Description.....	10
1.8	Data Product Specification metadata.....	11
1.9	Product Specification Maintenance.....	11
1.9.1	Introduction.....	11
1.9.2	New Edition.....	11
1.9.3	Revision.....	11
1.9.4	Clarification.....	12
1.9.5	Version Numbers.....	12
2	Specification Scope.....	12
3	Data Product Identification.....	12
4	Data Content and Structure.....	13
4.1	Introduction.....	13
4.2	Application Schema.....	13
4.3	Feature Catalogue.....	15
4.3.1	Introduction.....	15
4.3.2	Feature Types.....	15
4.3.3	Information Types.....	17
4.3.4	Feature Relationship.....	18
4.3.5	Attributes.....	18
4.3.6	Associations.....	20
4.3.7	Multiplicity Rules.....	21
4.3.8	Inheritance.....	21
4.3.9	Spatial Quality.....	21
4.3.10	Temporal Quality.....	21
4.4	Dataset Types.....	22
4.4.1	Introduction.....	22
4.4.2	Time.....	22
4.4.3	Multiple datasets.....	23
4.4.4	Units of Measurement.....	23
4.5	Geometry.....	23
4.5.1	S-100 Level 3a Geometry.....	23
4.5.2	Feature Types Summary.....	24
5	Coordinate Reference Systems (CRS).....	24
5.1	Introduction.....	24
5.2	Horizontal Coordinate Reference System.....	24
5.3	Vertical Coordinate Reference System.....	25
5.4	Temporal reference system.....	25
6	Data Quality.....	25
6.1	Completeness.....	25
6.2	Logical consistency.....	26
6.3	Positional accuracy.....	26
6.4	Temporal Quality.....	26
6.5	Thematic accuracy.....	27
7	Data Capture and Classification.....	27
7.1	Data Sources.....	27

7.2	Production Process.....	27
7.2.1	Metadata.....	27
7.2.2	Meteorological and Oceanographic Data.....	27
8	Data Maintenance.....	27
8.1	Dataset Maintenance and Update Frequency.....	28
8.2	Feature and Portrayal Catalogue Management.....	28
8.3	GML Encoding Management.....	28
9	Portrayal.....	28
9.1	Introduction.....	28
9.2	Polygon Features.....	28
9.2.1	Temporal Rules.....	29
9.2.2	Transparency Rules.....	29
9.2.3	Interoperability.....	29
9.2.4	Portrayal Catalogue.....	29
9.2.5	Lua vs XSLT Portrayal.....	29
10	Data Product Format (encoding).....	29
10.1	Introduction.....	29
10.2	Encoding of Latitude and Longitude.....	30
10.2.1	GML Latitude and Longitude.....	30
10.3	Text Attribute Values.....	30
10.4	Temporal Attribute Encoding.....	30
10.5	Mandatory Attribute Values.....	30
10.6	Missing or Unknown Attribute Values.....	30
10.7	Encoding Datasets Across 180° Longitude.....	30
10.8	Structure of Dataset Files.....	31
10.9	Data Scale.....	31
10.10	Message Filtering Along Routes.....	31
11	Data Product Delivery.....	31
11.1	Introduction.....	31
11.2	Exchange Set.....	31
11.2.1	Exchange Set Naming.....	31
11.3	Exchange Catalogue.....	32
11.3.1	Exchange Catalogue Naming.....	32
11.4	Mandatory Elements.....	32
11.5	Optional Elements.....	32
11.6	Dataset.....	32
11.6.1	Datasets.....	32
11.6.2	Dataset size.....	33
11.6.3	Dataset file naming.....	33
11.6.4	New Datasets and Cancellations.....	33
11.7	Support Files.....	33
11.7.1	Support File Naming.....	33
11.7.2	Support File Management.....	34
11.8	Data integrity and encryption.....	34
11.8.1	Weather Overlay Data Integrity Measures.....	34
11.8.2	Producer Identity and Authentication.....	34
11.8.3	Digital Signatures and Metadata.....	34
11.8.4	Data Encryption.....	34
11.8.5	Use of compression.....	34
11.8.6	Use of digital signatures.....	35
11.9	Dataset Loading and Unloading.....	35
12	Metadata.....	35
12.1	Introduction.....	35
12.2	Metadata for Datasets.....	37
12.2.1	S100_DatasetDiscoveryMetadata.....	38
12.2.2	S100_DataCoverage.....	44
12.2.3	S100_EncodingFormat.....	46
12.2.4	S100_SupportFileDiscoveryMetadata.....	46
12.2.5	S100_SupportFileFormat.....	49
12.2.6	S100_ExchangeCatalogue.....	49

12.3	language.....	53
12.3.1	fileIdentifier.....	53
12.3.2	language.....	53
12.3.3	characterSet.....	54
12.3.4	contact.....	54
12.3.5	dateStamp.....	56
12.3.6	identificationInfo.....	56
12.4	Language.....	59
12.5	Exchange Set metadata.....	59
12.6	S100_ExchangeCatalogue.....	61
12.6.1	S100_ExchangeCatalogueIdentifier.....	61
12.6.2	S100_CataloguePointOfContact.....	61
12.6.3	S100_NavigationPurpose.....	61
12.6.4	S100_DataCoverage.....	61
12.6.5	S100_Purpose.....	62
12.6.6	S100_EncodingFormat.....	62
12.6.7	S100_ProductSpecification.....	62
12.6.8	S100_ProtectionScheme.....	63
12.7	S100_CatalogueDiscoveryMetadata.....	63
12.7.1	S100_CatalogueScope.....	64
12.7.2	PT_Locale.....	64
12.8	Certificates and Digital Signatures.....	64
13	Dataset Encoding.....	64
13.1	Introduction.....	64
13.2	Dataset Rules.....	64
13.3	Data Coverage rules.....	65
14	Display Scale Range.....	65
15	Geometry.....	65
15.1	S-412 Geometry.....	65
16	List of annexes.....	66

## Document History

Changes to this Specification are coordinated by WMO/IOC Joint Technical Commission for Oceanography and Marine Meteorology (JCOMM). New editions will be made available via the IHO web site.

**Table — Document History**

Version Number	Date	Approved By	Purpose
0.0.1	13 August 2013	Julia Powell	Initial Draft.
0.0.2	2 December 2013	A. Schultz	Updated draft for review by ETMSS.
0.0.3	3 June 2015	Julia Powell	Updated to latest version of S-100.
0.0.4	25 September 2017	A. Phillips, G. Seroka	Added data product format information, including GML encoding, expanded sections on the feature model, definitions, references and application schema.
0.1.0	10 December 2018	A. Phillips	Updated multiple sections updated including new scope, DCEG and FC.
0.1.1	30 April 2025	A. Cervone-Richards, D. Spindler, S. Stevenson, S. Williamson	Updated multiple sections updated including new scope, DCEG and FC.
1.0.1	25 October 2025	IIC Technologies	Initial Population of document skeleton.
1.1.0	9 December 2025	IIC Technologies	Review and alignment of the PS with the Feature Catalogue.

# 1 Overview

## 1.1 Introduction

This document has been produced by the National Oceanic and Atmospheric Administration (NOAA) National Weather Service (NWS) Ocean Prediction Center (OPC) on behalf of the Joint World Meteorological Organization – Intergovernmental Oceanographic Commission (WMO-IOC) Technical Commission for Oceanography and Marine Meteorology (JCOMM), now WMO Commission for Weather, Climate, Hydrological, Marine, and Related Environmental Services and Applications (SERCOM), and the Worldwide Met-Ocean Information and Warning Service (WWMIWS) to define a data product that can be used as a Nautical Publication Information Overlay (NPIO) within electronic charting systems (ECS), including Electronic Chart Display and Information Systems (ECDIS). It has been developed within the framework specification defined by the International Hydrographic Organization (IHO) S-100 Universal Hydrographic Data Model and the International Standards Organization (ISO) 19100 series of standards. This product specification, S-412, is primarily intended for encoding maritime weather and wave warnings. These warnings include polygon portrayals of different hazardous weather conditions forecasted during the warning period to enhance situational awareness, route planning, and route monitoring.

## 1.2 Information

This product specification, S-412, is a vector graphic product specification that is primarily intended for encoding information on meteorological and oceanographic warnings that are used by mariners for route-planning, hazard avoidance, and risk mitigation. S-412 defines meteorological and oceanographic features, attributes and relationships, as well as their mapping to a dataset.

## 1.3 Scope

This document is maintained by the World Meteorological Organization (WMO) and describes an IHO S-100 compliant product specification for meteorological and oceanographic datasets, which will primarily act as an overlay for S-101 Electronic Navigational Charts on an S-100 based ECS, including ECDIS, in order to provide the maritime community with greater situational awareness. It specifies the content, structure, and metadata needed for creating a fully compliant Marine Weather Warnings dataset that will be compatible with an S-100 capable electronic navigation system. This product specification includes the content model, encoding guides, feature catalogue, portrayal catalogue, metadata, and example datasets.

In addition to acting as an overlay for S-101 Electronic Navigation Charts, this product specification outlines the capacity to interoperate with other S-100 compliant product specifications in accordance with the IHO S-98 Interoperability Specification.

This product specification does not include recommended changes to or requirements for services by National Meteorological Services.

## 1.4

## References

### 1.4.1 Normative

#### 1.4.2 Normative references

- GML OpenGIS®: *Geography Markup Language (GML) Encoding Standard* (Version 3.2.1).
- NOAA National Weather Service Glossary: <https://forecast.weather.gov/glossary.php>.
- National Weather Service Instruction 10-315: *Marine Weather Message*, 2020 Edition.
- National Weather Service Instruction 10-303: *Marine and Coastal Services Standards and Guidelines*, 2022 Edition.
- National Weather Service Instruction 10-604: *Tropical Cyclone Names and Definitions*, 2021 Edition.

- National Weather Service Instruction 10-811:: *Enroute Forecasts and Advisories*, 2022 Edition.
- National Weather Service Policy Directive 10-6:: *Tropical Cyclone Weather Services Program*, 2020 Edition.
- S-32:: *IHO Hydrographic Dictionary*, 2023 Edition.
- S-53:: *Joint IHO/IMO/WMO Manual on Maritime Safety Information (MSI)*, January 2016 Edition.
- S-98:: *Interoperability Specification*, 2022 Edition.
- S-100:: *IHO Universal Hydrographic Data Model*, 2024 Edition.\_
- S-101:: *IHO Electronic Navigation Chart Product Specification*, 2024 Edition.\_
- WMO 8:: *Guide to Meteorological Instruments and Methods of Observation*, 2023 Edition.
- WMO 182:: *International Meteorological Vocabulary*, 1992 Edition.
- WMO 306:: *Manual on Codes*, 2024 Edition.
- WMO 386:: *Manual on the Global Telecommunication System*, 2020 Edition.
- WMO 471:: *Guide to Marine Meteorological Services*, 2024 Edition.
- WMO 485:: *Manual on the Global Data-processing and Forecasting System*, 2023 Edition.
- WMO 558:: *Manual on Marine Meteorological Services*, 2024 Edition.
- WMO 702:: *Guide to Wave Analysis and Forecasting*, 2020 Edition.
- WMO/TD 850:: , 1998 Edition.
- Global Maritime Distress and Safety System, GMDSS (weather.gov).
- *IHO Geospatial Information Registry*.
- S-97:: *IHO Guidelines for Creating S-100 Product Specifications*, Edition 1.1.0, June 2020.
- S-100:: *IHO Universal Hydrographic Data Model*, Edition 5.2.0, June 2024.
- ISO 8601. 2004:: *Data elements and interchange formats – Information interchange – Representation of dates and times*. 2004.
- ISO 3166-1. 2020:: *Country Codes*. 2020.
- ISO 639-2/T. 1998:: *Language Codes*. 1998.
- ISO/TS 19103. 2024:: *Geographic information – Conceptual schema language*. 2024.
- ISO 19111. 2019:: *Geographic Information – Spatial referencing by coordinates*. 2019.
- ISO 19115. 2003:: *Geographic Information – Metadata*. 2003.
- ISO 19115-1. 2014:: *Geographic information — Metadata — Part 1: Fundamentals*. 2014.
- ISO 19115-2.2019:: *Geographic Information – Metadata – Part 2: Extension for imagery and gridded data*. 2019.
- ISO/TS 19123. 2005:: *Geographic information – Schema for coverage geometry and functions*. 2005.
- ISO/TS 19123-1. 2023:: *Geographic information – Schema for coverage geometry and functions. Part 1: Fundamentals*. 2023.
- ISO 19129. 2009:: *Geographic information – Imagery, gridded and coverage data framework*. 2009.
- ISO 19131. 2022:: *Geographic information – Data product specifications*. 2022.
- ISO 19136:2007:: *Geographic Information – Geographic Markup Language (GML)*. 2007.
- ISO 19136-1:2020:: *Geographic Information – Geographic Markup Language (GML). Part 1: Fundamentals*. 2020.
- ISO/IEC 19501. 2005:: *Information technology – Unified Modeling Language (UML) Version 1.4.2*. 2005

### 1.4.3 Informative references

- IMO A27/Res. 1051, IMO/WMO Worldwide Met-Ocean Information and Warning Service, 2011 Edition.
- ISO 19101:2002. *Geographic information – Reference model*. 2002.
- ISO 19101-1:2014. *Geographic information – Reference model. Part 1: Fundamentals*. 2014.
- ISO 19103: 2024. *Geographic information – Conceptual schema language – 2024*.



- ISO 19105: 2022. Geographic information – Conformance and testing. 2022.
- ISO 19107:2019. Geographic information – Spatial schema. 2019.
- ISO 19108:2002. Geographic information – Temporal schema. 2002.
- ISO 19109:2015. Geographic information – Rules for application schema. 2015.
- ISO 19110: 2016. Geographic information – Methodology for feature cataloguing. 2016.
- ISO 19113: 2005. Geographic information – Quality principles. 2005
- ISO 19116: 2019. Geographic information – Positioning services. 2019.
- ISO 19117:2012. Geographic information – Portrayal. 2012.
- ISO 19118: 2011. Geographic information – Encoding. 2011.
- ISO 19128:2005. Geographic information – Web Map Server interface. 2005.
- 19132: 2007. Geographic information – Location-based services – Reference model. 2007.
- ISO 19133:2005. Geographic information – Location-based services – Tracking and navigation. 2005.
- ISO 19138:2006. Geographic information – Data quality measures. 2006.
- ISO 19142:2010. Geographic information – Web Feature Service. 2010.
- ISO 19144-1:2009. Geographic information – Classification systems – Part 1: Classification system structure. 2009.
- ISO 19145:2013. Geographic information – Registry of representations of geographic point location. 2013.
- ISO 19153:2014. Geographic information – Geospatial Digital Rights Management Reference Model (GeoDRM RM) 1). 2014.
- ISO 19156:2023. Geographic information – Observations and measurements. 2011.
- ISO 19157:2023. Geographic information – Data quality. 2013.
- ISO/TS 19158:2012. Geographic information – Quality assurance of data supply. 2010.

ISO 19101 *Geographic Information – Reference Model*, 2003.

ISO 19103 *Geographic Information – Conceptual Schema Language*, 2005.

ISO 19103-2 *Geographic Information – Conceptual Schema Language – Part 2*, 2005.

ISO 19109 *Geographic Information – Rules for Application Schema*, 2005.

ISO 19110 *Geographic Information – Methodology for Feature Cataloguing*, 2005.

ISO 19111 *Geographic Information – Spatial Referencing by Coordinates*, 2007.

ISO 19115-1 *Geographic information — Metadata — Part 1: Fundamentals*—2014/Amd 1: 2018.

ISO 19115-3 *Geographic information — Metadata — Part 3: XML Schema implementation for fundamental concepts*—2016.

ISO 19117 *Geographic Information – Portrayal*, 2012.

ISO 19131 *Geographic Information – Data Product Specifications*, 2008.

ISO 19139-1 *Geographic information — XML schema implementation — Part 1: Encoding rules*—2019

## 1.5 Terms, definitions and abbreviations

### 1.5.1 Use of language

Within this document:

- “Must” indicates a mandatory requirement.
- “Should” indicates an optional requirement, that is the recommended process to be followed, but is not mandatory.
- “May” means “allowed to” or “could possibly” and is not mandatory.

## 1.5.2

### Terms and definitions

The S-100 framework is based on the ISO 19100 series of geographic standards. The terms and definitions provided here are used to standardise the relevant nomenclature found within that framework, whenever possible. Additional definitions specific to S-412 are provided in this section as well. Features, attributes and associations that may be realised in an S-412 compliant dataset are defined in Annex A, B and C.

## 1.6 References

**Abstract Class** An object class which cannot be instantiated, or is designated in an information model as not allowed to be instantiated [ISO 19107].

NOTE subclasses of an abstract class may be either abstract or non-abstract.

### Aggregation

*Special form of association that specifies a whole-part relationship between the aggregate (whole) and a component part (see composition) [ISO 19103].*

### Application

*Manipulation and processing of data in support of user requirements [ISO 19101-1:2014].*

### Application Schema

Conceptual schema for data required by one or more applications [ISO 19101].

### Association

Semantic relationship between two or more classifiers that specifies connections among their instances [ISO 19101].

NOTE A binary association is an association among exactly two classifiers (including the possibility of an association from a classifier to itself).

### Attribute

(1) Named property of an entity [ISO/IEC 2382-17:1999].

NOTE Describes a geometrical, topological, thematic, or other characteristic of an entity.

(2) *Feature within a classifier that describes a range of values that instances of the classifier may hold.*

NOTE *An attribute is semantically equivalent to a composition association; however, the intent and usage is normally different.*

NOTE *“Feature” used in this definition is the UML meaning of the term.*

### Boundary

*Set that represents the limit of an entity.*

NOTE *Boundary is most commonly used in the context of geometry, where the set is a collection of points or a collection of objects that represent those points.*

### Cartesian Coordinate System

Coordinate system which gives the position of points relative to n mutually perpendicular axes. [ISO 19111].

### Class

Description of a set of objects that share the same attributes, operations, methods, relationships, and semantics [ISO/TS 19103:2005].

NOTE a class represents a concept within the system being modelled. Depending on the kind of model, the concept may be real-world (for an analysis model), or it may also contain algorithmic and

computer implementation concepts (for a design model). A classifier is a generalisation of class that includes other class-like elements, such as data type, actor and component.

**Code List**

Value domain including a code for a permissible value [ISO 19136].

**Coordinate**

One of a sequence of  $n$  numbers designating the position of a **point** in N-dimensional space [ISO 19111].

NOTE In a **coordinate reference system**, the coordinate numbers are qualified by units [ISO 19107, ISO 19111].

**Coordinate Reference System**

A coordinate system that is related to the real world by a datum [ISO 19111].

NOTE for geodetic and vertical datums, it will be related to the Earth.

**Coverage**

Feature that acts as a function to return values from its range for any direction position within its spatial, temporal, or spatiotemporal domain [ISO 19123:2005].

Example: Examples include a raster image, polygon overlay, or digital elevation matrix type.

**Coverage Geometry**

Configuration of the domain of a coverage described in terms of coordinates [ISO 19123].

**Curve**

1-dimensional geometric primitive, representing the continuous image of a line [ISO 19107].

NOTE The boundary of a curve is the set of points at either end of the curve. If the curve is a cycle, the two ends are identical, and the curve (if topologically closed) is considered to not have a boundary. The first point is called the start point, and the last is the end point. Connectivity of the curve is guaranteed by the “continuous image of a line” clause. A topological theorem states that a continuous image of a connected set is connected.

**Data Product**

A dataset or dataset series that conforms to a data product specification [ISO 19131].

**Dataset**

Identifiable collection of data [ISO 19115].

NOTE A dataset may be a smaller grouping of data which, though limited by some constraint such as spatial extent or feature type, is located physically within a larger dataset. Theoretically, a dataset may be as small as a single feature or feature attribute contained within a larger dataset. A hardcopy map or chart may be considered a dataset.

**Data Quality**

*A set of elements describing aspects of quality, including a measure of quality, an evaluation procedure, a quality result, and a scope.*

**Data Type**

Specification of a value domain with operations allowed on values in this domain [ISO/TS 19103:2005].

Example: Integer, Real, Boolean, String, Date

NOTE *Data types include primitive predefined types and user-definable types.*

NOTE *A data type is identified by a term, for example Integer.*

**Datum**

*Parameter or set of parameters that define the position of the origin, the scale, and the orientation of a **coordinate** system.*

**ECDIS**

A navigation information system which with adequate back-up arrangements can be accepted as complying with the up-to-date chart required by regulations V/19 and V/27 of the 1974 SOLAS Convention, as amended, by displaying selected information from a System Electronic Navigational Chart (System Database) with positional information from navigation sensors to assist the Mariner in route planning and route monitoring, and if required display additional navigation-related information.

### **Direct Position**

Position described by a single set of coordinates within a coordinate reference system [ISO 19107].

### **Enumeration**

*A fixed list of valid identifiers of named literal values. Attributes of an enumerated type may only take values from this list.*

### **Feature**

Abstraction of real-world phenomena [ISO 19101:2003].

Example: The phenomenon truck may be classified with other similar phenomena into a feature type named automobile.

NOTE *A feature may occur as a type or an instance. Feature type or feature instance should be used when only one is meant.*

### **Feature Attribute**

Characteristic of a **feature** [ISO 19101].

NOTE A feature attribute type has a name, a data type, and a domain associated to it. A feature attribute instance has an attribute value taken from the value domain of the feature attribute type.

Example: A feature attribute named 'colour' may have an attribute value 'green' which belongs to the data type 'text'.

### **Feature Catalogue**

A catalogue containing definitions and descriptions of the **feature** types, **feature attributes** and occurring in one or more sets of geographic data [ISO 19110].

### **Feature Portrayal Function**

Function that maps a geographic feature to a symbol [ISO 19117:2012 (E), 4.10].

### **Function**

Rule that associates each element from a domain (source, or domain of the function) to a unique element in another domain (target, co-domain, or range) [ISO 19107].

NOTE The range is defined by another domain.

### **Geometric Object**

Spatial object representing a set of direction positions [ISO 19107].

NOTE *A geometric object consists of a geometric primitive, a collection of geometric primitives, or a geometric complex treated as a single entity. A geometric object may be the spatial characteristics of an object such as a feature or a significant part of a feature.*

### **Geometric Primitive**

*Geometric object representing a single, connected, homogeneous element of geometry.*

NOTE *Geometric primitives are non-decomposed objects that present information about geometric configuration. They include points, curves and surfaces.*

### **Generalisation**

Taxonomic relationship between a more general element and a more specific element [ISO 19103].

NOTE The more specific element is fully consistent with the more general element and contains additional information. An instance of the more specific element may be used where the more general element is allowed.

**Inheritance**

Mechanism by which more specific elements incorporate structure and behavior of more general elements related by behavior [ISO 19103].

**Map Projection**

Coordinate conversion from an ellipsoidal coordinate system to a plane [ISO 19111].

**Maritime Zone**

Zones recognized under international law include internal waters, the territorial sea, the contiguous zone, the exclusive economic zone (EEZ), the continental shelf, the high seas, and the Area [NOAA] Maritime Zones and Boundaries | National Oceanic and Atmospheric Administration (noaa.gov).

**Metadata** Data about data [ISO 19115:2005].

**METAREA**

METAREA is the acronym for METeorological AREA. It means a geographical sea area established for the purpose of co-ordinating the broadcast of marine meteorological information. The term METAREA followed by a roman numeral may be used to identify a particular sea area. [WMO List of METAREAS].

**Multiplicity**

Specification of the number of possible occurrences of a property, or the number of allowable elements that may participate in a given relationship [ISO 19103].

Examples: 1..\* (one to many); 1 (exactly one); 0..1 (zero or one).

**Numerical Model**

Computer simulations of the atmosphere and/or ocean that use an analysis of the current weather as a starting point to project the future state and provide the foundation of the weather forecasts. [Adapted from NOAA (<https://www.weather.gov/rah/virtualtourforecast>)].

**Object**

Entity with a well-defined boundary and identity that encapsulates state and behavior. Note: State is represented by attributes and relationships, behavior is represented by operations, methods, and state machines. An object is an instance of a class. [S-100].

**Point**

*0-dimensional geometric primitive, representing a position.*

NOTE *The boundary of a point is the empty set.*

**Portrayal**

Presentation of information to humans [ISO 19117].

NOTE within the scope of this International Standard portrayal is restricted to the portrayal of geographic information. [S-100].

**Portrayal Catalogue**

Collection of defined portrayals for a feature catalogue.

NOTE Content of a portrayal catalogue includes portrayal functions, symbols, and portrayal context [ISO 19117:2012 (E), 4.21].

**Portrayal Function**

Function that maps geographic features to symbols.

NOTE Portrayal functions can also include parameters and other computations that are not dependent on geographic feature properties. [ISO 19117:2012 (E), 4.23].

**Portrayal Rule**

Specific type of portrayal function expressed in a declarative language.

NOTE A declarative language is rule-based and includes decision and branching statements. [ISO 19117:2012 (E), 4.25].

**Range <Coverage>**

Set of values associated by a function with the elements of the spatiotemporal domain of a coverage. [ISO 19123].

**Realization**

Relationship between a specification and its implementation [ISO 19103].

**Record**

Finite, named collection of related items (objects or values) [ISO 19107].

NOTE Logically, a record is a set of pairs <name, item>.

**Register**

Set of files containing identifiers assigned to items with descriptions of the associated items [ISO 19135].

NOTE Descriptions may consist of many types of information, including names, definitions and codes.

**Register Manager**

Organization to which management of a register has been delegated by the register owner. [ISO 19135].

NOTE In the case of an IHO Register, the Register Manager performs the functions of the registration authority specified in the IHO Directives.

**Register Owner**

Organization that establishes a register [S-100].

**Registry**

Information system on which a register is maintained. [ISO 19135].

**Schema** Formal description of a model [S-100].

**Sea Surface**

A two-dimensional (in the horizontal plane) field representing the air-sea interface, with high frequency fluctuations such as wind waves and swell, but not astronomical tides, filtered out. [S-111].

Example: sea surface, river surface, and lake surface.

NOTE This implies marine water, lakes, waterways, navigation rivers, etc.

**Significant Wave Height**

The average trough-to-crest height of the highest one third of the wave heights (sea and swell) occurring in a particular time period [WMO Glossary].

**Spatial Reference**

Description of position in the real world [S-100].

**Start Point**

First point of a curve. [ISO 19107].

**Submitting Organization**

Organization authorized by a register owner to propose changes to the content of a register. [ISO 19135].

**Surface (Geometry)**

2-dimensional geometric primitive, representing the continuous image of a region of a plane [ISO 19107].

NOTE The boundary of a surface is the set of oriented, closed curves that delineate the limits of the surface.

**Symbol**

Portrayal primitive such as line styles, patterns, text and point symbol graphics defined in SVG. [S-100].

**Type**

Stereotype of class that is used to specify a domain of instances (objects) together with the operations applicable to the objects.

NOTE A type may have attributes and associations [S-100].

**Unit**

Defined quantity in which dimensioned parameters are expressed. [S-100].

**Value**

Element of a type domain [ISO/TS 19103:2005]. NOTE 1:: A value may be considered a possible state of an object within a class or type (domain).

NOTE 2 A data value is an instance of a data type, a value without identity.

**1.6.1 Abbreviated terms**

This Product Specification adopts the following convention for presentation purposes:

CRS	Coordinate Reference System
DCEG	Data Classification and Encoding Guide
ECDIS	Electronic Chart Display and Information System
ECS	Electronic Chart System (Non SOLAS)
ENC	Electronic Navigational Chart
EPSG	European Petroleum Survey Group
ET-MS	Expert Team on Maritime Safety
ETSI	Expert Team on Sea Ice
FCD	Feature Concept Dictionary
FDIS	Final Draft International Standard
GFM	General Feature Model
GI	Registry Geospatial Information Registry
GMDSS	Global Maritime Distress and Safety System
GML	Geography Markup Language
HDF5	Hierarchical Data Format (HDF5 is the fifth release)
ICC	International Color Consortium
IHO	International Hydrographic Organization
IMO	International Maritime Organization
IOC	Intergovernmental Oceanographic Commission
ISO	International Organization for Standardization
JCOMM	Joint Technical Commission for Oceanography and Marine Meteorology
METAREA	METeorological AREA
MSI	Maritime Safety Information
NetCDF	Network Common Data Form
OEM	Original Equipment Manufacturer
S-100WG	S-100 Working Group
SC-MMO	Standing Committee on Marine Meteorological and Oceanographic Services

SERCOM	Commission for Weather, Climate, Hydrological, Marine, and Related Environmental Services and Applications
SOLAS	International Convention for Safety of Life at Sea
SVG	Scalable Vector Graphics
UML	Unified Modeling Language
URI	Uniform Resource Identifier
URL	Universal Resource Locator
UTC	Coordinated Universal Time
UTF-8	Unicode Transformation Format-8
WMO	World Meteorological Organization
WWMIWS	Worldwide Met-Ocean Information and Warning Service
WXO	Weather Overlay
XLink	XML Linking Language
XMI	XML Metamodel Interchange
XML	Extensible Mark-up Language
XSD	World Wide Web Consortium XML Schema Definition
XSL	eXtensible Stylesheet Language

## 1.7 General Marine Weather Warnings Data Product Description

<b>Title</b>	S-412 Marine Weather Warnings
<b>Abstract</b>	This data product describes real-world weather and oceanographic warnings created from authoritative maritime weather analysis and forecast data products. These S-100-compliant weather warnings will be used by mariners for route-planning and hazard mitigation.
<b>Acronym</b>	S-412
<b>Content</b>	The Product Specification defines all requirements to which Marine Weather Warnings data products must conform. Specifically it defines the data product content in terms of features and attributes within the feature catalogue. The display of polygons is defined by the features and rule sets contained in the portrayal catalogue. The Data Classification and Encoding Guide (DCEG) provide guidance on how data product content must be captured.
<b>Spatial Extent</b>	<b>Description:</b> Maritime zones and terrestrial locations within proximity of navigable waters.
	<b>East Bounding Longitude:</b> 180°
	<b>West Bounding Longitude:</b> -180°
	<b>North Bounding Latitude:</b> 90°
	<b>South Bounding Latitude:</b> -90°
<b>Purpose</b>	<b>Navigation</b> The purpose of a Marine Weather Warnings dataset is to enhance the situational awareness and decision-making capacity of a mariner, as well as warn mariners of adverse, hazardous, dangerous, or extreme conditions that may pose a threat to life or property. An S-412 product can be used as an overlay for electronic navigational charts within shipboard or shore side navigation systems or as a standalone product within an appropriate geographic information system display.



## 1.8 Data Product Specification metadata

<b>Title</b>	S-412 Marine Weather Warnings Product Specification
<b>S-100 Version</b>	5.2.0
<b>S-412 Version</b>	1.1.0
<b>Date</b>	9 December 2025
<b>Language</b>	English ( <i>optional additional</i> )
<b>Classification</b>	Unclassified
<b>Contact</b>	World Meteorological Organization 7bis, avenue de la Paix Case postale 2300 CH -1211 Geneva 2 Switzerland Telephone: +41 (0) 22 730 84 03 Email: <a href="mailto:publications@wmo.int">publications@wmo.int</a>
<b>URL</b>	<a href="http://www.wmo.int">www.wmo.int</a>
<b>Identifier</b>	S-412
<b>Maintenance</b>	Changes to the Product Specification S-412 are coordinated by the JCOMM, and must be made available via the IHO web site. When a new version of the product spec is ready for approval it must follow through several bodies of the WMO; including: ET-MS and SC-MMO while keeping WWMIWS aware of changes for METAREAS. Once approved by the WMO, the WMO's Domain Control Body Member will submit the document to IHO for approval into the GI Registry.
<b>URL</b>	<a href="http://www.wmo.int">www.wmo.int</a>
<b>Identifier</b>	S-412

## 1.9 Product Specification Maintenance

### 1.9.1 Introduction

Changes to this product specification are coordinated by the WMO Commission for Weather, Climate, Hydrological, Marine, and Related Environmental Services and Applications (SERCOM), Standing Committee on Marine Meteorological and Oceanographic Services (SC-MMO), and WorldWide Met-ocean Information and Warning Service (WWMIWS). Changes to the Marine Weather Warnings will be released by the WWMIWS as a new edition, revision, or clarification. Requests for specific changes to this product specification should be coordinated through the most convenient National Meteorological Service or directly to WWMIWS.

### 1.9.2 New Edition

*New Editions* of S-412 introduce significant changes. *New Editions* enable new concepts, such as the ability to support new functions or applications, or the introduction of new constructs or data types. *New Editions* are likely to have a significant impact on either existing users or future users of S-412. All cumulative *revisions* and *clarifications* must be included with the release of approved New Editions.

### 1.9.3 Revision

*Revisions* are defined as substantive semantic changes to S-412. Typically, *revisions* will change S-412 to correct factual errors; introduce necessary changes that have become evident as a result of practical experience or changing circumstances. A *revision* must not be classified as a clarification. Revisions could have an impact on either existing users or future users of S-412. All cumulative *clarifications* must be included with the release of approved *revisions*.

Changes in a revision are minor and ensure backward compatibility with the previous versions within the same Edition. Newer revisions, for example, introduce new features and attributes. Within the same Edition, a dataset of one version could always be processed with a later version of the Feature and Portrayal Catalogues.

In most cases a new feature or portrayal catalogue will result in a *revision* of S-412.

#### 1.9.4 Clarification

*Clarifications* are non-substantive changes to S-412. Typically, *clarifications*: remove ambiguity; correct grammatical and spelling errors; amend or update cross references; insert improved graphics in spelling, punctuation and grammar. A *clarification* must not cause any substantive semantic change to S-412.

Changes in a *clarification* are minor and ensure backward compatibility with the previous versions within the same Edition. Within the same Edition, a dataset of one clarification version could always be processed with a later version of the Feature and Portrayal Catalogues, and a Portrayal Catalogue can always rely on earlier versions of the Feature Catalogue.

#### 1.9.5 Version Numbers

The associated version control numbering to identify changes (n) to S-412 must be as follows:

New Editions denoted as n.0.0

Revisions denoted as n.n.0

Clarifications denoted as n.n.n

## 2 Specification Scope

This product specification outlines the development of data from inception to the end user, through an authoritative weather forecasting agency. Requirements for data and metadata are provided. This document does not include product delivery mechanisms.

<b>Scope Identification</b>	Global
<b>Hierarchical Level</b>	006 — series
<b>Hierarchical Level Name</b>	Marine Weather Warnings Dataset
<b>Extent</b>	EX_GeographicExtent — Global coverage of maritime areas. EX_TemporalExtent — Not defined for this product specification. EX_VerticalExtent -Not defined for this product specification.

## 3 Data Product Identification

A dataset that conforms to this Product Specification may be identified by its discovery metadata as defined in clause 12.

<b>Title</b>	Marine Weather Warnings
<b>Abstract</b>	S-412 datasets must be produced in accordance with the rules defined in this S-412 Product Specification. The S-412 Product Specification contains all the information necessary to enable meteorological organisations to produce a consistent overlay, and manufacturers to use that data efficiently in an electronic navigation systems. Compliant datasets of Marine Weather Warnings contain polygons of hazardous meteorological and oceanographic conditions. Datasets are produced by an authoritative weather forecasting agency for a particular geographic region and set of times, and may include accompanying metadata describing the content, variables, applicable times, locations, and structure of the data product. Data used to create the polygons may be derived from observed, mathematically-predicted, or model-driven phenomena.

<b>Topic Category</b>	Climatology, Meteorology, Atmosphere (ISO 19115 Domain Code 004)—Oceans (ISO 19115 Domain Code 014)
<b>Geographic Description</b>	The geographic boundaries of warning polygons are determined by meteorological events for a given time period; however, the warnings are only provided over maritime regions.
<b>Spatial Resolution</b>	The spatial resolution varies by weather forecasting agency and is largely determined by their forecasting and analysis domain and file size of each data file. Each Data Coverage feature of an <i>WEATHER</i> dataset must indicate a value for an optimum viewing scale. Recommended values for scales can be found in the S-101 ENC Product Specification. Producers should note that at the smaller scales, geographic details will have no perceptible visual separation on a graphic display, and are therefore encouraged to determine display scales taking into account the content and intended navigation purpose of the dataset.
<b>Purpose</b>	Navigation in all regions. The Marine Weather Warnings dataset is primarily intended to be used in electronic navigation systems as an overlay to an ENC.
<b>Language</b>	English (Mandatory), other (Optional)
<b>Classification</b>	Data may be classified as one of the following: <ol style="list-style-type: none"> <li>1) Unclassified;</li> <li>2) Restricted;</li> <li>3) Confidential;</li> <li>4) Secret;</li> <li>5) Top Secret;</li> <li>6) Sensitive but Unclassified;</li> <li>7) For official Use Only;</li> <li>8) Protected;</li> <li>9) Limited Distribution.</li> </ol>
<b>Spatial Representation Type</b>	Vector
<b>Point of Contact</b>	Producing Agency
<b>Use Limitation</b>	Must be used with an ENC. An S-412 dataset is not intended to be used for land-based or aviation weather forecasting purposes.

## 4 Data Content and Structure

### 4.1 Introduction

This section describes the application schema, which is described in Unified Modelling Language (UML):

- Feature Catalogue;
- Dataset types;
- Geometry.

The Marine Weather Warnings Overlay is a feature-based vector product that contains meteorological and oceanographic datasets. The content information is described in terms of a General Feature Model and a Feature Catalogue.

### 4.2 Application Schema

S-412 conforms to the General Feature Model (GFM) outlined in S-100 Part 3 and is realised in Figure 1. The GFM is the conceptual model for feature and information types.

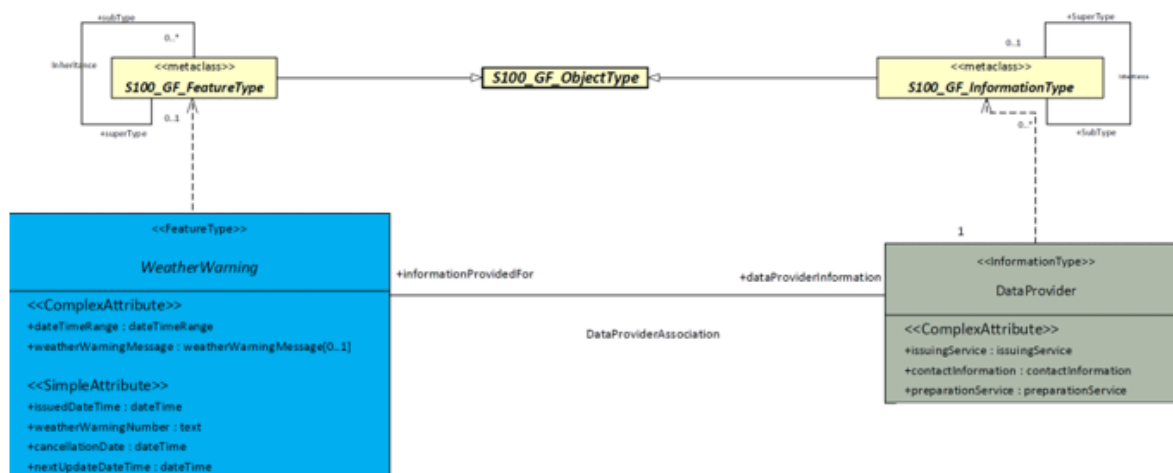


Figure 1 - S-412 realisation of the S-100 GFM

The complete application schema is expressed in UML and is provided in Annex A.

#### Figure 4-1 — S-412 General Feature Model

The complete application schema is expressed in UML and is provided in Annex A.

The data model consists of seven classes, where six are feature types:

- **WeatherWarning;**
- **ThunderstormWarning;**
- **WindWarning;**
- **IceAccretionWarning;**
- **SignificantWaveHeightWarning;**
- **RestrictedVisibilityWarning.**

and one is an Information Type:

- **DataProvider.**

These feature types are derived from the S-100\_GF\_FeatureType metaclass. Feature and Information Type descriptions can be found in Annex A.

S-412 conforms to the General Feature Model (GFM) from S-100 Part 3. This section describes the Application Schema as expressed in the UML diagrams included. This document contains an overview of the S-412 application schema. The S-412 Application Schema types are then realised in the Feature Catalogue. The Feature Catalogue can be found in the WMO Domain of the IHO Registry, and provides a full specification of all types including feature and information types, their attributes, allowed values, and the relationships between types in the data product.

The following conventions are used in the UML diagrams depicting the application schema:

- Standard UML conventions for classes, associations, inheritance, roles, and multiplicities apply. These conventions are described in Part 1 of S-100.
- Italic font for a class name indicates an Abstract Class.
- Abstract Feature Classes are depicted with a blue background.
- Ordinary (non-abstract) feature classes are depicted with a green background.
- Information type classes are depicted with a grey background. There are no abstract information type classes in S-412.
- Association Classes are depicted with a white background. There are no association classes in S-412+.
- Complex attributes are depicted with a salmon background.

- Enumeration lists are depicted with a brown background. The numeric code corresponding to each listed value is shown to its right following an '=' sign.
- No significance is attached to the colour of associations. (Complex diagrams may use different colours to distinguish associations that cross one another.).
- Where the association role or name is not explicitly shown, the default rules for the roles and names apply:
  - The role name is 'the<CLASSNAME>' where <CLASSNAME> is the name of the class to which that association end is linked.
  - The association name is '<CLASSNAME1>\_<CLASSNAME2>' where <CLASSNAME1> is the source and <CLASSNAME2> the target. In the case of a feature/information association, the feature is the source. For feature/feature or information/information associations without explicit names, the source/target are indicated by an arrowhead.
- Subclasses inherit the attributes and associations of their superclasses at all levels, unless such inheritance is explicitly overridden in the subclass.

Types for simple attributes are listed on the right hand side in the UML diagrams, e.g **issueDate** has the S-100 type **dateTime**. In order to simplify the appearance of the diagrams, no types are stated for complex attributes or enumerations.

## 4.3 Feature Catalogue

### 4.3.1 Introduction

The S-412 Feature Catalogue describes real-world meteorological and oceanographic concepts in one or more sets of geographic data as Feature Types, Information Types, Attributes, Attribute Values, Associations and Roles. These are bound together in the .XML Feature Catalogue.

Definitions of each feature type, information type, attribute, including enumerated value definitions, and Associations are also provided in the Data Classification and Encoding Guide (Annex A) and represent concepts that may be encoded in an S-412 dataset. These definitions are drawn from the Feature Concept Dictionary managed by the IHO in the IHO Geospatial Information Registry .

### 4.3.2 Feature Types

Feature types are the basic level of classification in the Feature Catalogue, and are used in S-412 to represent warnings of atmospheric and oceanographic phenomena.

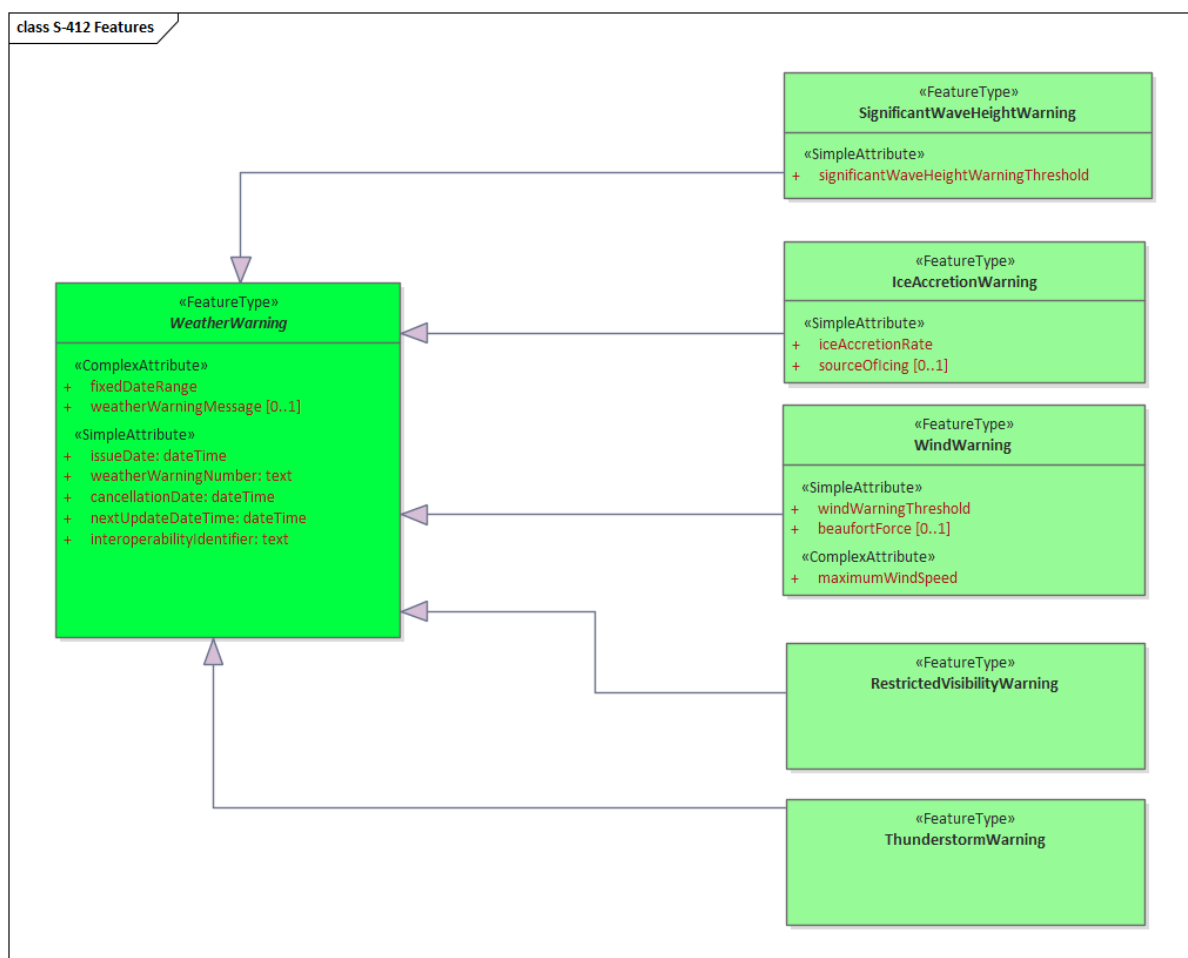


Figure 4-2 — S-412 Features

As can be seen in the diagram, a single Abstract Feature **WeatherWarning** is used as a template from which the concrete features of S-412 are derived.

#### 4.3.2.1

##### Meta Features

Meta Features contain information about other features within a data set. Information defined by Meta Features may also override default metadata values defined by the dataset descriptive records. S-412 does not make use of any Meta Features

#### 4.3.2.2 Geographic Features

Geographic (geo) feature types form the principal content in S-412 and are defined by their associated attributes and Information Types.

Feature types may be associated to other feature types or to Information Types.

As an example, the realisation of a Wind Warning concept is provided by the UML diagram below. The diagram shows the Wind Warning feature's inheritance from the abstract Weather Warning feature and its connection to various complex and simple attributes. The `windWarningThreshold` attribute is used to determine the category and portrayal colour of Wind Warning polygons based on wind speeds. The optional `beaufortForce` attribute is used to indicate more specific wind speed bins that the feature represents, based on the international Beaufort Wind Scale. The `dateTimeRange` attribute provides the start and end times that are valid for the Wind Warning. The `weatherWarningNumber` attribute provides an identification number to track warnings issued with each new dataset. The optional `weatherWarningMessage` attribute provides a short message with added context or information about a Weather Warning.

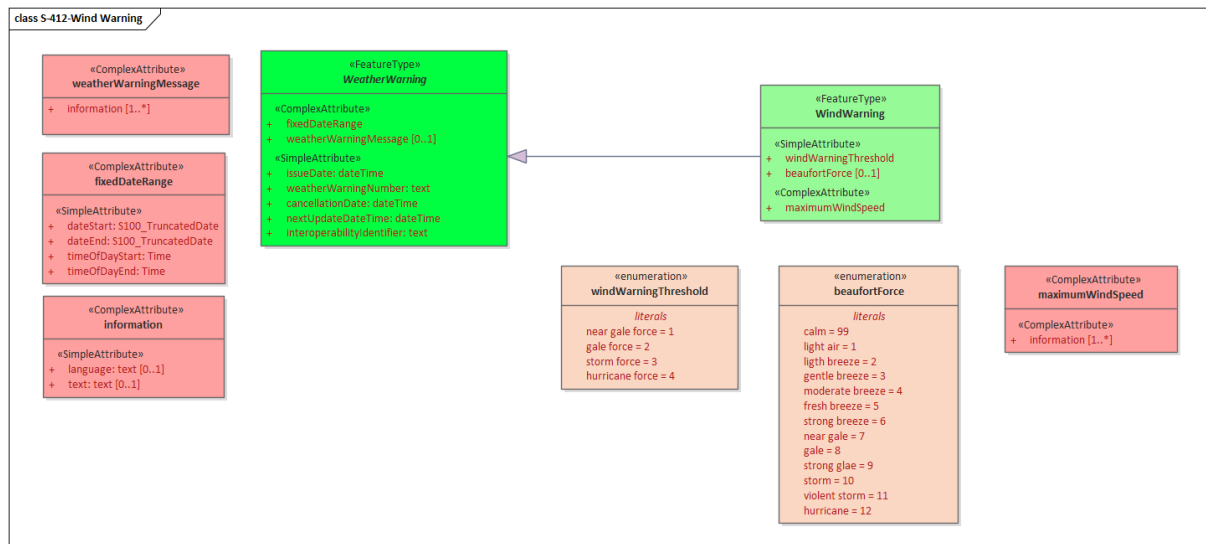


Figure 4-3 — Wind Warning Feature

#### 4.3.3 Information Types

Information Types define identifiable pieces of information in a dataset that can be shared between other features or information types. Information Types have attributes but have no relationship to any geometry; Information Types may also reference other information types if defined in the Feature Catalogue.

Figure 3 shows the realisation of the single Information Type used in S-412: **DataProvider**.

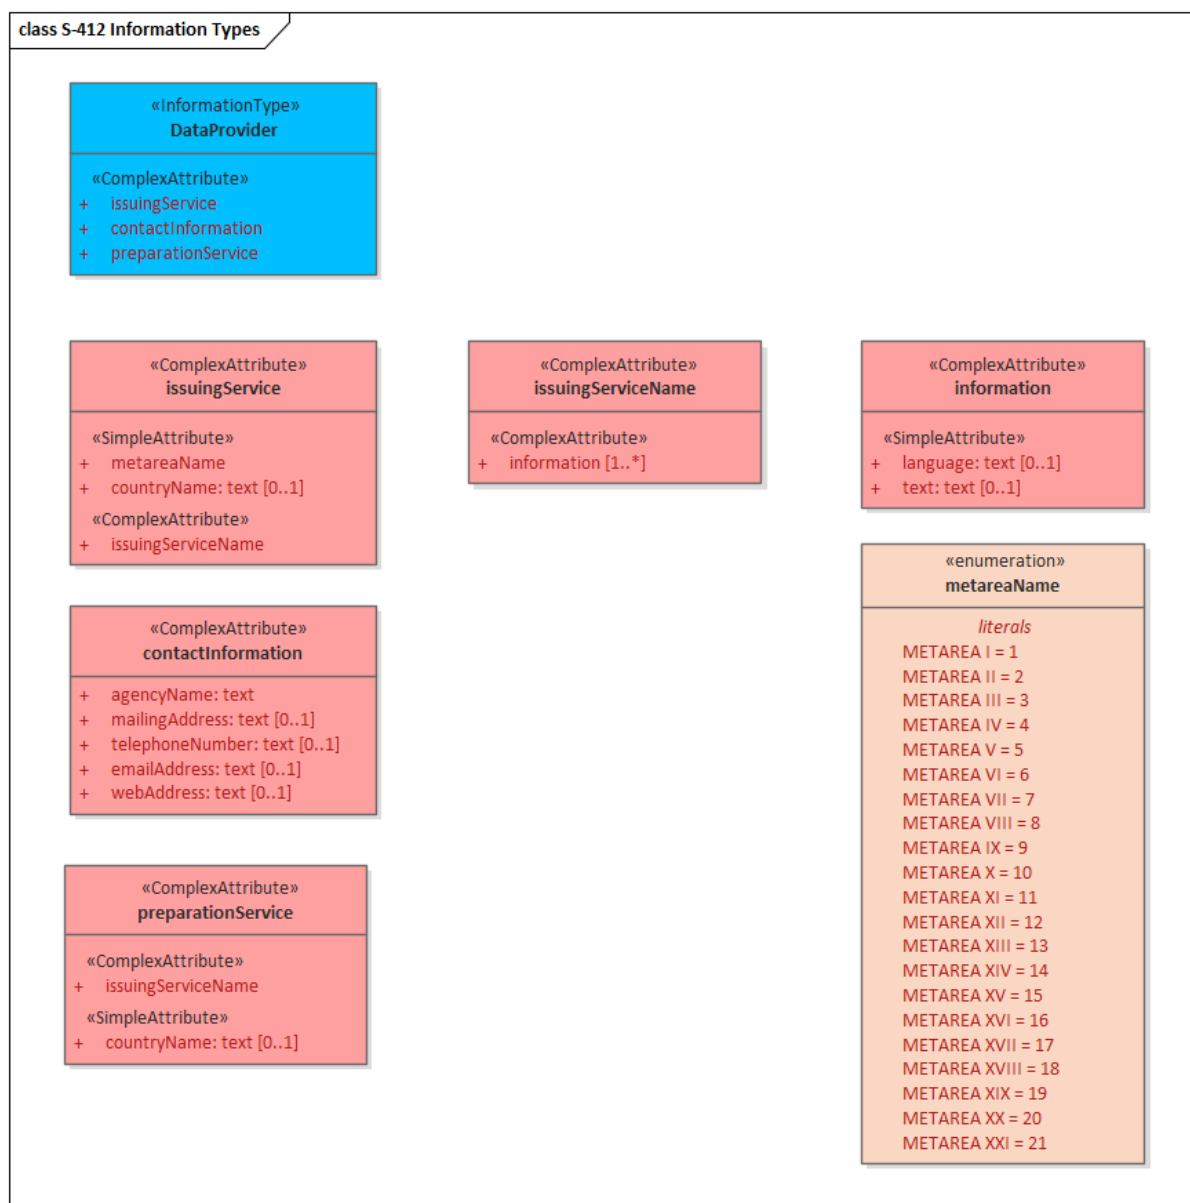


Figure 4-4 — Data Provider Information Type

#### 4.3.4 Feature Relationship

A feature relationship links one or more instances of one feature type with one or more instances of the same or a different feature type. There are three common types of feature relationships: Association, Aggregation, and Composition. S-412 does not make use of any feature relationships.

Associations are described in more detail in [Clause 4.3.6](#).

#### 4.3.5 Attributes

Attributes define the characteristics of a Feature or Information Type. Attribute Types can be either complex or simple. Simple attributes carry the value itself, and complex attributes are aggregations of other simple and/or complex attributes that create a hierarchical data structure to describe a feature. An attribute instance belongs to one and only one Feature or Information Type.

##### 4.3.5.1

##### Simple attributes

The following table lists the types of simple attributes used in S-412.




**Table 4-1**

Type	Definition
enumeration	List of predetermined values that can be expanded and contracted.
real	A floating point number.
integer	Numeric value with defined range, units and format.
text	A sequence of characters.
dateTime	Character encoding shall follow the format for date and time as specified in ISO 8601. Example: 19850412T101530.
boolean	True or False.
URN	Uniform Resource Name.

Simple attributes for the Wind Warning feature type are shown in [Figure 4-3](#) and the DataProvider Information Type in [Figure 4-4](#). Each S-100 attribute type is listed next to their camel case encoding value. Enumerated attributes are referenced by their defined data type and values are listed.

Enumerated attributes defined for S-412, represented in UML are shown in [Figure 4-5](#). The complete list of all attributes and their properties approved for use in S-412 are also provided in Annex A.

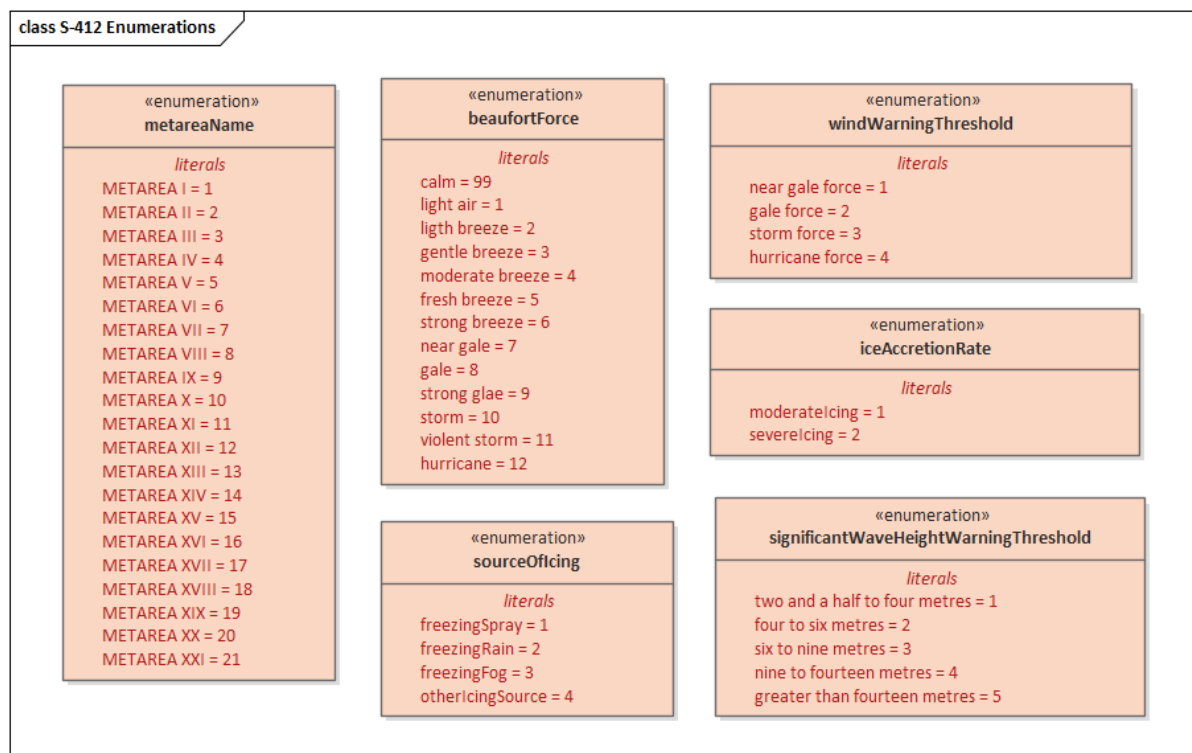**Figure 4-5 — S-412 Enumerated Attributes**

#### 4.3.5.2 Code Lists

Within S-100, Codelist types may be used for open enumerations whose membership cannot be known at the level of the product specification, for reuse of information model fragments, or for more efficient catalogue management.

Codelist Types are not utilised in this version of S-412.

### 4.3.5.3 Complex Attributes

Complex attributes are aggregations of other attributes that are either simple or complex. The aggregation is defined by means of attribute bindings. The diagram below shows the complex attributes defined in S-412. By way of example, **dateTimeRange** is utilised by the Wind Warning feature type shown in [Figure 4-3](#). This attribute is an aggregation of 2 simple Time attributes and 2 simple S100\_TruncatedDate attributes. In the diagram, attributes with no type defined are either enumerations or complex attributes. Complex attributes are aggregations of other attributes that are either simple or complex. The aggregation is defined by means of attribute bindings. The diagram below shows the complex attributes defined in S-412. By way of example, **dateTimeRange** is utilised by the Wind Warning feature type shown in [Figure 4-3](#). This attribute is an aggregation of 2 simple Time attributes and 2 simple S100\_TruncatedDate attributes. In the diagram, attributes with no type defined are either enumerations or complex attributes.

A full list of complex attributes approved for use in an S-412 dataset are defined in Annex A.


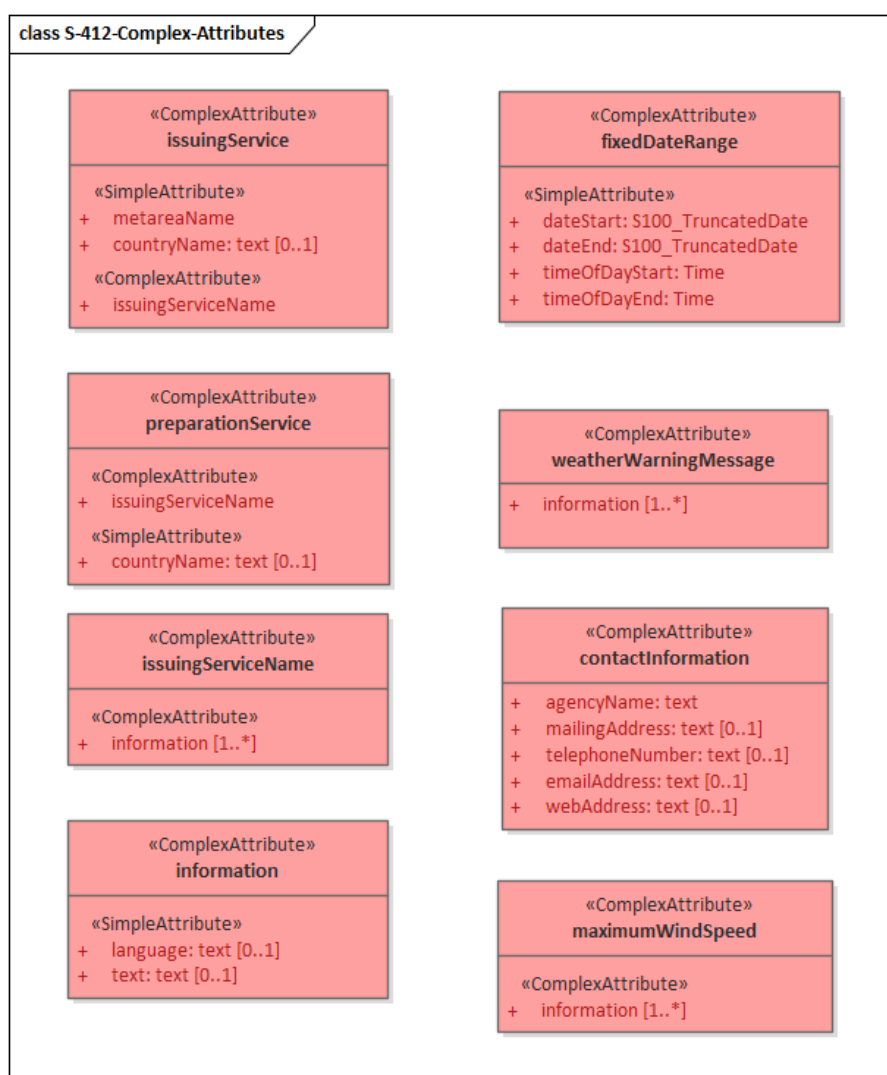


Figure 4-6 — S-412 Complex Attributes

### 4.3.6 Associations

Associations are used to describe a relationship between instances of one feature or information type with instances of the same or a different feature or information type. Unless otherwise noted, associations are bi-directional in S-412. If an association is unidirectional, source and target roles are defined.

The diagram below shows an example of the association between the WeatherWarning feature type and the DataProvider information type called DataProviderAssociation. The real world relationship between these concepts is that a weather warning has additional information about the service(s) issuing the warning.

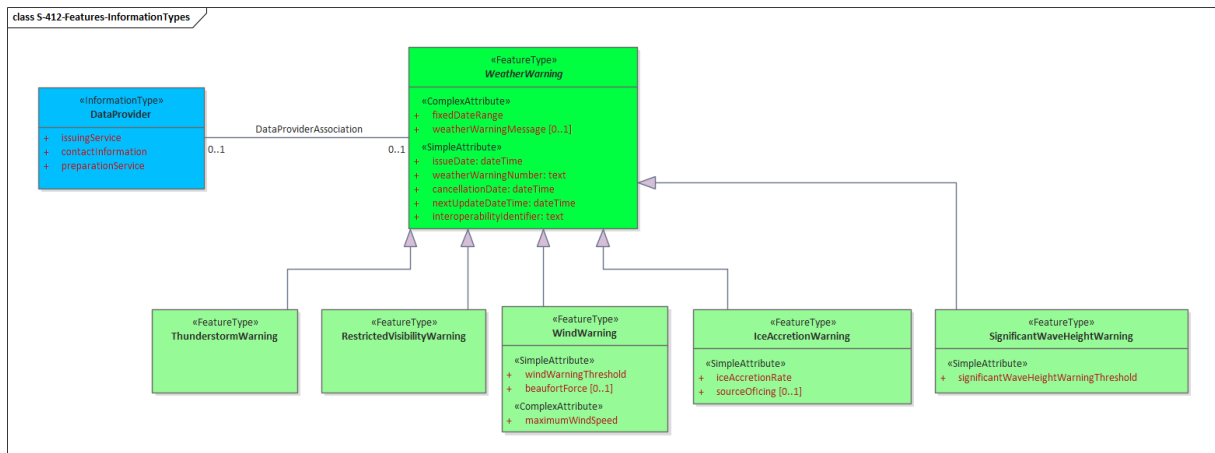

**Figure 4-7 — S-412 Data Provider Association**

the diagram shows the real world relationship between a weather warning and its supplemental information for where it came from. A complete list of associations and roles used in S-412 can be found in Annex A.

#### 4.3.6.1 Camel Case Rules

All names in S-412 are unique in order to distinguish one from another. Further, camel case rules are applied in order to distinguish encoding values. Each class, package, type-specification and association name are concatenated and start with an uppercase letter with each subsequent word starting with a capital letter. Attribute and association role names are concatenated and start with a lower-case letter; subsequent words start with a capital letter.

Example: The Wind Warning feature type is encoded as WindWarning. The Date Time Range complex attribute type is encoded as dateTimeRange.

#### 4.3.7 Multiplicity Rules

In UML, all attributes are mandatory by default. Multiplicity rules are used for attributes and association role names to provide a way of describing optional and conditional attributes. In these rules, the first number represents the minimum number of instances that may exist; the second number represents the maximum number of instances that may exist. For example, 0..\* means many, optional, zero or more; 1..\* means at least one. So, in the UML diagrams unless an attribute (complex or simple) has a specific multiplicity shown it can be assumed to be mandatory.

#### 4.3.8 Inheritance

A hierarchical structure among S-412 feature types and Information Types exists in order to group similar concepts by definition, use cases or attribute sets. The base level of the hierarchy is commonly called the Super-type and represents a generic concept. More specific concepts are the next level in the hierarchy and these are called Sub-types. All Sub-types inherit the properties of the Super-type within the same hierarchical structure unless otherwise specified. Within S-412, inheritance creates flexibility for a data producer to utilise the appropriate feature based on their user's needs.

In the WindWarning feature shown in [Figure 4-3](#), WindWarning inherits all attributes and associations from the WeatherWarning abstract feature type.

#### 4.3.9 Spatial Quality

Spatial quality attributes are commonly carried by S-100 based product specifications in an information class called Spatial Quality and describe the positional quality of an object. Because S-412 datasets are assumed to be composed of the highest quality position data available at the time of issuance, Spatial Quality is not utilised in S-412 Product Specification.

#### 4.3.10 Temporal Quality

There is a direct relationship between temporal quality and spatial quality with S-412 datasets. Because S-412 datasets are assumed to be composed of the highest quality position data available at the time of

issuance, it is necessary to ensure the temporal quality of the dataset. Temporal quality ensures spatial quality.

Various time attributes are carried by various features to ensure the end user is aware of when the dataset is published as well as when the data is valid. Together, these attributes in the data ensure the user is aware of the temporal quality of the data.

Additionally, other time attributes are included to validate time across a dataset. For example, the `issuedDateTime` carried by Weather Warning is also carried by Wind Warning. If these two attributes are not the same, the dataset should not validate. Each category of Weather Warnings (Wind, Significant Wave Height, Thunderstorm, etc) also has `dateTimeRange` attributes showing the start and end times for the warning periods. These measures are included to ensure the most current and spatially accurate datasets are available to the end user. Further information on these validation measures can be found in Annex F. Additional time attributes such as `cancellationDate` and `nextUpdateDateTime` are discussed in section 4.4.2.

## 4.4

### Dataset Types

#### 4.4.1 Introduction

A dataset is a grouping of features, attributes, geometry, and metadata which comprises a specific geographic coverage. Only one type of S-412 dataset is supported: 1) GML encoding for surface geometric primitive feature collections.


#### 4.4.2 Time

S-412 datasets can represent real-world phenomena in the present or future. Because of the unique nature of atmospheric and oceanographic concepts and their geographical changes in time, a variety of time attributes are included in S-412 to ensure instances of features are attributed correctly through time. Features or information types outside of the temporal range of a dataset shall not be included in a dataset. Time shall always be provided in Coordinated Universal Time (UTC).

The `dateTimeRange` is a complex attribute consisting of simple attributes, `dateTimeStart` and `dateTimeEnd`, to allow certain features to define a specific temporal range. The `dateTimeRange` attribute is mandatory for each feature. This attribute provides data producers the flexibility to manage the temporal resolution of their datasets at the feature level and to concatenate data files in a manner which best suits their workflow and customer's needs. In order for features to be portrayed, the user's system must clearly indicate the `dateTimeRange` of a feature or a group of features if the values are the same. Instances of this attribute may be used for data validation and to ensure temporal quality.

Three other simple `dateTime` attributes (`issuedDateTime`, `nextUpdateDateTime`, and `cancellationDate`) are mandatory for each `WeatherWarning` and inherited into the sub-feature types. The `issuedDateTime` attribute provides a timestamp for when the `WeatherWarning` has been issued. The `nextUpdateDateTime` attribute provides the time information for the next expected `WeatherWarning` to be issued. The `cancellationDate` {is used to mark when a `WeatherWarning` is set to expire, or be cancelled}.

Every time attribute is associated with the abstract `WeatherWarning` feature type. These attributes are then inherited by all sub-types of `WeatherWarning` (`windWarning`, `significantWaveHeightWarning`, `iceAccretionWarning`, `restrictedVisibilityWarning`, and `thunderstormWarning`). This is shown in [Figure 4-8](#).

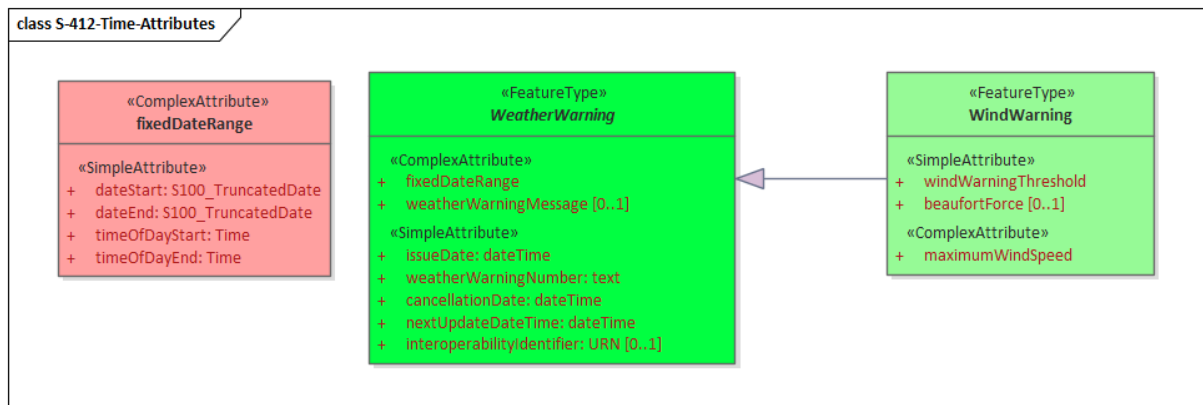

**Figure 4-8 — S-412 weatherWarning Time Attributes**

#### 4.4.3 Multiple datasets

In order to facilitate the efficient processing and exchange of S-412 data, S-412 data files will be split by the time and date in which the file's data is valid.

#### 4.4.4 Units of Measurement

Weather Warnings represent different types of phenomena, and thresholds categorize the severity of the warnings. Enumerated attributes are used to describe the thresholds for many weatherWarning sub-types including; windWarning, significantWaveHeightWarning, and iceAccretionWarning. For restrictedVisibility and thunderstormWarning feature types, units are determined at the feature level. More information about the units in each category are located in the definitions of each feature.

### 4.5 Geometry

S-412 supports simple geometry that can be expressed in multiple configurations as described in ISO 19107:2003 clause 6.1.3. Only surface geometries represent S-412 features.

#### 4.5.1 S-100 Level 3a Geometry

The underlying geometry of an S-412 dataset is constrained to level 3a which supports 0, 1 and 2 geometric dimensional objects (points, curves and surfaces) as defined by S-100 Part 7 – Spatial Schema. This product specification uses only one type of geometry: GM\_Polygon (GM\_Surface).

Level 3a is described by the following constraints:

- Each curve must reference a start and end point (they may be the same).
- Curves must not self-intersect. See [Figure 4-9](#)
- Areas are represented by a closed loop of curves beginning and ending at a common point.
- In the case of areas with holes, all internal boundaries must be completely contained within the external boundary and the internal boundaries must not intersect each other or the external boundary. Internal boundaries may touch tangentially (i.e. at one point). See Figure 9.
- The outer boundary of a surface must be in a clockwise direction (surface to the right of the curve) and the curve orientation positive. The inner boundary of a surface must be in a counter-clockwise direction (surface to the right of the curve) and the curve orientation negative. See Figure 9.

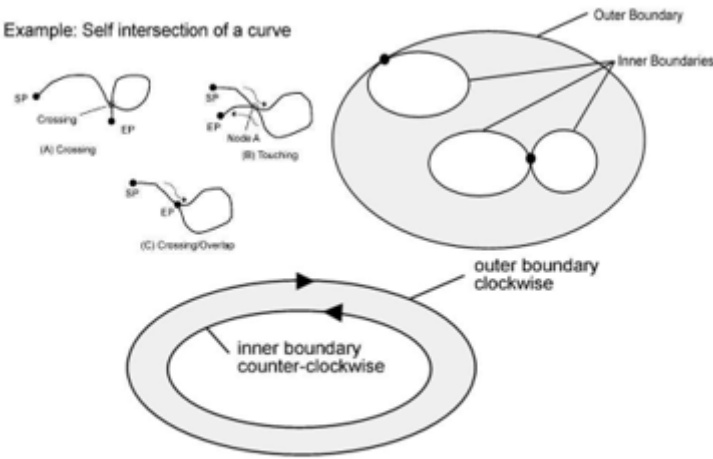


Figure 9. Level 3a geometric rules.

Figure 4-9 — Level3a Geometric Rules

S-412 further constraints Level 3a with the following: \* Coincident linear geometry must be avoided when there is a dependency between features. \* Curve interpolation may be utilised to represent a variety of curve types. Curve interpolation may also be utilised for inner and outer boundaries for polygons. \* Curves, including interpolations, and areas should avoid crossing the 180° longitude.

Examples illustrating the variety of ways geometry may be represented in an S-412 GML data file are provided in Annex E.

4.5.2

Feature Types Summary

- 1) Summary of implemented features

Table 4-2

Index	Alias	Name
Feature	Weather Warning	Weather Warning

5 Coordinate Reference Systems (CRS)

5.1 Introduction

When describing geographic information, it is common practice to separate the horizontal and vertical part of a position. This leads to 2D Coordinate Reference Systems for the horizontal positions and 1D Coordinate Reference Systems for the vertical positions.

5.2 Horizontal Coordinate Reference System

The horizontal coordinate reference system used for this product specification must be the World Geodetic System 1984 (WGS84) — (EPSG:4326) which is defined by the European Petroleum Survey Group (EPSG) code 4326. The longitude is stored as a negative number to represent a position west of the prime Meridian. Latitude is stored as a negative number to represent a position south of the Equator.

Horizontal Coordinate Reference System      EPSG:4326 (WGS84)

Projection      NONE

Temporal reference system      Gregorian Calendar

<b>Coordinate Reference System registry</b>	<a href="#">EPSG Geodetic Parameter Dataset</a>
<b>Date type (according to <a href="#">[iso-19115-1]</a>)</b>	002 — publication
<b>Responsible party</b>	International Association of Oil and Gas Producers (IOGP)
<b>URL</b>	<a href="http://www.iogp.org/">http://www.iogp.org/</a>

### 5.3 Vertical Coordinate Reference System

This product specification does not apply to meteorological or oceanographic features at multiple vertical levels. All Weather Warning polygons are developed as overlays within ECS and thus are valid at the vertical datum defined by the ENC.

*In this product there are no direct vertical coordinates which require the use of a vertical coordinate reference system.*

### 5.4 Temporal reference system

The Marine Weather Warnings Product Specification applies to meteorological features valid at specific times. The temporal reference system used is the Gregorian calendar for date and UTC for time. Time is measured by reference to Calendar dates and Clock time in accordance with ISO 19108:2002 Temporal Schema clause 5.4.4. Times must be in UTC and follow the following 25-character format: `yyyymmddThhmmss`.

*The temporal reference system is the Gregorian calendar for date and UTC for time. Time is measured by reference to Calendar dates and Clock time in accordance with [clause=5.4.4](#). A date-time variable will have the following 16-character format: `__yyyymmddThhmmssZ__`.*

## 6 Data Quality

Datasets conforming to S-412 should always be created with the best available source information. Weather service providers recognized by the WMO shall be the distributor of datasets for each respective METAREA. All Marine Weather Warning information covering winds, waves, ice accretion, thunderstorms, and restricted visibility should be complete and in compliance with this Product Specification. The quality of the information can be verified with the text provided in the GMDSS.

Marine Weather Warning information is assumed to be of high quality and guaranteed by the processes employed by data providers. Quality of S-412 products depends on the combined quality of many inputs including observed, mathematically-predicted, or model-driven weather data. S-412 products must be validated with the S-412 specific validation checks prior to release by the data producer. The data producer must review the check results and address any issues to ensure sufficient quality of the data products. The checks are a mixture of data format validation, conformance to standards, completeness and logical consistency. These validation checks are listed in [Annex F](#).

### 6.1

#### Completeness

Completeness is defined as the presence and absence of features, their attributes and relationships. It consists of two data quality elements:

- Commission: excess data present in a dataset;
- Omission: data absent from a dataset.



## 6.2 Logical consistency

Logical Consistency is defined as the degree of adherence to logical rules of data structure, attribution and relationships (data structure can be conceptual, logical or physical). A series of logical consistency checks for S-412 can be found in Annex F — Validation Checks. It consists of four data quality elements:

- Conceptual consistency: adherence to rules of the conceptual schema;
- Domain consistency: adherence of values to the value domains;
- Format consistency: degree to which data is stored in accordance with the physical structure of the dataset;
- Topological consistency: correctness of the explicitly encoded topological characteristics of a dataset.

## 6.3 Positional accuracy

The forecasting process is a combination of using observation data (vessel, buoy, or station reports, remotely sensed data from scatterometers, altimeters, satellite imagery, etc) alongside various weather and wave computer model datasets. These models rely on atmospheric and oceanographic physics and mathematics to predict future conditions. A forecaster uses observations and model data to analyse and predict the conditions for a geographic area. The positional accuracy of features will vary depending on the forecaster's confidence in the correlation of these models and the conditions reported in observations.

The quality of each model will depend on the quality, timeliness, and spatial coverage of the input data (observations), as well as the mathematical and physical techniques of the model. These can be found in model technical reports.

Positional Accuracy is defined as the accuracy of the position of features within a spatial reference system. It consists of three data quality elements:

- Absolute or external accuracy: closeness of reported coordinate values to values accepted as or being true;
- Relative or internal accuracy: closeness of the relative positions of features in a dataset to their respective relative positions accepted as or being true;
- Gridded data positional accuracy: closeness of gridded data spatial position values to values accepted as or being true.

## 6.4 Temporal Quality

The S-412 datasets consist of predicted and forecasted data. Because such, data quality will be highly dependent on the timestamp of each feature and the dataset development process (forecast confidence).

Traditionally, mariners have used meteorological and oceanographic products to ascertain conditions for a specific time. This can include conditions at times in the future, which may be updated as time approaches this future time. Within S-412, various time attributes exist for a forecasting agency to replicate these expectations. These attributes are for when a feature is issued, when a mariner can expect the data to be updated next, when the data is valid and the application of a time range if needed. The utilisation of these attributes will be dependent on a weather forecasting agency's policies and will directly affect the timeliness of a dataset.

Temporal Quality is defined as the quality of the temporal attributes and the temporal relationships of features. It consists of three Data Quality Elements:

- Accuracy of a time measurement: closeness of reported time measurements to values accepted as or known to be true;
- Temporal consistency: correctness of the order of events;
- Temporal validity: validity of data with respect to time.



## 6.5 Thematic accuracy

Thematic Accuracy is defined as the accuracy of quantitative attributes and the correctness of nonquantitative attributes and of the classifications of features and their relationships. It consists of three Data Quality Elements:

- Classification correctness: comparison of the classes assigned to features or their attributes to a Universe of Discourse (for example ground truth or reference data);
- Non-quantitative attribute correctness: measure of whether a non-quantitative attribute is correct or incorrect;
- Quantitative attribute accuracy: closeness of the value of a quantitative attribute to a value accepted as or known to be true.

## 7 Data Capture and Classification

S-412 datasets may be derived from data that has been analysed by a forecaster or numerical weather prediction model output. The data is then translated into text and/or graphical format, reorganised, converted into the compliant format, and/or otherwise processed in order to be made into a usable data format.

### 7.1 Data Sources

Data sources can vary across METAREAs, however, primarily comes from three sources: observations, meteorological and oceanographic forecast models, or derived products from weather models with input from a trained forecaster. Data must be produced and quality controlled by a national authority.

### 7.2 Production Process

Nearly all meteorological and oceanographic information from a forecasting agency will need to be reformatted to meet the standards of this Product Specification. This means:

- Populating the appropriate metadata, and
- Reorganising the data in accordance with the GML and DCEG requirements of this standard.

#### 7.2.1 Metadata

#### 7.2.2 Meteorological and Oceanographic Data

Marine weather warning data must be reformatted to be compliant with this standard. S-412 warning polygons primarily contain a list of coordinate points and time attributes. Coordinate points for a warning polygon should be in decimal degrees. More information about coordinate systems is discussed in section 10.2. Additionally, time, if provided in local time, must be converted to UTC.

Descriptions of the nature of warning polygons use the following units of measurement:

- Wind is given in knots (kt);
- Wave Height is given in metres (m);
- Ice accumulation is given in centimetres per hour (cm/hr);
- Distance is given in nautical miles (NM);
- Latitudes and Longitudes are given in decimal degrees up to 7 decimal numbers.

## 8 Data Maintenance

This clause describes the maintenance process for datasets, source, production process and how feature and portrayal catalogues are to be managed within an S-100 ECDIS.

## 8.1 Dataset Maintenance and Update Frequency

Atmospheric and oceanographic conditions can change rapidly and constant revision or updating of warning datasets is essential. Datasets may be available at scheduled times or available for immediate dissemination and promulgation. Forecast data are often updated multiple times per day according to the internal policies and practices of issuing offices and the WMO. New issues of S-412 data should contain the latest information, and replace the previously issued dataset. S-412 does not currently allow for delta changes to a GML dataset. Amendments and corrections will be produced as necessary to address any errors discovered in a dataset or reflect new updates to the conditions.

## 8.2 Feature and Portrayal Catalogue Management

Each new version of the Marine Weather Warnings Product Specification will include a cumulative feature and portrayal catalogue. This provides charting systems with a single set of catalogues to verify datasets against. Refer to Annex D (Feature Catalogue) and Annex G (Portrayal Catalogue).

New versions of the feature and portrayal catalogues will follow a similar approval process as the main product specification documentation. This process is described in Section 1 Product Specification Maintenance. The latest versions of these catalogues should be included in a package with the main product specification document when submitted for approval. Both new and old versions of the catalogues can be found in the IHO GI Registry.

## 8.3 GML Encoding Management

All S-412 datasets are in Geography Markup Language (GML) format. Any updates or changes to features and attributes will be reflected in the GML Schema File (.XSD), which is used for validating the GML files. Refer to Annex E (GML Data Product Format (encoding)).

# 9 Portrayal

## 9.1 Introduction

S-412 portrayal is intended to contribute to the safe operation of an S-100 based system by:

- Ensuring base and supplementary levels of display for S-412 data; standards of symbols, colours and their standardised assignment to features; scale limitations of data presentation;
- Ensuring the display is clear and unambiguous;
- Establishing an accepted pattern presentation that becomes familiar to mariners and so can be recognized instantly without confusion;
- Utilising the S-100 portrayal model to ensure interoperability.

S-412 portrayal is covered by the portrayal model as defined in S-100. This model reflects how the Portrayal Catalogue is defined for use in systems. The Portrayal Catalogue defines symbology and the portrayal rules for each feature attribute combination contained in the Feature Catalogue.

S-412 uses the portrayal process defined in S-100 Part 9A.

Items included in an S-412 Portrayal Catalogue must be registered in the IHO Geospatial Information (GI) Registry.

< < Statement about the types of data allowed in GML format (points, lines, polygons) > >

## 9.2 Polygon Features

< < Under development – will include information about polygon features with examples of their portrayal, to include initiating portrayal rules, day/night/dusk colour palettes, orientation > >

NOTE Polygon portrayals may be included in surface portrayals. In Annex E, the GML encoding for surface features shows a warning polygon example. So may not need a separate section for polygon portrayals.

### 9.2.1 Temporal Rules

< < Temporal rules > >

### 9.2.2 Transparency Rules

< < Transparency rules > >

### 9.2.3 Interoperability

< < Interoperability statements > >

### 9.2.4 Portrayal Catalogue

< < Under development – once completed, XML will be provided > > The portrayal catalogue contains the mechanisms for the system to portray information found in S-412 datasets. The portrayal catalogue contains the following types of mechanisms and structures:

- Product Input Schema
- Set of portrayal rules
- Set of drawing instructions
- Set of symbols, line styles and colours

The portrayal catalogue model is defined in S-100 Part 9. The S-412 Portrayal catalogue is provided in Annex G and will be available in an XML document which conforms to the S-100 XML Portrayal catalogue Schema. It is structured as follows:

Root — (contains the catalogue named “portrayal\_catalogue.xml”)

Pixmaps (contains XML files describing pixmaps)

ColorProfiles (contains XML files with colour profiles and CSS2 style sheets)

Symbols (contains SVG files with symbols)

LineStyle (contains XML files with line styles)

AreaFills (contains XML files area fills)

Fonts (contains TrueType font files)

Rules (contains XSLT files with templates)

### 9.2.5 Lua vs XSLT Portrayal

< < Under development > >

## 10 Data Product Format (encoding)

### 10.1 Introduction

This clause specifies the encoding for Marine Weather Warning datasets. The principal encoding is the Open Geospatial Consortium (OGC), Geography Markup Language (GML) format as profiled by the S-100 GML schema in Part 10b of S-100. See Annex E – Data Product format (encoding) for a complete description and examples of the data records, fields and subfields defined in GML encoding.

The XML Schema for the S-412 GML application schema is available at the GI Registry (<http://registry.iho.int>). Feature instances must validate against the schema and conform to all other requirements specified in this data product specification including all constraints not captured in the XML Schema document.

## 10.2 Encoding of Latitude and Longitude

### 10.2.1 GML Latitude and Longitude

*Longitude and latitude must be encoded in decimal degrees, e.g.: 12.567 56.765*

*Number of decimals is not specified.*

In S-412 GML files, latitude and longitude must be encoded in decimal degrees, e.g. for a:multiple point feature:

```
^<gml:posList>24.700001 9.95 24.48 15.23 26.629999 22.02</gml:posList>^
```

As modern GIS clients will likely be “axis-aware”, the order of the latitude/longitude pairs matters and should be latitude first, longitude second (YX), as in the examples above. To indicate the WGS84 horizontal coordinate reference system for the YX latitude/longitude pairs, in the GML file use:

```
srsName="urn:ogc:def:crs:epsg::4326"
```

Also, the order of latitude-longitude pairs matters in a multiple point feature. For a curve feature, this order shall be listed in a west to east (W→E) order, as in westernmost point first and easternmost point last, or increasingly positive longitude values (see multiple point feature example above). For a surface feature, this order shall be listed in a clockwise order. Numeric Attribute Encoding.

Floating point or integer attribute values must not be padded by non-significant zeros.

## 10.3 Text Attribute Values

Character strings must be encoded using the character set defined in ISO 10646-1, in Unicode Transformation Format-8 (UTF-8). A BOM (byte order mark) must not be used.

## 10.4 Temporal Attribute Encoding

Times must be in UTC and follow the following 25-character format: `yyyymmddThhmmss` (ISO 8601).

## 10.5 Mandatory Attribute Values

There are five reasons why attribute values may be considered mandatory:

- They determine whether a feature is in the display base;
- Certain features make no logical sense without specific attributes;
- Some attributes are necessary to determine which symbol is to be displayed;
- Certain attributes are used to verify data quality;
- Some attributes are required for safety of navigation.

All mandatory attributes are identified in the Feature catalogue and summarised in the Data Classification and Encoding Guides provided in Annex A.

## 10.6 Missing or Unknown Attribute Values

Missing or unknown values are not permitted in S-412. Mandatory attributes must contain meaningful data.

## 10.7 Encoding Datasets Across 180° Longitude

Datasets must not cross the 180° meridian of longitude.

## 10.8 Structure of Dataset Files

< < A description of the order of data objects in each dataset > >

### 10.9 Object Identifiers

< < MRN guidance is being developed by the S-100 WG. Once completed, this section will contain guidance for completing an MRN similar to urn:mrn:WMO:S412. > >

< < Additional guidance needed about the use of gml:id for objects and geometries. > >

## 10.9 Data Scale

< < Data may be scale independent. This will be determined during testing. > >

## 10.10 Message Filtering Along Routes

< < Statement regarding systems ability to filter information along a route by date, time, and conditions > >

# 11 Data Product Delivery

## 11.1 Introduction

This section specifies the encoding and delivery mechanisms for an S-412 Marine Weather Warnings Overlay product from a data provider to the end user. Data which conforms to this product specification must be delivered by means of an exchange set.

The method of transfer will be primarily web-based, including ftp or direct push/pull dissemination methods. Due to the cost of transmitting data via the Internet, every effort should be made to limit exchange set file sizes below 10 MB before compression and updating frequency. Compressed files should use the Zip compression scheme.

Updated data files typically means issuing or reissuing a new forecast or issuing new warnings, including emergency messages that impact the safety of life at sea. Together, these may occur several times per day. Due to the information containing potentially lifesaving information, ECS' to include ECDIS, should check for new data continuously.

## 11.2 Exchange Set

The S-100 Exchange Set is a container that combines all the elements needed for the exchange of S-100 data. S-412 datasets are grouped into exchange sets. Each exchange set consists of one or more datasets with an associated XML metadata file and a single Exchange catalogue XML file containing the product list and the discovery metadata. It may also include one or more support files.

Static or auxiliary files, such as the feature and portrayal catalogues, SVG files, and additional supporting XML files for alarms and indications, and for interoperability should not be included in these exchange sets unless these files have been updated.

**Units of Delivery:** Exchange Set

**Transfer Size:** 10 MB compressed

**Medium Name:** Digital data delivery

### 11.2.1 Exchange Set Naming

The name of the exchange set must contain the character string 'S412' to identify the data as containing the correct information. It must have the following structure, with S412 indicating the dataset, XXXX the metarea, and CC the 2-letter country code:

*S412\_XXXX\_CC\_FileInformation\_ExchangeSet*

Example: *S412\_XII\_US\_11052018NorthAtlanticForecast\_ExchangeSet*

It is recommended to compress the exchange set folder using zip:

*S412\_XII\_US\_11052018NorthAtlanticForecast\_ExchangeSet.zip*

### 11.3 Exchange Catalogue

< < Will include figure showing Exchange Set/Exchange catalogue/Dataset/Support file formats > >

Each exchange set has a single exchange catalogue which contains the discovery metadata for each dataset and references to any support files. The exchange catalogue acts as the table of contents for the exchange set. The catalogue file of the exchange set must be named S412ed1.CAT; no other file in the exchange set may have the same name.

*The Exchange Catalogue acts as the table of contents for the Exchange Set. The Catalogue file of the Exchange Set must be named CATALOG.XML. No other file in the Exchange Set may be named CATALOG.XML. The contents of the Exchange Catalogue are described in [Section 12](#).*

#### 11.3.1 Exchange Catalogue Naming

### 11.4 Mandatory Elements

The following are required elements within an exchange set:

- Marine Weather Warning datasets – GML encoding of features/attributes and their associated geometry and metadata;
- Exchange catalogue – the XML encoded representation of exchange set catalogue features [discovery metadata];

### 11.5 Optional Elements



Supplementary files – These are contained within the exchange set as files and the mapping from the name included within the dataset and the physical location on the media is defined within the Exchange catalogue. An example of a supplementary file could be an image.

- S-412 Feature catalogue – If it is necessary to deliver the latest feature catalogue to the end user it may be done using the S-412 exchange set mechanism for datasets.
- S-412 Portrayal catalogue — If it is necessary to deliver the latest portrayal catalogue to the end user it may be done using the S-412 exchange set mechanism for datasets.

### 11.6 Dataset

#### 11.6.1 Datasets

One type of dataset file may be produced and contained within an exchange set:

- New dataset: Each new edition of a data set must follow the format defined in 11.6.2 and replace a previously loaded dataset within an ECS. If multiple files exist on a charting system, the system shall have the capacity to verify the most recent file is loaded and visualised for the end user.



Update dataset: In some situations an update dataset will be required. This may occur if issuing an entirely new dataset is not appropriate. The GML update format should be whole-object replacements with an updated issuedDateTime attribution. If a significant number of objects or portions of the dataset needs updating, a dataset should follow the guidelines of a new dataset.

- Re-issue: In the event that a dataset must be reissued, it will be re-issued following the guidelines of a new dataset.

### 11.6.2 Dataset size

< < Exact data size restrictions and recommendations will be determined during testing > >

Datasets may be as large as necessary in terms of extent, provided that the entire exchange set before compression does not exceed 10MB.

### 11.6.3 Dataset file naming

Dataset naming must follow a standard pattern to give implementers greater predictability of incoming datasets (see [part=17,clause=4.3](#)). S-412 dataset naming conventions must follow these rules and no further restrictions are made in this product specification.

**412YYYYØØØØØØØØØØØØØØØØ. 412** the first 3 characters identify the dataset as an S-412 dataset (mandatory);  
**GML**  
 YYYY the fourth to seventh characters identify the producer code according to the Producer Code Register;  
 ØØØØ the eighth to the maximum nineteenth characters are optional and may be used in any way by the producer to provide the unique file name. The following characters are allowed in the dataset name: A to Z, 0 to 9 and the special character \_ (underscore);  
 GML denotes a GML file (according to [part=10b](#)).

### 11.6.4 New Datasets and Cancellations

< < This section defines the sequencing of Marine Weather Warnings datasets for New Editions. > >

## 11.7 Support Files

No support files are included in any of the S-412 features currently. If they are supported in the future then their specification and delivery will be added to this section.

Data set support files offer supplementary information that can be included in an S-412 exchange set.

File Types Extensions Comment XML Additional Language Information

### 11.7.1 Support File Naming

< < This information is provided as a placeholder for now. OEM input is needed before a determination can be made. > >

Support file names are subject to the same naming rules as dataset file names (clause 11.6.3), except that the extension is determined by the support file format.

All support files must have unique universal file identifiers. The file identifier of support information should not be used to describe the physical content of the file. The support file metadata that accompanies the file will inform the user of the name and purpose of the file.

Supporting files will be named according to the following convention:

S412CCXXXXXXXXXX.TTT

S-412 indicates which product specification data the file supports, CC is 2-letter country code of the data producer, XXXXXXXXXXXX is a unique file name defined by the data producer with a maximum character limitation of 10 characters, and TTT is the type of file (file extension, i.e.: XML).

#### 11.7.1.1 Names of language packs

If a language pack created by a data Producer for the S-412 Feature Catalogue is included, it must have the standard 7-character "412CCCC" prefix and the same base name as the standard IHO-issued Feature Catalogue with the 3-letter ISO 639-2/T language code suffixed. The language codes must be exactly those in the S-100 codelist for languages (S100\_MD\_LanguageCode, which can be found in the S-100 Schema distribution). The file extension must be ".XML".

NOTE A language pack issued by the IHO for the IHO Feature Catalogue will use the IHO Producer Code.

### 11.7.2 Support File Management

When a support file is created or issued it must carry a timestamp that indicates when it was issued and for when it is valid. These values are contained in the Support File Metadata as defined in clause 12.1.2 and must not change while the file is still current.

The type of support file is indicated in the “purpose” field of the discovery metadata. Support files carrying the “deletion” flag may be removed from the ECDIS. When a feature pointing to a text, picture or application file is deleted or updated so that it no longer references the file, the ECDIS software must check to see whether any other feature referenced the same file, before that file is deleted.

Support files should be stored in a separate folder within the exchange set. Each support file must be used only once in an exchange set.

## 11.8 Data integrity and encryption

[part=15](#) defines the algorithms for compression, encrypting and digitally signing datasets based on the S-100 Data Model. Use of encryption is optional. Digital Signatures are mandatory for all datasets.

### 11.8.1 Weather Overlay Data Integrity Measures

There is a need for a mechanism within the S-412 data to ensure it has not changed during transmission/delivery. The mechanism chosen for this assurance is a Digital Signature as defined by S-100 Parts 15 and 17. File integrity checks are based on the Digital Signature Algorithm (DSA) as defined in the Federal Information Processing Standard FIPS 186-4. All files in the exchange set shall be digitally signed.

### 11.8.2 Producer Identity and Authentication

A producing agency will need a certified identity, verifiable by the IHO. S-100 Part 15 describes how to define a public/private keypair specific to the producer and how a data producer or distributor is able to have their identity (as embodied in the public / private keypair) certified by the IHO acting as the data protection scheme administrator.

### 11.8.3 Digital Signatures and Metadata

In addition to the metadata included for each dataset file and its digital signature, an exchange set must also provide a public key for every dataset data producer included within the exchange set. The public key is termed “public” because its existence is not kept confidential. Each producer’s public key is included in a “publicKeys” field within the exchange set. These keys are referred to by the digital signature.

Authentication is done in two stages:

- 1) Verifying that the public key information included in the exchange set validates correctly against the IHO’s root level certificate
- 2) Verifying that the exchange set S-412 data has not changed and the file based digital signatures are valid against the producer’s public key. The root certificate certifying IHO’s identity should be held externally on the implementing system and is not part of the dataset metadata.

### 11.8.4 Data Encryption

Dataset files may or may not be encrypted. If encrypted, the encryption method defined in S-100 Part 15 must be applied. then it must be provided only by the mechanisms provided in IHO S-100 Part 15.

### 11.8.5 Use of compression

The data producer decides if compression will be used on the S-412 product files (GML). It is expected that a hydrographic office will make a policy decision and that all the S-412 datasets from the producer will be either compressed or uncompressed.

It is recommended to compress all the dataset files. The ZIP compression method defined in [part=15,clause=5.2](#) should be used where applicable.



### 11.8.6 Use of digital signatures

Digital signatures must be used on all files included in a S-412 compliant Exchange Set to meet the requirements of IMO resolution MSC.428(98) to reduce cyber security risks among users, especially when used in navigations systems at sea. The recommended signature method is defined in [part=15](#).

The digital signature information is encoded in the corresponding discovery block in the exchange catalogue for each file included in the Exchange Set as defined in [part=17](#).

## 11.9 Dataset Loading and Unloading

S-412 datasets are typically intended to be overlays to S-101 ENC and displayed with S-101 ENC data in the background. Systems that support the display of S-412 datasets should provide the user with simple functions to turn the display of S-412 datasets on and off.

Optionally, S-412 datasets can be viewed as overlays to a combination of S-101 ENC and S-102 (Bathymetric Surface) datasets, with S-413 (Marine Weather and Wave Conditions) and S-414 (Marine Weather Observations) datasets incorporated where applicable. The same requirements to allow the user to easily toggle the S-412 dataset on/off persist.

## 12 Metadata

### 12.1 Introduction

This clause defines the mandatory and optional metadata needed for Marine Weather Warnings Datasets and exchange sets.

For information exchange, there are several categories of metadata required: metadata about the overall exchange catalogue, metadata about each of the datasets contained in the catalogue, and metadata about the support files that make up the package.

The metadata may be repeated in a national language by including an optional and additional instance of the dataset discovery metadata per language other than the mandatory English language instance. If metadata in additional languages to English is provided, each support file will also need to be described in that language and referenced from the appropriate language metadata. English metadata should not reference metadata in another language and vice versa.

#### *Use of additional language TBC*

The overall structure of metadata in S-412 exchange sets is the same as in S-100, and is depicted in Figure 10. Metadata in exchange sets consists of discovery metadata for the datasets and support files in the exchange set (classes S100\_DatasetDiscoveryMetadata and S100\_SupportFileDiscoveryMetadata), metadata in ISO 19115-1 format for datasets, and metadata about any feature, portrayal, or interoperability catalogues which are in the exchange set (S100\_catalogueMetadata).

The discovery metadata classes have numerous attributes which enable important information about the datasets and accompanying support files to be examined without the need to process the data, for example decrypt, decompress, load, etc. Other catalogues such as feature and portrayal catalogues may be included in the exchange set in support of the datasets. More detailed information for the classes is depicted in Figure 11 and details about the metadata classes are provided in the tables in clauses 12.1.1 – 12.1.9. The S-100 classes not defined in these clauses may be found in S-100 Part 4A Appendix 4a-D.

The discovery metadata classes have numerous attributes which enable important information about the datasets and accompanying support files to be examined without the need to process the data, e.g. decrypt, decompress, load etc. Other catalogues can be included in the exchange set in support of the datasets such as feature and portrayal catalogues. The attribute “purpose” of the support file metadata provides a mechanism to update support files.


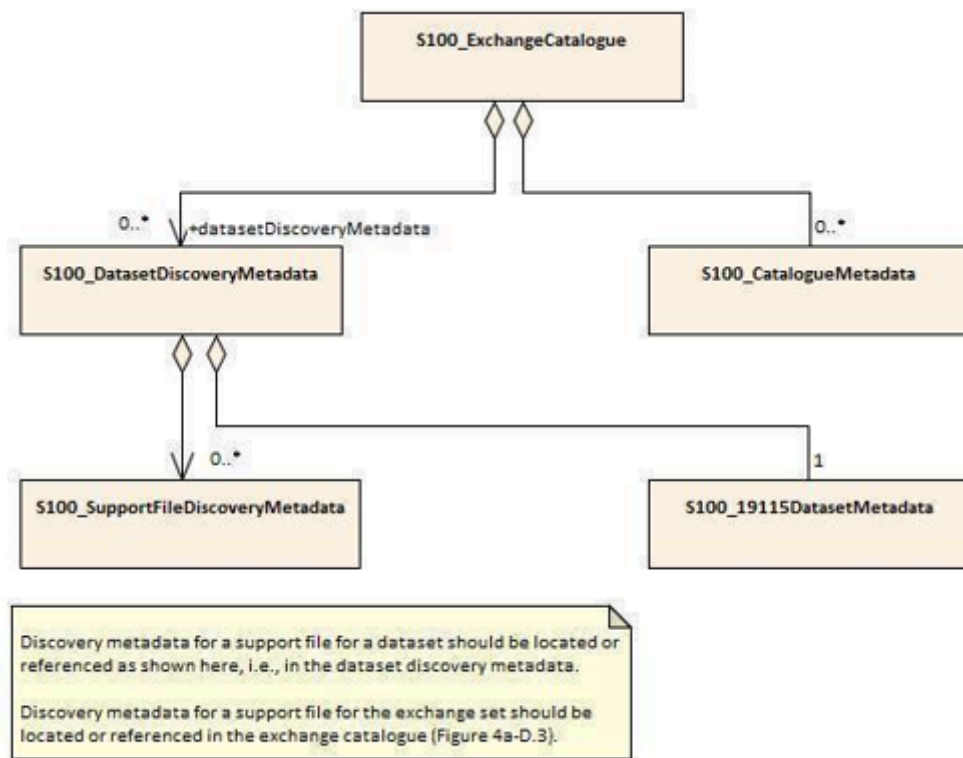


Figure 10

Figure 12-1 — S-412 Metadata Overview



### Figure 12-2 — S-412 Metadata Details

NOTE 2 When a dataset is terminated, the purpose metadata field is set to 3 (terminated), and the editionNumber metadata field is set to 0. All inapplicable but mandatory metadata fields must be nilled.

## 12.2 Metadata for Datasets

- S100\_ExchangeCatalogue
- S100\_ExchangeCatalogueIdentifier
- S100\_CataloguePointofContact
- S100\_DatasetDiscoveryMetadata
- S100\_NavigationPurpose
- S100\_DataCoverage
- S100\_Purpose
- S100\_TemporalExtent
- S100\_EncodingFormat
- S100\_ProductSpecification
- S100\_ComplianceCategory
- S100\_ProtectionScheme
- S100\_SupportFileDiscoveryMetadata

- S100\_SupportFileFormat
- S100\_SupportFileRevisionStatus
- S100\_SupportFileSpecification
- S100\_ResourcePurpose
- S100\_CatalogueDiscoveryMetadata
- S100\_CatalogueScope
- MD\_MaintenanceFrequencyCode
- CI\_DataTypeCode
- PT\_Locale

The S-412 metadata description is a subset of the metadata described in S-100 Part 17, which is a profile of the ISO 19115 standard. The S-412 metadata model restricts the S-100 metadata model to its core elements; S100\_ExchangeCatalogue, S100\_DatasetDiscoveryMetadata, S100\_CatalogueDiscoveryMetadata and S100\_SupportFileDiscoveryMetadata. Moreover, the S100\_DatasetDiscoveryMetadata is further restricted to remove attributes that are not relevant to a Marine Weather Warning service.

### 12.2.1 S100\_DatasetDiscoveryMetadata

Dataset discovery metadata for datasets is described in this table.

**Table 12-1 — S100\_DatasetDiscoveryMetadata parameters**

Role name	Name	Description	Mult	Type	Remarks
Class	S100_DatasetDiscoveryMetadata	Metadata about the individual datasets in the Exchange Catalogue	-	-	The optional S-100 attributes <i>verticalDatum</i> , <i>soundingDatum</i> , <i>optimumDisplayScale</i> and <i>minimumDisplayScale</i> are not used in S-412. <i>References to support file discovery metadata are not permitted because S-412 does not use support files.</i>
Attribute	fileName	Dataset file name	1	URI	See 11.6.3
Attribute	description	Short description giving the area of location covered by the dataset	0..1	CharacterString	Short description of the area covered by dataset. For example, a harbour or port name between two named locations.
Attribute	datasetID	Dataset ID expressed as a Maritime Resource Name	0..1	URN	The URN must be an MRN. <i>See part=3, clause=10</i>

Role name	Name	Description	Mult	Type	Remarks
Attribute	compressionFlag	Indicates if the resource is compressed	1	Boolean	True: indicates a compressed dataset resource False: indicates an uncompressed dataset resource
Attribute	dataProtection	Indicates if the resource is encrypted	1	Boolean	True: indicates an encrypted dataset resource False: indicates an uncompressed dataset
Attribute	protectionScheme	Specification of method used for data protection	0..1	S-100_ProtectionScheme	See figure 11 and S-100 Appendix 4a -D
Attribute	digitalSignatureReference	Specifies the algorithm used to compute digitalSignatureValue	1	S100_DigitalSignatureReference (See Part 15)	"copyright" for copyrighted datasets, omitted otherwise Old Doc: Specifies the algorithm used to compute digitalSignatureValue. See Figure 11 and S-100 Appendix 4a-D
Attribute	digitalSignatureValue	Value derived from the digital signature	1..*	S100_SE_DigitalSignatureReference (See Part 15)	The value resulting from application of digitalSignatureReference Implemented as the digital signature format specified in Part 15
Attribute	copyright	Indicates if the dataset is copyrighted	1	Boolean	True indicates the resource is copyrighted False indicates that the source is not copyrighted
Attribute	classification	Indicates the security classification of the dataset	0..1	Class MD_SecurityConstraints> MD_ClassificationCode (codelist) ISO 19115-1	1) unclassified 2) restricted 3) confidential 4) secret 5) top secret 6) sensitive but unclassified

Role name	Name	Description	Mult	Type	Remarks
					7) for official use only 8) protected 9) limited distribution
Attribute	purpose	The purpose for which the dataset has been chosen	0..1	S100_Purpose	
Attribute	notForNavigation	Indicates the dataset is not intended to be used for navigation	1	Boolean	True indicates the dataset is not intended to be used for navigation False indicates the dataset is intended to be used for navigation
Attribute	specificUsage	The use for which the is intended	0..1	MD_USAGE>specificUsage (character string)	
Attribute	editionNumber	The Edition number of the dataset	0..1	Integer	When a dataset is initially created, the edition number 1 is assigned to it. The edition number is increased by 1 at each new Edition <b>Further discussion is needed on whether or not updated datasets should be allowed</b>
Attribute	updateNumber	Update number assigned to the dataset and increased by one for each subsequent update	0..1	Integer	Update sequence number, must match the update file name. Mandatory only for updating datasets.
Attribute	updateApplicationDate	This data is only used for the base cell files (that is new data set, re-issued, and new edition). not update cell files. All updates dated on or before	0..1	Date	Date of update Mandatory only for updating datasets. <b>Further discussion is needed on whether or not updated datasets should be allowed</b>

Role name	Name	Description	Mult	Type	Remarks
		this date must have been applied by the producer			
Attribute	issueDate	Date in which the data was made available by the Data Producer	0..1	Date	
Attribute	issueTime	Time of day at which the data was made available by the Data Producer	0..1	Time	The S-100 datatype Time
Attribute	boundingBox	The extent of the dataset limits	0..1	EX_GeographicBounding Box	
Attribute	temporalExtent	Specification of the temporal extent of the dataset	0..1	S100_TemporalExtent	The temporal extent is encoded as the date/time of the earliest and latest data records (in coverage datasets) or date/time ranges (in vector datasets) If there is more than one feature in a dataset, the earliest and latest time values of records in all features are used, which means the earliest and latest values may be from different features If date/time information for a feature is not encoded in the dataset, it is treated for the purposes of this attribute as extended indefinitely in the appropriate direction on

Role name	Name	Description	Mult	Type	Remarks
					the time axis, limited by the issue date/ time or the cancellation or supersession of the dataset This attribute is encoded if and only if at least one of the start and end of the temporal extent is known
Attribute	productSpecification	The product specification used to make this dataset	1	S100_ProductSpecification	
Attribute	producingAgency	Agency responsible for producing the data	1	CI_Responsibility>CI_Organisation	See S-100 Table 17-3
Attribute	producerCode	The official IHO Producer Code from S-62	0..1	CharacterString	
Attribute	encodingFormat	The encoding format of the dataset	1	S100_EncodingFormat	
Attribute	dataCoverage	Provides information about data coverages within the dataset	0..*	S100_DataCoverage	See Figure 11 and S-100 Appendix 4a-D. A new or new-edition S-412 dataset must have at least one coverage TBC if S-412 uses Data Coverage feature
Attribute	comment	Any additional information	0..1	CharacterString	
Attribute	defaultLocale	Default language and character set used in the dataset	0..1	PT_Locale	In absence of defaultLocale the language is English, UTF-8
Attribute	otherLocale	Other languages and character sets used in the dataset	0..*	PT_Locale	
Attribute	metadataPointOfContact	Point of contact for metadata	0..1	CI_Responsibility>CI_Individual or CI_	Only if metadataPointOfContact



Role name	Name	Description	Mult	Type	Remarks
				Responsibility>CI_Organisation	is different to producingAgency
Attribute	metadataDateStamp	Date stamp for metadata	0..1	Date	May or may not be the issue date
Attribute	replacedData	Indicates if a cancelled dataset is replaced by another data file(s)	0..1	Boolean	See Note
Attribute	dataReplacement	Dataset name	0..*	CharacterString	A dataset may be replaced by 1 or more datasets See Note
Attribute	navigationPurpose	Classification of intended navigation purpose (for Catalogue indexing purposes)	0..3	S100_NavigationPurpose	If Product Specification is intended for creation of navigational products this attribute should be mandatory
Role	resourceMaintenance	Information about the frequency of resource updates, and the scope of those updates	0..1	MD_MaintenanceInformation	<p>S-100 restricts the multiplicity to 0..1 and adds specific restrictions on the ISO 19115 structure and content. See clause MD_MaintenanceInformation later in this Part</p> <p>Format: PnYnMnDTnHnMnS (XML built-in type for ISO 8601 duration). See clause 17-4.9</p> <p>NOTE replacedData and dataReplacement: The intended use of the attributes replacedData and dataReplacement could be, for example, to provide a</p>

Role name	Name	Description	Mult	Type	Remarks
					mechanism for service providers to build automation when providing replacement data sets to customers within existing subscription periods.
			0..*	Aggregation S100_ SupportFileDiscoveryMetadata	One for each support file linked to this dataset and present in the exchange set TBC— Not in S-100 5.2.0

NOTES Attribute productSpecification: The values of sub-attributes name and version must correspond to this version of the S-412 product specification. The value of the sub-attribute number must be the number assigned to this version of the S-412 product specification in the GI registry.

### 12.2.2 S100\_DataCoverage

Table 12-2 — S100\_DatasCoverage

Role name	Name	Description	Mult	Type	Remarks
Class	S100_DataCoverage	A spatial extent where data is provided; and the display scale information for the provided data	-	-	This field is used by user systems as part of the data loading and unloading algorithms and it is strongly encouraged that Product Specifications mandate the use of one or more of the displayScale provided as part of S100_DataCoverage
Attribute	boundingPolygon	A polygon which defines the actual data limit	1..1	EX_ BoundingPolygon	(See Note 1)
Attribute	temporalExtent	Specification of the temporal extent of the coverage	0..1	S100_ TemporalExtent	The remarks for temporalExtent in the dataset discovery block (S100_DatasetDiscoveryMetadata) apply, except that their scope is the individual coverage and not the dataset as a whole

Role name	Name	Description	Mult	Type	Remarks
Attribute	optimumDisplayScale	The scale with which the data is optimally displayed	0..1	Integer	Example: A scale of 1:25000 is encoded as 25000
Attribute	maximumDisplayScale	The maximum scale with which the data is displayed	0..1	Integer	Mandatory in S-412 Value 700000 means that S-412 data cannot be viewed at a larger scale than 1:700001 (i.e. at 1:700000 it is turned off).
Attribute	minimumDisplayScale	The minimum scale with which the data is displayed	0..1	Integer	Scale policy on scales to be considered by WMO
Attribute	approximateGridResolution	The resolution of gridded or georeferenced data (in metres)	0..*	Real	A single value may be provided when all axes have a common resolution For multiple value provision, use axis order as specified in dataset May be approximate for ungeorectified data For example, for 5 metre resolution, the value 5 must be encoded (See Note 2)  Suggest adding info saying that grid resolution is of no interest (not populated) for S-412

NOTE 1 boundingPolygon is restricted to a single GML Polygon with one exterior and 0 or more interiors expressed as Linear Rings using SRS EPSG:4326. The exterior and optional interiors shall be composed of a closed sequence of  $\geq 4$  coordinate positions expressed individually or as a list (posList). The GML polygon shall have a valid GML identifier.

NOTE 2 approximateGridResolution: If the grid cell size varies over the extent of the grid, an approximated value based on model parameters or production metadata should be used.

NOTE 1 If there are multiple grid or TIN features in the dataset, each feature should have a separate dataCoverage attribute in dataset discovery metadata, except that the coverages for intersecting or adjacent features with the same grid resolution may be combined at producer discretion.

NOTE 2 Bounding polygons for grid features should be the same as the spatial extent of the grid.

NOTE 3 Bounding polygons for TIN features may either be the union of all triangles defined in the TIN, or the bounding box covering all the vertexes of the TIN.

NOTE 4 Bounding polygons for multipoint features (DCF 1 and 8) may be one or more reasonably minimized polygons or bounding boxes that together cover all data points.

NOTE 5 A boundingPolygon is restricted to a single GML Polygon with one exterior and 0 or more interiors expressed as Linear Rings using SRS EPSG:4326. The exterior and optional interiors shall be composed of a closed sequence of  $\geq 4$  coordinate positions expressed individually or as a list (posList). The GML polygon shall have a valid GML identifier.

NOTE 6: For approximateGridResolution, if the grid cell size varies over the extent of the grid, an approximated value based on model parameters or production metadata should be used.

Notes above come from S-411. WMO to consider what is needed for S-412

### 12.2.3 S100\_EncodingFormat

Table 12-3 — S100\_EncodingFormat

Role name	Name	Description	Code	Remarks
Enumeration	S100_DataFormat	The encoding format		The S-100 values ISO/IEC 8211, HDF5 and undefined are not allowed in S-412 datasets
Value	ISO/IEC 8211	The ISO 8211 data format as defined in Part 10a	1	
Value	GML	The GML data format as defined in Part 10b	2	Only GML is allowed in S-412
Value	HDF5	The HDF5 data format as defined in Part 10c	3	
Value	undefined	The encoding is defined in the Product Specification	100	Use of Product Specification specific encoding means the data product and Product Specification is not intended for an IHO S-100 compliant system

### Support file Metadata

To be reviewed by WMO if Support Files are not used in S-412

Support file metadata is intended to describe information about a data resource. It facilitates the management and exploitation of data and is an important requirement for understanding the characteristics of a data resource. If it is required to generate support file metadata in another language than English, an additional instance per language is created. The language is defined in the language attribute of the PT\_Locale class.

### 12.2.4 S100\_SupportFileDiscoveryMetadata

Table 12-4 — S100\_SupportFileDiscoveryMetadata

Role name	Name	Description	Mult	Type	Remarks
Class	S100_SupportFileDiscoveryMetadata	Metadata about the individual support files in the Exchange Catalogue	-	URI	
Attribute	fileName	Name of the support file	1	CharacterString	
Attribute	revisionSatus	The purpose for which the support file has been issued	1	S100_SupportFileRevisionStatus	For example new, replacement, etc.
Attribute	editionNumber	The Edition of the support file	1	Integer	When a dataset is initially created, the Edition number 1 is assigned to

Role name	Name	Description	Mult	Type	Remarks
					it. The Edition number is increased by 1 at each new edition. Edition number remains the same for a re-issue
Attribute	issueDate	Date on which the data was made available by the Data Producer	0..1	Date	
Attribute	supportFileSpecification	The specification used to create this file	0..1	S100_SupportFileSpecification	See Figure 11 and S-100 Appendix 4a-D
Attribute	dataType	The format of the support file	1	S100_SupportFileFormat	The only values allowed for support files referenced in datasets is TIFF Values XML, XSLT, and LUA are reserved for portrayal catalogue files The value ASCII can only be used for portrayal catalogue files that do not fit into one of the other types.
Attribute	otherDataDescription	Support file format other than those listed	0..1	CharacterString	The S-100 attribute otherDataTypedescription is not used in S-412
Attribute	comment	Optional comment	0..1	CharacterString	-
Attribute	compressionFlag	Indicates if the resource is compressed	1..1	Boolean	True indicates a compressed resource False indicates an uncompressed resource
Attribute	digitalSignatureReference	Specifies the algorithm used to compute digitalSignatureValue	0..1	S100_DigitalSignatureReference (See Part 15)	Specifies the algorithm used to

Role name	Name	Description	Mult	Type	Remarks
					compute digitalSignatureValue See Figure 11 and S-100 Appendix 4a-D.
Attribute	digitalSignatureValue	Value derived from the digital signature	0..1	S100_DigitalSignatureValue (See Part 15)	The value resulting from application of digitalSignatureReference Implemented as the digital signature format specified in S-100 Part 15.
Attribute	defaultLocale	Default language and character set used in the support file	1..1	PT_Locale	See Figure 11 and S-100 Appendix 4a-D
Attribute	supportedResource	Identifier of the resource supported by this support file	0..*	CharacterString	Conventions for identifiers are detailed in S-100 Part 15. S-100 allows file URI, digital signature or cryptographic has checksums to be used
Attribute	resourcePurpose	The purpose of the supporting resource	0..*	S100_SupportFilePurpose	new, replacement, or deletion Values “replacement” and “deletion” are allowed only in update datasets.
Attribute	otherLocale		0..*	PT_Locale	See Figure 11 and S-100 Appendix 4a-D
Attribute	fileLocation		1..1	CharacterString	Path relative to the root directory of the exchange set The location of the file after the exchange set is unpacked into directory <EXCH_ROOT> will be <EXCH_ROOT>/

Role name	Name	Description	Mult	Type	Remarks
					<filePath>/ <filename>

### 12.2.5 S100\_SupportFileFormat

**Table 12-5 — S100\_SupportFileFormat**

Role name	Name	Description	Code	Remarks
Enumeration	S100_SupportFileFormat	The format used in the support file	-	The S-100 values JPEG2000, VIDEO, PDF/A or UA, and other are not allowed in S-412.
Value	TCT_UTF-8	UTF-8 text excluding control codes	1	-
Value	HTML	Hypertext Markup Language	3	-
Value	XML	Extensible Markup Language	4	Only for portrayal catalogue files
Value	XSLT	Extensible Stylesheet Language Transformation	5	Only for portrayal catalogue files
Value	VIDEO	Representation of moving images in unspecified format	6	-
Value	TIFF	Tagged Image File Format	7	-
Value	PDF/AorUA	Portable Document File	8	ISO 19005, ISO 32000 Product Specification developers should take careful considerations in using PDF as a support file format. It is recommended that PDF never be used in products that will be used on a navigation system as it may impair night vision Must be PDF/A or UA
Value	LUA	Lua programming language	9	Only for portrayal catalogue files
Value	Other	Other format	100	-
Value	ASCII		-	Only for portrayal catalogue files of types not falling into one of the other categories

### Exchange Catalogue File metadata

#### 12.2.6 S100\_ExchangeCatalogue

All S-412 Exchange catalogue files must contain at least the mandatory metadata elements in this table.

**Table 12-6 — S100\_Exchangecatalogue**

Role name	Name	Description	Mult	Type	Remarks
Class	S100_Exchangecatalogue	An Exchange Catalogue contains the discovery metadata about the exchange datasets and support files	-	-	-
Attribute	identifier	Uniquely	1..1	S100_ExchangeCatalogueIdentifier	See Notes below this table
Attribute	contact	Details about the issue of the datasets contained in the Exchange Catalogue	1..1	S100_CataloguePointOfContact	No special constraints on the S-100 class
Attribute	productSpecification	Details about the Product Specifications used for the datasets contained in the Exchange Catalogue	0..1	S100_ProductSpecification	Conditional on all the datasets using the same product specification. See note below this table for constraints on values
Attribute	defaultLocale	Default language and character set used for all metadata record in this Exchange Catalogue	0..1	PT_Locale	Default is English and UTF-8
Attribute	otherLocale	Other languages and character sets used for the localized metadata records in this Exchange Catalogue	0..*	PT_Locale	Required if any localized entries are present in the Exchange Catalogue
Attribute	exchangeCatalogueDescription	Description of what the Exchange	1..1	CharacterString	-



Role name	Name	Description	Mult	Type	Remarks
		Catalogue contains			
Attribute	exchangeCatalogueComment	Any additional information	0..1	CharacterString	Old Doc: Any additional Information
Attribute	certificates	Signed public key certificates referred to by digital signatures in the Exchange Set	0..*	S100_SE_CertificateContainerType	Content defined in S-100 PArt 15. All certificates used, except the SA root certificate (installed separately by the implementing system) shall be included
Attribute	dataServerIdentifier	Identifies the data server for the permit	0..1	CharacterString	-
Role	datasetDiscoveryMetadata	Exchange Catalogues may include or reference discovery metadata for the datasets in the Exchange Set	0..*	Aggregation S100_DatasetDiscoveryMetadata	Metadata for the Feature, Portrayal and Interoperability Catalogues, if any Old Doc: blank
Role	catalogueDiscoveryMetadata	Metadata for Catalogue	0..*	Aggregation S100_DatasetDiscoveryMetadata	-
Role	supportFileDiscoveryMetadata	Exchange Catalogues may include or reference discovery metadata for the support files in the Exchange Set	0..*	Aggregation S100_SupportFileDiscoveryMetadata	Old Doc: blank
	compressionFlag	-	0..1	Boolean	TRUE: compressed FALSE: not compressed If compressed, the method must be that specified in

Role name	Name	Description	Mult	Type	Remarks
					S-100 Part 15.
Attribute	metadataLanguage	English	1..1	CharacterString	All datasets conforming to this PS must use the English language. A catalogue in English must be provided. Discovery metadata elements within catalogues have their own locale attributes and may be repeated in languages other than English.
Attribute	exchangecatalogueName	catalogue.XML	1..1	CharacterString	catalogue filename
Attribute	sourceMedia		0..1	CharacterString	
Attribute	replacedData		0..1	Boolean	
Attribute	dataReplacement		0..1	CharacterString	
Attribute	-		0..1	Aggregation S100_catalogueMetadata	Metadata for the feature, portrayal, and interoperability catalogues, if any

NOTE 1 Attribute productSpecification: Class S100\_ProductSpecification is depicted in Figure 11 and defined in S-100 Appendix 4a-D. The values of sub-attributes name and version must correspond to this version of the S-412 product specification. (Clause 4.2). The value of the sub-attribute number must be the number assigned to this version of the S-412 product specification in the GI registry.

NOTE 2 Attribute catalogueIdentifier: Class S100\_catalogueIdentifier is depicted in Figure 11 and defined in S-100 Appendix 4a-D. The value of sub-attribute S100\_catalogueIdentifier>identifier must be chosen so that a one-to-one mapping from exchange set name to catalogue identifier is recommended. This assumes a system for assigning unique names to exchange sets – as opposed to datasets – is developed, either by the producer or in this specification. Note that an exchange set may contain multiple datasets.

## 12.3 language

The exchange language must be English. Other languages may be used as a supplementary option. National geographic names can be left in their original national language in the international attributes, or transliterated or transcribed and used in the international attributes. Character strings must be encoded using the character set defined in ISO 10646-1, in Unicode Transformation Format-8 (UTF-8). A BOM (byte order mark) must not be used.

|Attribute |replacedData | |0..1 |Boolean |

|Attribute |replacedData | |0..1 |Boolean | ===== ISO 19139 Metadata

For the description of data following metadata are necessary:

**Table 12-7**

Element Name	Description	Namespace
MD_Metadata	root element	gmd
fileIdentifier	Id for dataset	gmd
language	Product language	gmd
characterSet	Used character set	gmd
contact	Contact data	gmd
dateStamp	date of publishing	gmd
identificationInfo	Specific info about product	gmd

```
<?xml version="1.0" encoding="UTF-8"?>
<gmd:MD_Metadata      xmlns:gmd="http://www.isotc211.org/2005/gmd"
                      xmlns:gco="http://www.isotc211.org/2005/gco"
                      xmlns:gml="http://www.opengis.net/gml/3.2">
  <gmd:fileIdentifier> ... </gmd:fileIdentifier>
  <gmd:language> ... </gmd:language>
  <gmd:characterSet> ... </gmd:characterSet>
  <gmd:contact> ... </gmd:contact>
  <gmd:dateStamp> ... </gmd:dateStamp>
  <gmd:identificationInfo> ... </gmd:identificationInfo>
</gmd:MD_Metadata>
```

**Figure 12-3**

### 12.3.1 fileIdentifier

**Table 12-8**

Element Name	Description	Namespace
fileIdentifier	Id for dataset	gmd
CharacterString	String contained id value	gmd

### 12.3.2 language

**Table 12-9**

Element Name	Description	Namespace
language	Language of dataset	gmd
LanguageCode	Code for language	gmd

```

<gmd:language>
  <gmd:LanguageCode
    codeList="http://www.isotc211.org/2005/resources/CodeList/ML_
gmxCodeLists.xml#LanguageCode"
    codeListValue="eng">English
  </gmd:LanguageCode>
</gmd:language>

```

**Figure 12-4****12.3.3 characterSet****Table 12-10**

Element Name	Description	Namespace
characterSet	characterSet of dataset	gmd
MD_CharacterSetCode	Code for characterSet	gmd

LanguageCode element contains two attributes:

- codeList Link to the list containing the codes for languages
- codeListValue value from the list defining the used language

```

<gmd:characterSet>
  <gmd:MD_CharacterSetCode
    codeList="http://www.isotc211.org/2005/resources/CodeList/ML_
gmxCodeLists.xml#MD_CharacterSetCode"
    codeListValue="utf8">UTF 8
  </gmd:MD_CharacterSetCode>
</gmd:characterSet>

```

**Figure 12-5****12.3.4 contact****Table 12-11**

Element Name	Description	Namespace
contact	Contact for questions to dataset	gmd
CI_ResponsibleParty	ISO Element for contact data	gmd
individualName	Name of responsible person	gmd
CharacterString	individualName value (text)	gco
organisationName	Name of responsible organisation	gmd
CharacterString	organisationName value (text)	gco
contactInfo	Contact information	gmd
CI_Contact	ISO Element for contact information	gmd
phone	phone	gmd
CI_Telephone		gmd
voice		gmd
CharacterString	Voice telephone value (text)	gco
facsimile		gmd
CharacterString	Fax number value (text)	gco

Element Name	Description	Namespace
address		gmd
deliveryPoint		gmd
CharacterString	Postal Address (street, house number)	gco
city		gmd
CharacterString	City name value (text)	gco
administrativeArea		gmd
CharacterString	Administrative Area name value (text)	gco
postalCode		gmd
CharacterString		gco
electronicMailAddress		gmd
CharacterString	Email value (text)	gco
role		gmd
CI_RoleCode		gmd

CI\_RoleCode element contains two attributes:

- codeList: link to the list containing the codes for roles
- codeListValue: value from the list defining the used roles

```

<gmd:contact>
  <gmd:CI_ResponsibleParty>
    <gmd:individualName>
      <gco:CharacterString>Jürgen Holfort</gco:CharacterString>
    </gmd:individualName>
    <gmd:organisationName>
      <gco:CharacterString>FMHA Germany (BSH)</gco:CharacterString>
    </gmd:organisationName>
    <gmd:contactInfo>
      <gmd:CI_Contact>
        <gmd:phone>
          <gmd:CI_Telephone>
            <gmd:voice>
              <gco:CharacterString>+49 (0) 381 4563-782</gco:
CharacterString>
            </gmd:voice>
            <gmd:facsimile>
              <gco:CharacterString>+49 (0) 381 4563-949</gco:
CharacterString>
            </gmd:facsimile>
          </gmd:CI_Telephone>
        </gmd:phone>
        <gmd:address>
          <gmd:CI_Address>
            <gmd:deliveryPoint>
              <gco:CharacterString>Neptunallee 5</gco:
CharacterString>
            </gmd:deliveryPoint>
            <gmd:administrativeArea>
              <gco:CharacterString>Rostock</gco:CharacterString>
            </gmd:administrativeArea>
            <gmd:postalCode>
              <gco:CharacterString>18057</gco:CharacterString>

```

```

        </gmd:postalCode>
        <gmd:electronicMailAddress>
            <gco:CharacterString>ice@bsh.de</gco:
CharacterString>
        </gmd:electronicMailAddress>
    </gmd:CI_Address>
</gmd:address>
</gmd:CI_Contact>
</gmd:contactInfo>
<gmd:role>
    <gmd:CI_RoleCode
        codeList="http://www.isotc211.org/2005/resources/CodeList/
gmxCodeLists.xml#CI_RoleCode" codeListValue="originator">originator</gmd:CI_
RoleCode>
    </gmd:role>
</gmd:CI_ResponsibleParty>
</gmd:contact>

```

**Figure 12-6****12.3.5 dateStamp****Table 12-12**

Element Name	Description	Namespace
dateStamp	Date Stamp	gmd
Date	Formatted String (yyyy-MM-dd)	gco

The dateStamp should be used for the publication date (just day using gco:date or including the time using gco:datetime). The date and time where the chart is considered valid should be given in identificationinfo (see 10.1.1.6). Operational charts should have a time stamp within the temporal extent given in identificationinfo, a dateStamp preceding the temporal extent denotes a prognosis chart, a dateStamp that is more recent then the temporal extent denotes an historic reanalysis or a climatological chart.

```

<gmd:dateStamp>
    <gco>Date>2013-02-25</gco>Date>
</gmd:dateStamp>

```

**Figure 12-7****12.3.6 identificationInfo****Table 12-13**

Element Name	Description	Namespace
identificationInfo		gmd
MD_DataIdentification		
citation		
CI_Citation		
title		
CharacterString		gco
date		
CI_Date		

Element Name	Description	Namespace
date		gco
dateType		
CI_DateTypeCode		
abstract		
CharacterString		gco
language		
LanguageCode		
characterSet		
MD_CharacterSetCode		
topicCategory		
MD_TopicCategoryCode		
extent		
EX_Extent		
geographicElement		
EX_GeographicBoundingBox		
westBoundLongitude		
Decimal		gco
eastBoundLongitude		
Decimal		gco
southBoundLatitude		
Decimal		gco
northBoundLatitude		gmd
Decimal		gco
temporalElement		gmd
EX_TemporalExtent		gmd
extent		gmd
TimePeriod		gml
beginPosition		gml
endPosition		gml

```

<gmd:identificationInfo>
  <gmd:MD_DataIdentification>
    <gmd:citation>
      <gmd:CI_Citation>
        <gmd:title>
        </gmd:title>
        <gmd:date>

```

```

    <gmd:CI_Date>
      <gmd:date>
        <gco:Date>2013-02-25</gco:Date>
      </gmd:date>
      <gmd:dateType>
        <gmd:CI_DateTypeCode>
codeList="http://www.isotc211.org/2005/resources/CodeList/ML_gmxCodeLists.
xml#CI_DateTypeCode" codeListValue="creation">creation</gmd:CI_DateTypeCode>
        </gmd:dateType>
      </gmd:CI_Date>
    </gmd:date>
  </gmd:CI_Citation>
</gmd:citation>
<gmd:abstract>
</gmd:abstract>
<gmd:language>
  <gmd:LanguageCode>
codeList="http://www.isotc211.org/2005/resources/CodeList/ML_gmxCodeLists.
xml#LanguageCode" codeListValue="eng">English</gmd:LanguageCode>
  </gmd:language>
  <gmd:characterSet>
    <gmd:MD_CharacterSetCode>
codeList="http://www.isotc211.org/2005/resources/CodeList/ML_gmxCodeLists.
xml#MD_CharacterSetCode"
codeListValue="utf8">UTF 8</gmd:MD_CharacterSetCode>
    </gmd:characterSet>
    <gmd:topicCategory>
      <gmd:MD_TopicCategoryCode>geoscientificInformation</gmd:MD_
TopicCategoryCode>
    </gmd:topicCategory>
    <gmd:extent>
      <gmd:EX_Extent>
        <gmd:geographicElement>
          <gmd:EX_GeographicBoundingBox>
            <gmd:westBoundLongitude>
              <gco:Decimal>8.963</gco:Decimal>
            </gmd:westBoundLongitude>
            <gmd:eastBoundLongitude>
              <gco:Decimal>30.353</gco:Decimal>
            </gmd:eastBoundLongitude>
            <gmd:southBoundLatitude>
              <gco:Decimal>53.613</gco:Decimal>
            </gmd:southBoundLatitude>
            <gmd:northBoundLatitude>
              <gco:Decimal>65.0</gco:Decimal>
            </gmd:northBoundLatitude>
          </gmd:EX_GeographicBoundingBox>
        </gmd:geographicElement>
        <gmd:temporalElement>
          <gmd:EX_TemporalExtent>
            <gmd:extent>
              <gml:TimePeriod gml:id="ek1-20130225-16">
                <gml:beginPosition>2013-02-25</gml:beginPosition>
                <gml:endPosition>2013-02-27</gml:endPosition>
              </gml:TimePeriod>
            </gmd:extent>
          </gmd:EX_TemporalExtent>
        </gmd:temporalElement>
      </gmd:EX_Extent>
    </gmd:extent>
  </gmd:MD_DataIdentification>
</gmd:identificationInfo>

```

Figure 12-8



## 12.4 Language

The language used in metadata must be English. Other languages are optional and only as addition to the English version.

Metadata used for the discovery, identification, and use of S-412 datasets in S-100-based navigation systems (specifically, an S-100 capable ECDIS) is encoded in the exchange catalogue. This metadata conforms to [part=17](#), with any product-specific restrictions noted in this section.

## 12.5 Exchange Set metadata

For information exchange, there are several categories of metadata required: metadata about the overall Exchange Catalogue, metadata about each of the datasets contained in the Catalogue.

The discovery metadata classes have numerous attributes which enable important information about the datasets to be examined without the need to process the data (e.g., decryption, decompression, loading). Other Catalogues can be included in the Exchange Set in support of the datasets such as Feature and Portrayal.

The following clauses define the mandatory and optional metadata needed for S-412. In some cases, the metadata may be repeated in a national language. If this is the case it is noted in the Remarks column.

The XML schemas for S-412 exchange catalogues will be available from the IHO Geospatial Information (GI) Registry and/or the S-100 GitHub site (<https://github.com/IHO-S100WG>).

The S-412 exchange catalogue uses the S-100 exchange catalogue schemas which are available from the S-100 schema server at <https://schemas.s100dev.net> (downloadable archives are also available on the site for offline use). Implementation of the S-412-specific constraints described in following clauses below is left to developer decision as it can be done in various ways depending on implementation frameworks and the requirements of production or application software.

Page intentionally left blank

## 12.6 S100\_ExchangeCatalogue

Each Exchange Set has a single S100\_ExchangeCatalogue which contains meta information for the data in the Exchange Set.

S-412 uses S100\_ExchangeCatalogue without modification.

### 12.6.1 S100\_ExchangeCatalogueIdentifier

S-412 uses S100\_ExchangeCatalogueIdentifier without modification.

### 12.6.2 S100\_CataloguePointOfContact

S-412 uses S100\_CataloguePointOfContact without modification.

### 12.6.3 S100\_NavigationPurpose

S-412 uses S100\_NavigationPurpose without modification.

### 12.6.4 S100\_DataCoverage

S-412 uses S100\_DataCoverage without modification, but with additional remarks and changes to the multiplicity.

**Table 12-14 — S100\_DataCoverage parameters**

Role name	Name	Description	Mult	Type	Remarks
Class	S100_DataCoverage	A spatial extent where data is provided along with the display scale information for the provided data	-	-	This field is used by user systems as part of the data loading and unloading algorithms, and it is strongly encouraged that Product Specifications mandate the use of one or more of the displayScale provided as part of S100_DataCoverage.
Attribute	boundingPolygon	A polygon which defines the actual data limit	1	EX_BoundingPolygon	<a href="#">Clause 12.6.4, Note</a>
Attribute	temporalExtent	Specification of the temporal extent of the coverage	0	S100_TemporalExtent	<b>The <i>temporalExtent</i> is not used in S-412.</b>
Attribute	optimumDisplayScale	The scale at which the data is optimally displayed	1	Integer	Example: A scale of 1:25000 is encoded as 25000
Attribute	maximumDisplayScale	The maximum scale at which the data is displayed	0..1	Integer	

Role name	Name	Description	Mult	Type	Remarks
Attribute	minimumDisplayScale	The minimum scale at which the data is displayed	0..1	Integer	
NOTE <i>boundingPolygon</i> is restricted to a single GML Polygon with one exterior and 0 or more interiors expressed as Linear Rings using SRS EPSG:4326. The exterior and optional interiors shall be composed of a closed sequence of $\geq 4$ coordinate positions expressed individually or as a list (posList). The GML polygon shall have a valid GML identifier.					

### 12.6.5 S100\_Purpose

S-412 uses S100\_Purpose without modification, but with a restriction on the allowed values.

**Table 12-15 — S100\_Purpose**

Role name	Name	Description	Code	Remarks
Enumeration	S100_Purpose	The purpose of the dataset	-	<b>The S-100 values <i>update</i>, <i>reissue</i>, and <i>delta</i> are not used in S-412.</b>
Value	newDataset	Brand new dataset	1	No data has previously been produced for this area.
Value	newEdition	New edition of the dataset or Catalogue	2	Includes new information which has not been previously distributed by updates.
Value	cancellation	Dataset or Catalogue that has been cancelled	5	Indicates the dataset or Catalogue should no longer be used and can be deleted.

### 12.6.6 S100\_EncodingFormat

S-412 uses S100\_EncodingFormat with a restriction on the allowed values to permit only the S-100 GML format for S-412 datasets.

**Table 12-16 — S100\_EncodingFormat parameters**

Role name	Name	Description	Code	Remarks
Enumeration	S100_EncodingFormat	The encoding format	-	<b>The only value allowed in S-412 is “GML”.</b>
Value	GML	The GML data format as defined in <a href="#">part=10b</a>	3	-

### 12.6.7 S100\_ProductSpecification

S-412 uses S100\_ProductSpecification without modification, but with additional remarks and changes to the multiplicity.

**Table 12-17 — S100\_ProductSpecification parameters**

Role name	Name	Description	Mult	Type	Remarks
Class	S100_ProductSpecification	The Product Specification contains the information needed to build the specified product.	-	-	-
Attribute	name	The name of the Product Specification used to create the datasets	1	CharacterString	The name in the GI Registry should be used for this field. <b>For S-412, this name is “” (as of 25 June 2024).</b>
Attribute	version	The version number of the Product Specification	1	CharacterString	TR 2/2007 specifies versioning of Product Specifications <b>Example: 1.2.1 for S-412 Edition 1.2.1</b>
Attribute	date	The version date of the Product Specification	1	Date	-
Attribute	productIdentifier	Machine readable unique identifier of a product type	1	CharacterString (Restricted to Product ID values from the IHO Product Specification Register in the IHO Geospatial Information (GI) Registry)	<b>For S-412, this identifier is “S-412” (without quotes).</b>
Attribute	number	The number used to lookup the product in the Product Specification Register of the IHO GI registry	1	Integer	For IHO Product Specifications, these numbers should be taken from the IHO Product Specification Register in the IHO GI Registry. <b>The corresponding Idx-number of the IHO Registry for S-412 is numbered xxx.</b>

**12.6.8 S100\_ProtectionScheme**

S-412 uses S100\_ProtectionScheme without modification.

**12.7 S100\_CatalogueDiscoveryMetadata**

S-412 uses S100\_CatalogueDiscoveryMetadata without modification.

### 12.7.1 S100\_CatalogueScope

S-412 uses S100\_CatalogueScope without modification.

### 12.7.2 PT\_Locale

S-412 uses PT\_Locale without modification. The class PT\_Locale is defined in [\[iso-19115-1\]](#). LanguageCode, CountryCode, and MD\_CharacterSetCode are ISO codelists which are defined in a codelists file which is part of the S-100 Edition 5.2.0 schema distribution.

## 12.8 Certificates and Digital Signatures

The classes S100\_SE\_CertificateContainerType ([part=15,clause=8.11.1](#)), S100\_SE\_DigitalSignatureReference ([part=15,clause=8.11.7](#)), and S100\_SE\_DigitalSignature are defined in [part=15](#) and implemented in the S-100 generic schemas.

In accordance with [part=15](#), only the ECDSA algorithm is allowed from the S100\_SE\_DigitalSignatureReference enumeration.

S-412 uses S100\_SE\_DigitalSignature without modification. As stated in [part=15,clause=15-8.11.3](#):

“The class S100\_SE\_DigitalSignature is realized as one of either S100\_SE\_SignatureOnData (a digital signature of a particular identified resource) or an additional digital signature defined using the class S100\_SE\_AdditionalSignature, each of which is either a S100\_SE\_SignatureOnData or S100\_SE\_SignatureOnSignature element as described in [part=15,clause=8.8](#). [part=17](#) metadata thus allows for multiple digital signatures, a single mandatory S100\_SE\_SignatureOnData and any number of additional signatures, either of the data or other signatures.”

## 13 Dataset Encoding

WMO to consider if this section should be removed:

- Dataset Coverage and Display Scale Range rules may not apply if Data Coverage feature is not used in S-412.
- Geometry is already detailed in section 4.

### 13.1 Introduction

A dataset is a grouping of features, attributes, geometry and metadata which comprises a specific coverage.

### 13.2 Dataset Rules

In order to facilitate the efficient processing of S-412 data the geographic coverage of a given **maximum display** scale may be split into multiple datasets.

The discovery metadata of a dataset must list all the **Data Coverage** features contained within that dataset and their assigned scale attributions.

Datasets must not cross the 180° meridian; this includes both the **Data Coverage** features and the bounding box for the dataset.

### 13.3 Data Coverage rules

- All base datasets (new dataset, new edition) must contain at least one **Data Coverage** feature.
- The data boundary of the base dataset is defined by the extent of the **Data Coverage** features and must be contained within the bounding box.
- The **Data Coverage** features within a dataset must not overlap, however **Data Coverage** features from different datasets may overlap if they have differing **maximum display scales**.
- Datasets may overlap, however there must be no overlapping **Data Coverage** features of the same **maximum display scale**, except at the agreed adjoining national data limits, where, if it is difficult to achieve a perfect join, a 5 metre overlapping buffer zone may be used; and for this situation, there must be no gaps in data.
- When a dataset has multiple **Data Coverage** features, then the **minimum display scale** must be the same for all **Data Coverage** features within the dataset. The **maximum display scale** for multiple **Data Coverage** features within a dataset may be different.
- When a dataset has multiple **Data Coverage features** then the **maximum display scale** of the dataset must be equal to the largest **maximum display scale** of the **Data Coverage** features.
- The **maximum display scale** is considered to be the equivalent of the compilation scale of the data.

## 14 Display Scale Range

A scale range of a dataset is used to indicate a range of scales between which a producer considers the data is intended for use. The smallest scale is defined by the **minimum display scale** and the largest scale by the **maximum display scale**. These scales must be set at one of the scales specified elsewhere in this product specification.

When the system's viewing scale is smaller than the value indicated by **minimum display scale**, features within the **Data Coverage** feature are not displayed.

## 15 Geometry

### 15.1 S-412 Geometry

S-412 features are encoded as vector entities which conform to S-100 geometry configuration level 3a (S-100 clause 7-4.3).

Level 3a is described by the following constraints:

- Each curve must reference a start and end point (they may be the same).
- Curves must not self intersect. See S-100 Figure 7-5.
- Areas are represented by a closed loop of curves beginning and ending at a common point.
- In the case of areas with holes, all internal boundaries must be completely contained within the external boundary and the internal boundaries must not intersect each other or the external boundary. Internal boundaries may touch other internal boundaries or the external boundary tangentially (that is at one point) as shown in S-100 Figure 7-6.
- The outer boundary of a surface must be in a clockwise direction (surface to the right of the curve) and the curve orientation positive. The inner boundary of a surface must be in a counter-clockwise direction (surface to the right of the curve) and the curve orientation negative. See S-100 Figure 7-7.

## 16 List of annexes

These Annexes are separate files and can be found either in the S-411 Product Specification distribution package or at the locations indicated.

Annex A Data Classification and Encoding Guide. Separate document. IHO Geospatial Information Registry, <https://registry.iho.int>

Annex B Encoding Format. GML schema, Schematron rule files, and schema documentation. S-100 schema server, <https://schemas.s100dev.net> **TBC**

Annex C Feature catalogue. XML file. IHO Geospatial Information Registry, <https://registry.iho.int>

Annex D Validation Checks. Separate document. IHO Geospatial Information Registry, <https://registry.iho.int> **TBC**

Annex E Portrayal Catalogue. Zip archive of portrayal catalogue. IHO Geospatial Information Registry, <https://registry.iho.int>