

Monthly Intelligence Report

Edition 001 — The Praha–Brno–Ostrava Corridor

Where the energy transition is outrunning the grid. Inaugural edition · June 2026 · SSI v4.0.2

CONTENTS

- [A Executive Summary](#)
- [B Cyber & Economic Exposure Monitor](#)
- [C Data Refresh & Changelog](#)
- [D Deep-Dive: The Praha–Brno–Ostrava Corridor](#)
- [E European Context Card](#)
- [F SSI Enhanced Neural Network](#)
- [G Looking Ahead](#)

SECTION A

Executive Summary

SUBSTATIONS SCORED

1,077

7 HV ≥110 kV · 288 MV (22–35 kV) ·
782 distribution-tier

GRID LINES MAPPED

15,838 km

12,938 HV ≥110 kV · 2,779 MV ·
OSM live extraction

MC SIMULATIONS

21.5 M

20,000 per substation · Gaussian
copula

PUBLIC DATA SOURCES

30+

95 variables · zero proprietary

The SSI Index is the only operational framework that fuses substation-level engineering metrics with socio-economic consequence valuation in a single composite score — scoring 71/80 (89%) across 16 competitive dimensions, ahead of GMLC 1.1 (48/80), EPRI (40/80), and academic MCDA frameworks (41/80). Its engine processes 60,000+ source data points per run, executes 21.5 million Monte Carlo simulations through a 20×20 Gaussian copula correlation matrix, and performs 0.49 billion arithmetic operations — producing 64,620 output data points with full uncertainty quantification across 1,077 substations (LIVE — OSM) and 6,484 grid lines spanning 15,838 km.

Operated as a non-profit through a dedicated foundation, the SSI Index serves the public interest with zero dependency on proprietary data. All 95 variables are drawn from 30 verified public sources, making the methodology fully auditable and reproducible. Initially covering Czechia's entire transmission and distribution grid, the Index is progressively being rolled out to all OECD countries — applying the same silo-breaking approach: fusing grid risk with societal exposure at asset-level resolution wherever open data permits.

Substation in Focus

Rozvodna Středočeský 010 (MV)

Central Bohemia, Central Bohemia · distribution-tier

0.832

Critical

0.134


86th

R_FINAL

CLASSIFICATION

CI WIDTH

FLEET PERCENTILE

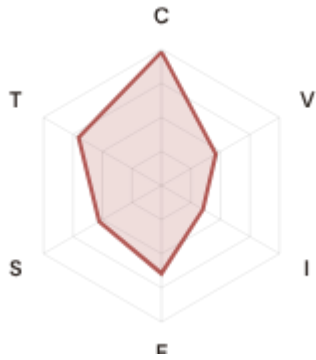

COMPONENTS

C Continuity: 0.980 / 0.30 (327%) ⬇

I Infrastructure: 0.352 / 0.25 (141%)

S Saturation: 0.528 / 0.20 (264%)

V Voltage: 0.461 / 0.10 (461%)

E Economic: 0.645 / 0.10 (645%)

T Transition: 0.703 / 0.05 (1405%) ⬇

MODIFIERS

R3 Consequence: 1.087 ⬆ amplifies

R4 Graph Criticality: 1.084 ⬆ amplifies

R6a Restoration: 0.947 ⬇ dampens

R6b Seismic: 0.999 → neutral

R7 Digital Readiness: 1.013 ⬆ amplifies

This month's spotlight — automatically selected for June 2026 — is **Rozvodna Středočeský 010 (MV)** in Central Bohemia, Central Bohemia. With an R_final of 0.832 (Critical band, 86th fleet percentile), its risk profile is dominated by the T (Transition) component at 1405% of its weight ceiling, followed by E (Economic) at 645%. Modifiers collectively shift R_base by 9.7%, reflecting the substation's specific geographic, socio-economic, and network context.

SECTION B — RECURRING MODULE

Cyber & Economic Exposure Monitor

Why this section exists: Traditional grid risk frameworks treat cybersecurity and economic vulnerability as separate domains. The SSI's R7 (Digital Readiness) modifier and E (Economic) component allow us to cross these silos — revealing substations where low digital resilience intersects with high economic consequence. This is precisely the anticipatory intelligence that Czechia Numérique / Czechia 2030 digitalisation planning requires.

CYBER HIGH EXPOSURE

0

0.0% of fleet

BLIND SPOTS

400

High/Critical + R7 < median

AVG R7 MODIFIER

1.0148

Range [0.99, 1.05]


HIGH-CONSEQUENCE SUBS

276

25.6% · R3 ≥ 1.10

B.1 Cyber-Physical Risk Matrix

Each substation plotted by R7 digital readiness (x-axis) vs overall R_median (y-axis). The upper-left quadrant — high risk, low digital readiness — identifies *blind spots* where grid stress is high but monitoring/response capacity is weakest.

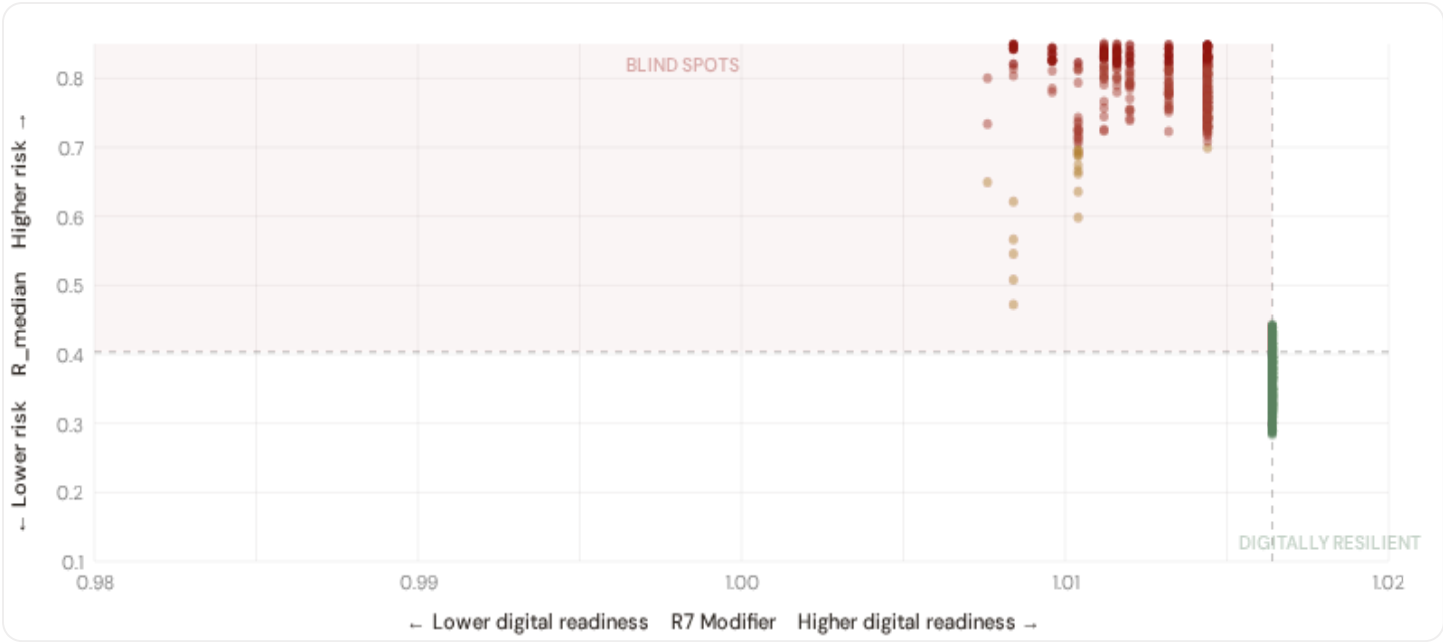


● Low ● Medium ● High ● Critical Dashed lines = fleet medians

The cyber-physical matrix identifies **400 blind-spot substations** — scoring High or Critical on overall risk while sitting below the fleet median for digital readiness ($R7 < 1.0164$). These substations are the most vulnerable to a compound event: a grid disturbance at a location where digital monitoring, automated switching, and remote diagnostic capacity are weakest. The blind spots concentrate in **South Moravia (156)**, **Hradec Králové (52)**, **Central Bohemia (41)**. Across the full fleet, 0 substations (0.0%) carry a HIGH cyber-exposure classification, while 0 (0.0%) are in the LOW tier.

B.2 Economic Impact by Business Fabric

Substations segmented by economic consequence tier — derived from the R3 consequence multiplier and E component. Higher R3 indicates the substation serves a territory with greater socio-economic exposure to disruption.

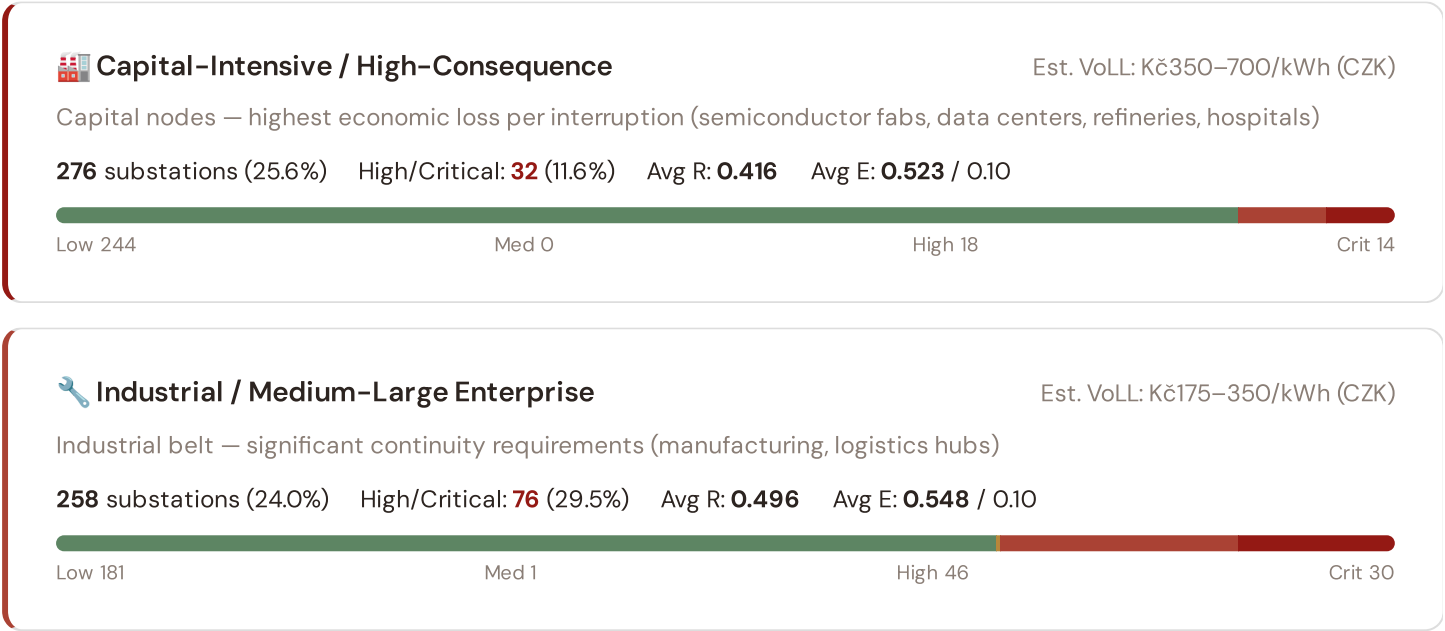



Commercial / SME-Dense

Est. VoLL: Kč70–175/kWh (CZK)

Service economy + retail — moderate individual impact (commercial districts, mixed-use)

261 substations (24.2%) High/Critical: **69** (26.4%) Avg R: **0.485** Avg E: **0.539** / 0.10



Light / Agricultural / Rural

Est. VoLL: Kč23–70/kWh (CZK)

Sparse activity, agricultural land — lower VoLL (residential, agricultural)

282 substations (26.2%) High/Critical: **223** (79.1%) Avg R: **0.741** Avg E: **0.518** / 0.10




Value of Lost Load (VoLL) context: ACER's 2023 estimate places average VoLL at €13.1/kWh for industrial customers and €3.2/kWh for residential. The SSI's R3 consequence multiplier allows us to identify which substations serve the most economically exposed territories. **32 substations** combine capital-intensive economic fabric ($R3 \geq 1.10$) with High or Critical risk classification — representing the highest VoLL-weighted exposure in the fleet.

The capital-intensive tier concentrates in **Prague (244)**, **South Moravia (20)**, **Moravian-Silesian (12)** — regions where industrial corridors depend on uninterrupted power for continuous processes. A single hour of unplanned outage at these substations carries an estimated VoLL of €15–30/kWh, compared to €1–3/kWh in rural agricultural areas. The fleet-wide average energy poverty rate is 5.5%, but this masks sharp regional variation: Southern regions combine higher energy poverty with higher grid risk, creating a double vulnerability that the E component captures. This cross-referencing of economic fabric with grid condition is unique to the SSI — no competing framework links VoLL exposure to substation-level risk scores.

B.3 ORP Digital Readiness Ranking

ORP ranked by average R7 modifier — lower values indicate weaker digital infrastructure (DESI sub-dimensions). Cross-referenced with average R_{median} to identify ORP combining digital exposure with high grid stress.

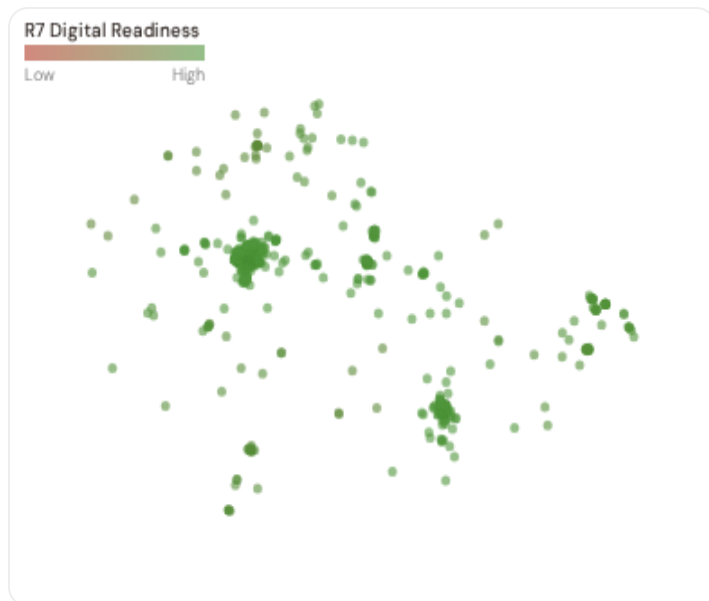

WORST DIGITAL READINESS — TOP 15 REGION REGIONS

Longer bar = higher R7 = better digital infrastructure.

1	Karlovy Vary ▲ high R	1.0076
2	Vysočina ▲ high R	1.0084
3	Ústí nad Labem ▲ high R	1.0084
4	South Bohemia ▲ high R	1.0096
5	Olomouc ▲ high R	1.0096
6	Liberec ▲ high R	1.0104
7	Zlín ▲ high R	1.0104
8	Moravian-Silesian ▲ high R	1.0112
9	Plzeň ▲ high R	1.0112
10	Hradec Králové ▲ high R	1.0116
11	Pardubice ▲ high R	1.0120
12	Central Bohemia ▲ high R	1.0132
13	South Moravia ▲ high R	1.0144
14	Prague	1.0164

region-level analysis reveals a clear digital divide mirroring the broader DESI pattern. **Karlovy Vary** has the lowest average R7 (1.0076), while **Prague** leads at 1.0164 — a spread of 0.0088 across the R7 range. **13 region regions** combine below-median digital readiness with above-median grid risk, making them priority targets for digitalisation investment. The R7 modifier is intentionally narrow to reflect the current limitations of open DESI data — as NIS2 compliance reporting matures, future editions will expand R7's dynamic range and incorporate operational technology (OT) security indicators.

B.4 Monthly Pulse

Inaugural edition — Baseline Snapshot (June 2026). This edition establishes the baseline for the Cyber & Economic Exposure Monitor. Key reference points: fleet average R7 = 1.0148, median = 1.0164; 0 substations classified HIGH cyber-exposure; 400 blind-spot substations (High/Critical risk + below-median R7); 190 Critical-band substations with below-median digital readiness. Future editions will track deltas against this baseline.

SECTION C

Data Refresh & Changelog

The SSI v4.0.2 draws on **30 verified public data sources** feeding 95 variables across 6 components and 7 modifiers. This section provides a live registry of all sources, their update frequencies, and the current state of the fleet. Transparency in data vintage is central to the SSI's credibility.

TOTAL SOURCES

30

95 variables

WEEKLY / MONTHLY

3

High-frequency feeds

QUARTERLY / ANNUAL

18

Regular refresh cycle

STATIC / DERIVED

6


Standards + scenarios

Data Source Registry — June 2026

CHMU-FL	ČHMÚ HPPS + VÚV TGM HEIS	CONTINUOUS	Watershed	1 var
OSM	OSM Power Infrastructure	CONTINUOUS	Node/edge	4 vars
HZS	GŘ HZS ČR Civil Protection	CONTINUOUS	Municipal	1 var
NEN	NEN + ÚOHS Procurement	MONTHLY	PA-level	1 var
OTE	OTE Atlas of Power Plants	QUARTERLY	Municipality	3 vars
CNB	ČNB ARAD + InfoStat	QUARTERLY	NUTS2	2 vars
CzInv	CzechInvest + ARES	QUARTERLY	Regional	2 vars
ERU	ERÚ Annual Operations Report	ANNUAL	DSO	5 vars
CEZ-D	ČEZ Distribuce annual report	ANNUAL	DSO area	4 vars
EGD	EG.D annual report	ANNUAL	DSO area	4 vars
PRE	PREdistribuce annual report	ANNUAL	DSO area	4 vars
MPO	MPO RES register	ANNUAL	National	3 vars
CSU	ČSÚ — Český statistický úřad	ANNUAL	NUTS3/LAU	8 vars
CSU-RA	ČSÚ Regional Accounts	ANNUAL	NUTS2	2 vars
MFCR	MF ČR Tax Statistics	ANNUAL	Municipal	1 var
EEA	EEA Air Quality e-Reporting	ANNUAL	~1 km	3 vars
CENIA	CENIA — Environmental Information	ANNUAL	Kraj	2 vars
EUR	Eurostat Energy Statistics	ANNUAL	NUTS2	3 vars
DESI	DESI Digital Economy Index	ANNUAL	EU Regional	1 var
MZCR	MZ ČR Healthcare Registry	ANNUAL	Kraj	1 var
CGS	ČGS Geofond — Czech Geological Survey	STATIC	~5 km	2 vars
IEEE-1	IEEE C57.91 Thermal Model	STATIC	Asset-level	1 var
IEC-1	IEC 60076 Power Transformers	STATIC	Asset-level	1 var

IEC-826	IEC 60826 Overhead Line Loading	STATIC	Zone	1 var
ISO-9223	ISO 9223 Atmospheric Corrosion	DERIVED	Kraj	1 var
CEPS	ČEPS Open Data Portal	HOURLY/MONTHLY	Zone (8)	5 vars
ENTSE	ENTSO-E Transparency Platform	HOURLY	Bidding zone	3 vars
CHMU	ČHMÚ — Czech Hydrometeorological Inst.	HOURLY/ANNUAL	Station	5 vars
CDS	Copernicus CDS / ERA5	HOURLY/STATIC	0.25° (~25 km)	4 vars
OPM	Open-Meteo Weather API	HOURLY	~1 km	1 var

C.1 Update Frequency Timeline

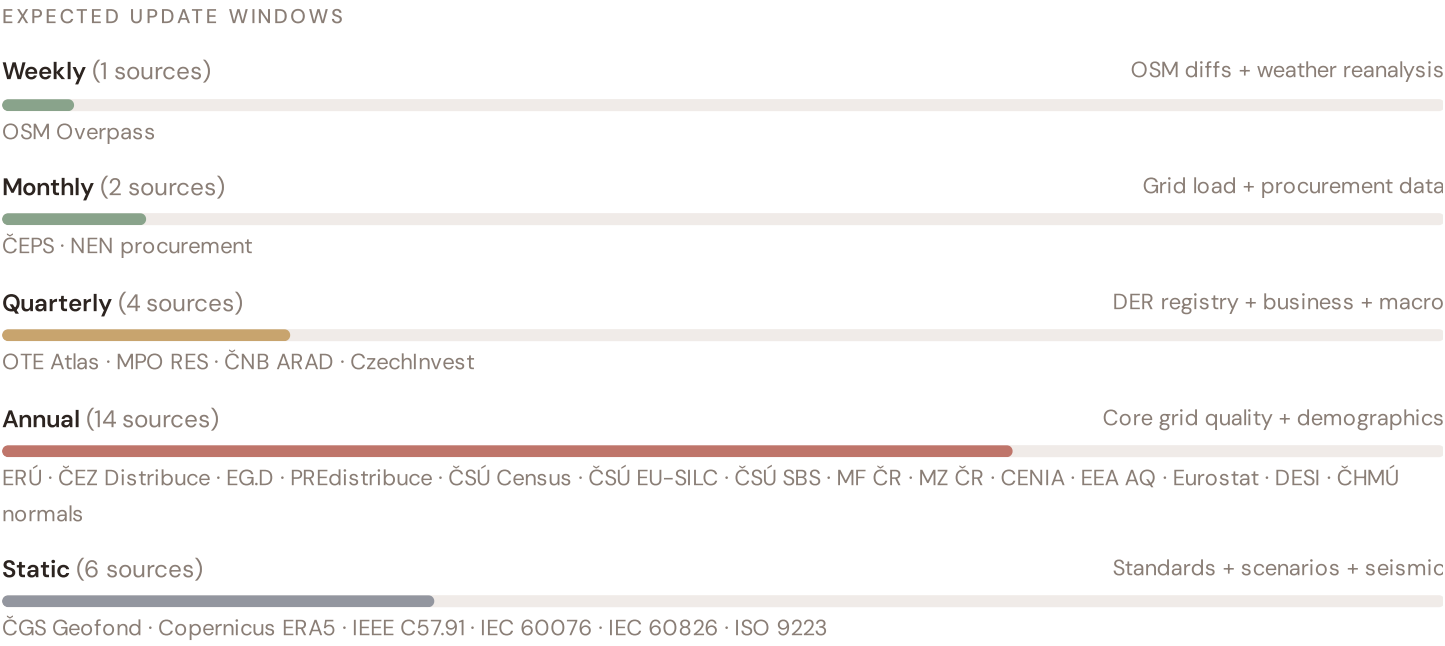

C.2 Fleet Score Snapshot



BAND DISTRIBUTION



No primary data sources have been updated since the v4.0.2 launch baseline. All **1,077 substation scores remain unchanged** this edition. The fleet median R of 0.404 (mean 0.537) reflects a distribution skewed toward the lower bands, with 61.2% in Low and 1.7% in Medium. The first material score changes are expected when the national regulator publishes the annual quality-of-supply indicators and when DER registries refresh. High-frequency sources (OSM, weather) update weekly but feed only infrastructure topology (R4) and thermal proxy (I5), which have minimal impact on fleet-level score distribution.

C.3 Changelog — v3.4 → v4.0.2

18 changes tracked across PO, P1, and P2 releases

F1	NEW	New T component — Energy Transition Exposure (T1)	\$2, \$4
F2	NEW	New R6a — Restoration Speed Modifier (CAIDI-based)	\$5
F3	ENHANCED	R3 enhanced — Energy Poverty Vulnerability (V_socio = ČSÚ EU-SILC)	\$5
F4	ENHANCED	R4 enhanced — Graph-theoretic betweenness + bridge detection (NetworkX)	\$5
F5	ENHANCED	R2 enhanced — Climate Trajectory (CMIP6 SSP2-4.5) — pending live ERA5 file	\$5
F6	ENHANCED	R7 Digital Readiness — Kraj-level DESI model	\$5
L1	NEW	New I5, I7–I9 metrics — thermal, load, corrosion (ISO 9223), hydrogeo	\$2, \$8
L2	ENHANCED	E2 Innovation Enrichment — HRST + startup density (CzechInvest + ARES)	\$6
CZ1	NEW	Czechia onboarded — 11 source modules scaffolded, d05_osm LIVE (1,077 substations) P2	Stage 1
CZ2	NEW	CZ regulatory stack mapped: ČEPS / ERÚ / ČEZ-Dist + EG.D + PRE / ČSÚ / ČHMÚ / ČGS P2	Stage 1
CZ3	NEW	Scoring engine: 14 kraje × 6 components → R_final + Markov ETTC + 20k MC + Sobol P2	Stage 2
CZ4	NEW	Dashboard: 8 HTML pages + Pattern C ssi-metadata.js + 30-source registry P2	Stage 3
CZ5	ENHANCED	R3 economic tier thresholds CZ-calibrated [1.095 / 1.030 / 1.013] from actual distribution P2	Stage 4
CZ6	ENHANCED	R6b seismic α band CZ-narrow [0.10, 0.30] (Bohemian Massif vs Italy [0.40, 0.85]) P2	Stage 4
CZ7	NEW	Automation pipeline scaffolded — FIRST_REFRESH=2026-06 — monthly + quarterly + annual workflows P2	Stage 5
CZ8	NEW	Landing-page Czechia map-active (oecd → active flip) + OECD count 23 → 24 P2	Stage 6
D1	DATA	30-source Czech registry verified (vs Italy 30, France 35) — all open-licensed	Date
D2	DATA	OSM Overpass live extraction: 1,077 substations + 6,484 power lines + 15,838 km	Date

The Praha–Brno–Ostrava Corridor: Where Coal Reliance Meets Energy Transition Pressure


Deep-dive rotation: Each edition features a substantive thematic analysis. The 12-month rotation: **Ed. 001** Praha–Brno–Ostrava corridor corridor · **002** DER saturation hotspots (border kraje) · **003** Climate vulnerability under CMIP6 · **004** Urban–Rural economic impact disparity · **005** coal–fleet decommissioning risk and transition risk · **006** Infrastructure age vs smart-meter rollout · **007** Stress–Resilience quadrant trends · **008** T-component forward projections · **009** ORP Grid Health Cards · **010** Academic validation and peer feedback · **011** European replication feasibility · **012** Year in review.

D.1 Why the Praha–Brno–Ostrava corridor, Why Now



The South Bohemia hosts **30 substations** across 1 region regions, making it the locus of this edition's deep-dive analysis. Its risk profile is concentrated in the upper bands: **0 substations (0.0%)** are classified High and **30 Critical**, with only **0** in the Low band. 100% of corridor substations score above the national fleet median of 0.404. The corridor median R of 0.887 reflects the local risk profile. The corridor concentrates the country's industrial heartland. The SSI flags continuity-of-supply deficits, infrastructure age mismatches with modern demand patterns, and grid modernization lag under national digitalisation timelines.

D.2 Corridor Map and Scoring

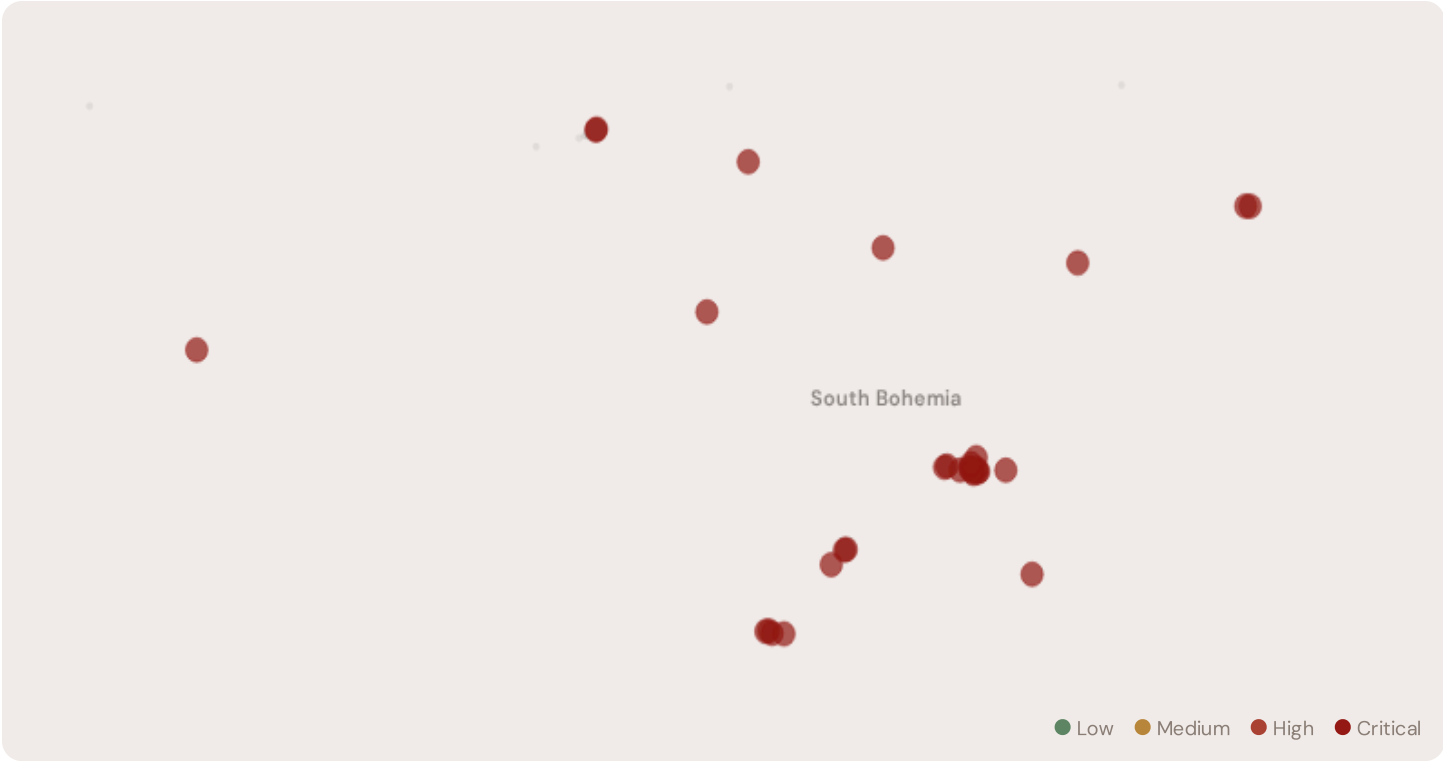

Substation	Province	R_Final	Band	C	V	I	E	S	T	Alert
Rozvodna Jihočeský 015 (MV)	South Bohemia	0.939	Critical	0.980	0.589	0.367	0.523	0.332	0.776	C, T
Rozvodna Jihočeský 012 (MV)	South Bohemia	0.931	Critical	0.980	0.594	0.346	0.580	0.351	0.805	C, T
Rozvodna Jihočeský 014 (MV)	South Bohemia	0.927	Critical	0.980	0.589	0.312	0.572	0.421	0.831	C, T
Rozvodna Jihočeský 008 (MV)	South Bohemia	0.925	Critical	0.980	0.637	0.314	0.539	0.422	0.786	C, T
Rozvodna Jihočeský 004 (MV)	South Bohemia	0.919	Critical	0.967	0.591	0.388	0.565	0.390	0.776	C, T
Rozvodna Jihočeský 003 (MV)	South Bohemia	0.918	Critical	0.980	0.571	0.323	0.542	0.351	0.773	C, T
Rozvodna Jihočeský 021 (MV)	South Bohemia	0.914	Critical	0.955	0.563	0.346	0.532	0.407	0.834	C, T
Rozvodna Jihočeský 010	South Bohemia	0.911	Critical	0.961	0.603	0.334	0.584	0.413	0.816	C, T

SUBSTATION	PROVINCE	R_FINAL	BAND	C	V	I	E	S	T	ALERT
(MV)										
Rozvodna Jihočeský 017 (MV)	South Bohemia	0.910	Critical	0.980	0.591	0.353	0.535	0.393	0.784	C, T
Rozvodna Jihočeský 006 (MV)	South Bohemia	0.906	Critical	0.954	0.550	0.290	0.571	0.349	0.785	C, T
... 20 additional substations — explore full corridor in Digital Twin →										

D.3 Component Analysis

COMPONENT AVERAGES — SOUTH BOHEMIA VS FLEET

C — Continuity	0.972 vs 0.335 (+191%)
I — Infrastructure	0.345 vs 0.580 (-41%)
S — Saturation	0.381 vs 0.695 (-45%)
V — Voltage	0.594 vs 0.429 (+38%)
E — Economic	0.549 vs 0.531 (+3%)
T — Transition	0.803 vs 0.359 (+124%)

MODIFIER AVERAGES — SOUTH BOHEMIA VS FLEET

R3 Consequence	0.985	fleet 1.080 ↓
R4 Graph Crit.	0.914	fleet 0.880 ↓
R6a Restoration	0.945	fleet 0.926 ↓
R6b Seismic	0.999	fleet 0.999 →
R7 Digital Read.	1.010	fleet 1.015 →

The dominant risk driver across the South Bohemia corridor is **T (Transition)**, averaging 0.803 against a fleet average of 0.359 — occupying 1606% of its weight ceiling ($w = 0.05$). The second contributor is **V (Voltage)** at 0.594 vs fleet 0.429 (594% of ceiling). Among modifiers, the R3 consequence multiplier averages 0.985 (fleet: 1.080), reflecting the socio-economic exposure of the corridor. The R6b seismic modifier averages 0.999, capturing the local seismic exposure — a dimension invisible to every competing framework.

D.4 ORP Breakdown

REGION RISK PROFILE — SORTED BY MEAN R

Longer bar = lower R = better resilience.

South Bohemia

30 subs · avg R = 0.880 · H:0 C:30 M:0

The region regions-level breakdown reveals significant intra-regional variation. **South Bohemia** leads with a mean R of 0.880 across 30 substations, while **South Bohemia** scores 0.880 — a spread of 0.000 within a single corridor. The SSI's substation-level granularity reveals that the South Bohemia is not uniformly stressed but contains distinct sub-corridors of concentrated risk — precisely the kind of spatial pattern that investment planning requires.

D.5 Implications

30 South Bohemia substations score $R \geq 0.650$, placing them in the upper quartile of national risk. For NEPN / national digital plan / RRP investment prioritisation, this analysis identifies the South Bohemia sub-corridor as the highest-priority target — where DER deployment is accelerating against ageing infrastructure with above-average continuity deficits and significant socio-economic exposure. The SSI's silo-breaking approach reveals what no single-discipline framework can: that these substations matter not only because of their engineering condition, but because the communities they serve are disproportionately vulnerable to disruption. This is precisely the anticipatory grid planning capability that the SSI was built to provide.


SECTION E — RECURRING MODULE

European Context Card

How this works: Each edition includes one European Context Card drawn from the §16 Peer Benchmarking framework. The card is selected to complement the month's deep-dive theme. This month: **SAIDI comparison** — because the Praha–Brno–Ostrava corridor analysis hinges on Czechia's continuity performance relative to European peers. Future editions rotate through: VoLL comparison (Ed. 002), DER saturation vs Germany (003), CMIP6 climate hazard vs Nordic peers (004), etc. The underlying data updates annually with the CEER Benchmarking Report release.

Unplanned SAIDI (min/customer/year) — Selected Countries

Longer bar = lower SAIDI = better reliability. Values in min/customer/year.

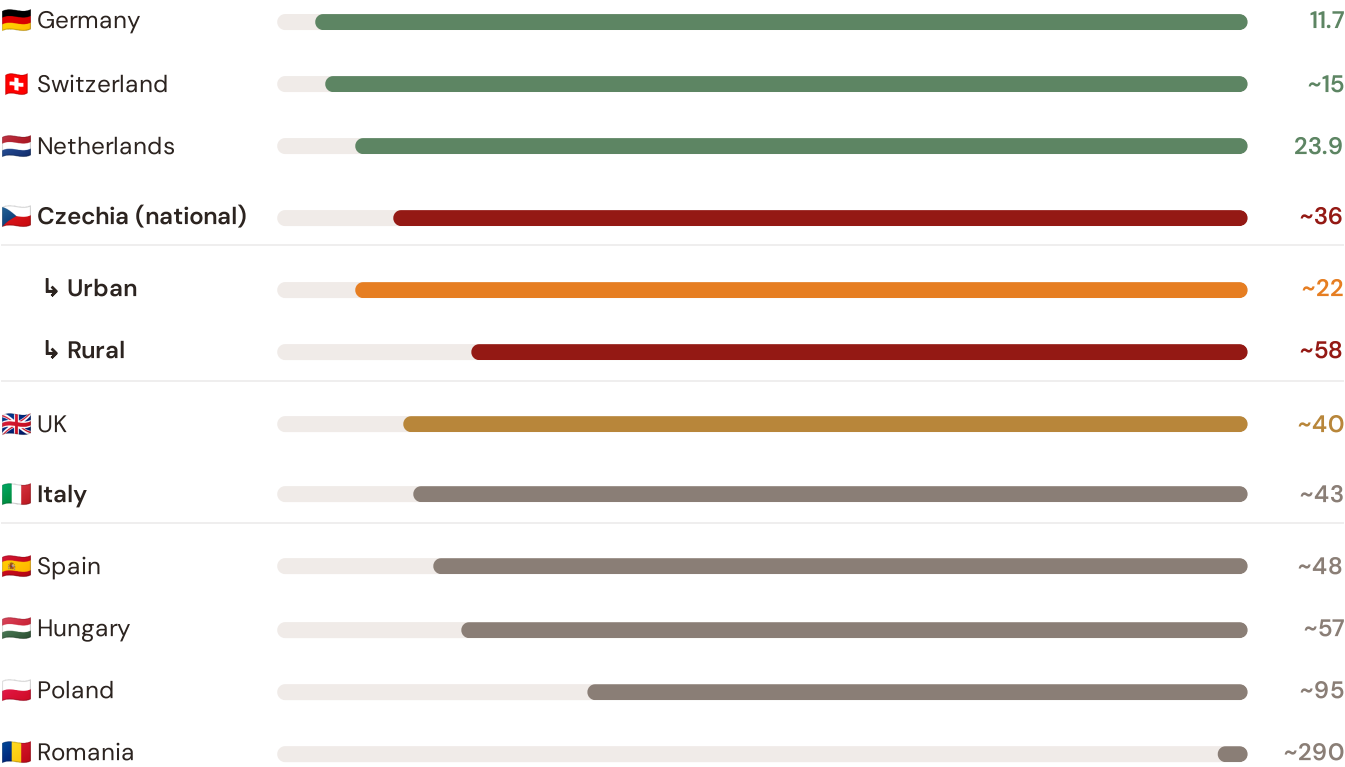

Source: CEER 7th Benchmarking Report (2022); ERÚ TIQE (2023); Bundesnetzagentur (2024). Czechia sub-categories from ERÚ territory classification (urban/rural). · See §16 Peer Benchmarking for full methodology and caveats. · Updated annually with CEER BR release.


This month's key insight: The South Bohemia corridor deep-dive shows **30 substations** (of 30) with C-component above 70% of its weight ceiling — indicating continuity-of-supply performance consistent with rural territory classification. The corridor's average C of 0.972 is **2.9× the fleet average** of 0.335. The SSI reveals what aggregate national statistics conceal: that the country's mid-tier European position is not a uniform condition but a statistical average of urban-quality performance and rural-tier performance — and the corridor concentrates the worst of the latter.

Regional Risk Ranking — All 13 Czech Kraje

Where does the Praha–Brno–Ostrava corridor sit within the national landscape? Regions sorted by mean R_median, with band distribution and fleet comparison.

Longer bar = lower R = better resilience. Sorted worst → best.



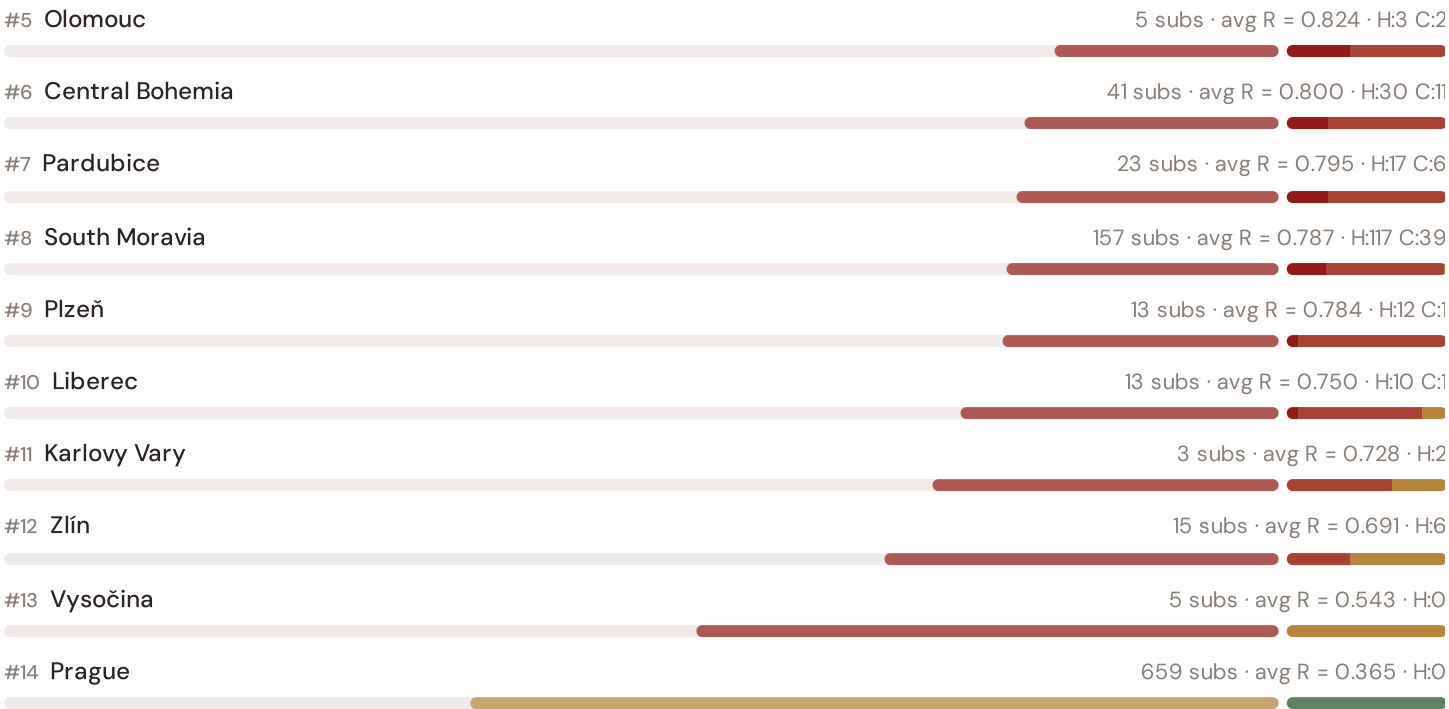


The South Bohemia ranks **#1 of 14 region regions** by mean R_{median} , placing it among the upper tier of national risk. The three most stressed are South Bohemia, Ústí nad Labem, Moravian-Silesian, while the three most resilient are Prague, Vysočina, Zlín. 13 of 14 score above the fleet average of 0.537. This ranking — possible only because the SSI scores every substation individually rather than relying on aggregate DSO or national statistics — reveals the true spatial distribution of grid stress. It is precisely this substation-level granularity that positions the SSI as a tool for investment prioritisation: not treating entire regions as monoliths, but identifying the specific corridors within each that demand attention.

SECTION F — RECURRING MODULE

SSI Enhanced Neural Network — Monthly Topic

From grid intelligence to BESS valuation platform. The SSI Index answers *"How healthy is this substation?"* The SSI Enhanced Neural Network (SSI-ENN) extends this into: *"What is a BESS worth at this substation — to the ČEZ Distribuce/ČEPS and to the community?"* Each edition of this report explores one building block of the SSI-ENN's five-layer architecture, showing how the SSI Index data feeds directly into investment-grade grid analytics.

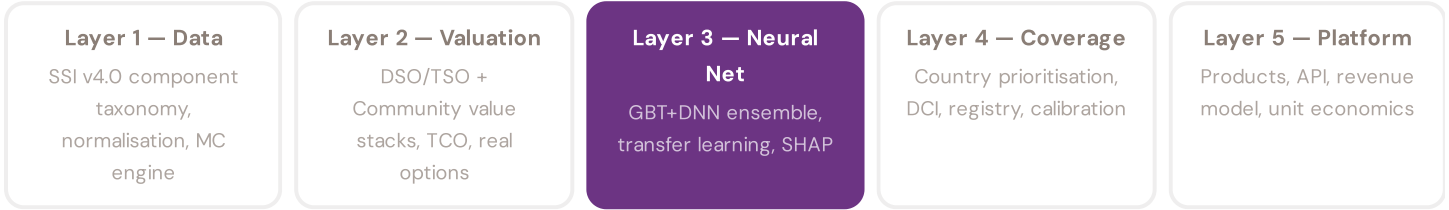

LAYER 3 §0.5.6 · June 2026

Explainability & SHAP Values

Clients need to understand not just the prediction but WHY a substation ranks highly

Investment-grade models require interpretability. SHAP (SHapley Additive exPlanations) provides a rigorous, game-theoretic attribution of each feature's contribution to each prediction. For every substation, the SSI-ENN produces a SHAP

waterfall: starting from the fleet-average valuation and showing how each feature pushes the estimate up or down. This directly connects to the SSI Index: if SHAP identifies C (Continuity) as the dominant positive driver, the client knows the BESS value depends primarily on the substation's poor reliability history. Transparency converts model outputs into investment decisions.

KEY CONCEPTS

→ SHAP: game-theoretic feature attribution per prediction

→ Waterfall: fleet average → substation prediction

→ Direct traceability to SSI components and data sources

→ Feature importance validated against domain expertise

LIVE SSI DATA CONNECTION

The training set comprises 1,077 substations with complete feature vectors. Average CI_width of 0.148 across the fleet provides the uncertainty ground truth that the neural network's quantile regression heads must calibrate against. The fleet's risk distribution — 659 Low, 18 Medium, 210 High, 190 Critical — ensures balanced training across all risk bands.

Coming next month:

LAYER 3

 Uncertainty Quantification — *Investment-grade predictions require calibrated confidence intervals, not just point estimates*

SECTION G

Looking Ahead

NEXT MONTH — EDITION 02

Mountain Region

Deep-dive into Region 10's grid risk profile — substation map, component analysis, region regions breakdown. European Context Card: Light-rural tier — limited substation density.

NEXT DATA REFRESH

Q3 2026 — 4 Quarterly Sources

OTE Atlas, MPO RES, ČNB ARAD, CzechInvest are due for refresh in Q3. Impact: DER registry (T1), business fabric indicators (E2), macro-economic data. Highest-impact annual source pending: **ČSÚ — Český statistický úřad** (8 variables → P1 pop_density, EP_rate, elderly, healthcare, P3 digital).

FLEET SPOTLIGHT

Hradec Králové: Highest Risk Concentration

Hradec Králové has the highest concentration of High/Critical substations: **52 of 52 (100%)** are in the upper risk bands — avg R = 0.855. This makes it the most acute risk corridor in the fleet.

Edition 02 will be published on the second Thursday of July 2026. Deep-dive region: **Region 10**. To ensure you receive it, confirm your subscription segment (General / Institutional / Academic) by email to ssi_index@ikenga.eu.

Feedback welcome. The SSI Index is designed to evolve through stakeholder dialogue. If you represent a Czech utility, ERÚ, ČEPS, ČEZ Distribuce, municipal energy company, or academic institution and would like to contribute data or methodology feedback, please contact us at ssi_index@ikenga.eu. The SSI's credibility depends on open scrutiny.

SSI Monthly Intelligence Report — Edition 001 (Inaugural)

Published 9 April 2026 · SSI Index v4.0.2 · 1,077 substations (LIVE OSM) · ~6,484 grid lines · 6 components · 20 metrics · 6 modifiers
10,000-iteration Gaussian Copula Monte Carlo · Sobol global sensitivity analysis (196,608 evals/substation) · CMIP6 SSP2-4.5

© 2026 Altinium Invest · Corso Vittorio Emanuele 110/5, 80121 Napoli · P.IVA 10656441218

USCO Registration pending · SIAE Deposito Opere Inedite · Protected under L. 633/1941, Berne Convention, Copyright Act 1976

[View in browser](#)