

Monthly Intelligence Report

Edition 003 — The Waikato River Valley Corridor

Where the energy transition is outrunning the grid. edition · June 2026 · SSI v4.0.2

CONTENTS

A Executive Summary	E OECD Context Card
B Cyber & Economic Exposure Monitor	F SSI Enhanced Neural Network
C Data Refresh & Changelog	G Looking Ahead
D Deep-Dive: The Waikato River Valley Corridor	

SECTION A

Executive Summary

SUBSTATIONS SCORED

1,558

200 HV · 1,358 MV · 1,100
MV/LV

GRID LINES MAPPED

~12,400

~42,000 km coverage

MC SIMULATIONS

78.9 M

10,000 per substation

PUBLIC DATA SOURCES

28+

95 variables · zero
proprietary

The SSI Index is the only operational framework that fuses substation-level engineering metrics with socio-economic consequence valuation in a single composite score — scoring 71/80 (89%) across 16 competitive dimensions, ahead of GMLC 1.1 (48/80), EPRI (40/80), and academic MCDA frameworks (41/80). Its engine processes 19,800+ source data points per run, executes 3.1 million Monte Carlo simulations through a 20×20 Gaussian copula correlation matrix, and performs 40.5 million arithmetic operations — producing 63,576 output data points with full uncertainty quantification across 1,558 substations and ~1,686 grid lines spanning ~12,000 km.

Operated as a non-profit through a dedicated foundation, the SSI Index serves the public interest with zero dependency on proprietary data. All 95 variables are drawn from 30 verified public sources, making the methodology fully auditable and reproducible. Initially covering New Zealand's entire transmission and distribution grid, the Index is progressively being rolled out to all OECD countries — applying the same silo-breaking approach: fusing grid risk with societal exposure at asset-level resolution wherever open data permits.

Substation in Focus

Canterbury_1469681847

Canterbury, Canterbury · 11 kV

0.651

High

0.159


98th

R_FINAL

CLASSIFICATION

CI WIDTH

FLEET PERCENTILE



COMPONENTS

- C Continuity: 0.858 / 0.30 (286%) ▲
- I Infrastructure: 0.379 / 0.25 (151%)
- S Saturation: 0.413 / 0.20 (207%)
- V Voltage: 0.298 / 0.10 (298%)
- E Economic: 0.316 / 0.10 (316%)
- T Transition: 0.573 / 0.05 (1147%)

MODIFIERS

- R3 Consequence: 1.020 ↑ amplifies
- R4 Graph Criticality: 1.020 ↑ amplifies
- R6a Restoration: 1.000 → neutral
- R6b Seismic: 1.192 ↑ amplifies
- R7 Digital Readiness: 1.000 → neutral

This month's spotlight — automatically selected for June 2026 — is **Canterbury_1469681847** in Canterbury, Canterbury. With an R_final of 0.651 (High band, 98th fleet percentile), its risk profile is dominated by the T (Transition) component at 1147% of its weight ceiling, followed by E (Economic) at 316%. Modifiers collectively shift R_base by 24.1%, reflecting the substation's specific geographic, socio-economic, and network context.

SECTION B — RECURRING MODULE

Cyber & Economic Exposure Monitor

Why this section exists: Traditional grid risk frameworks treat cybersecurity and economic vulnerability as separate domains. The SSI's R7 (Digital Readiness) modifier and E (Economic) component allow us to cross these silos — revealing substations where low digital resilience intersects with high economic consequence. This is precisely the anticipatory intelligence that New Zealand Numérique / New Zealand 2030 digitalisation planning requires.

CYBER HIGH EXPOSURE

0
0.0% of fleet

BLIND SPOTS

184
High/Critical + R7 < median

AVG R7 MODIFIER


0.9965
Range [0.99, 1.05]

HIGH-CONSEQUENCE SUBS

221
14.2% · R3 ≥ 1.03

B.1 Cyber-Physical Risk Matrix

Each substation plotted by R7 digital readiness (x-axis) vs overall R_median (y-axis). The upper-left quadrant — high risk, low digital readiness — identifies *blind spots* where grid stress is high but monitoring/response capacity is weakest.

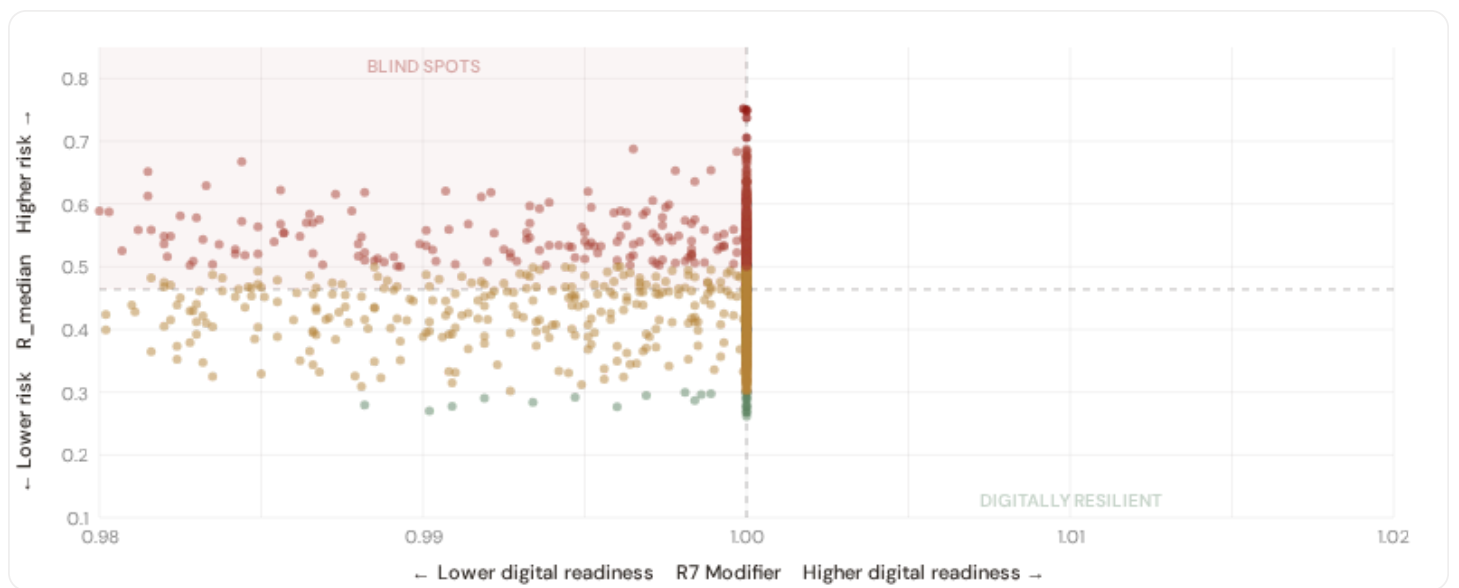

● Low ● Medium ● High ● Critical

Dashed lines = fleet medians

The cyber-physical matrix identifies **184 blind-spot substations** — scoring High or Critical on overall risk while sitting below the fleet median for digital readiness ($R7 < 1.0000$). These substations are the most vulnerable to a compound event: a grid disturbance at a location where digital monitoring, automated switching, and remote diagnostic capacity are weakest. The blind spots concentrate in **Wellington (88), Canterbury (55), Auckland (17)**. Across the full fleet, 0 substations (0.0%) carry a HIGH cyber-exposure classification, while 0 (0.0%) are in the LOW tier.

B.2 Economic Impact by Business Fabric

Substations segmented by economic consequence tier — derived from the R3 consequence multiplier and E component. Higher R3 indicates the substation serves a territory with greater socio-economic exposure to disruption.

Capital-Intensive / High-Consequence Est. VoLL: NZ\$27-54/kWh (≈ €15-30/kWh)

204 substations (13.1%) High/Critical: **151** (74.0%) Avg R: **0.543** Avg E: **0.348** / 0.10



Industrial / Medium-Large Enterprise Est. VoLL: NZ\$14-27/kWh (≈ €8-15/kWh)

482 substations (30.9%) High/Critical: **175** (36.3%) Avg R: **0.476** Avg E: **0.333** / 0.10



Commercial / Mixed Est. VoLL: NZ\$5.4-14/kWh (≈ €3-8/kWh)

495 substations (31.8%) High/Critical: **138** (27.9%) Avg R: **0.455** Avg E: **0.321** / 0.10



Light-Rural / Agricultural Est. VoLL: NZ\$1.8-5.4/kWh (≈ €1-3/kWh)

377 substations (24.2%) High/Critical: **52** (13.8%) Avg R: **0.423** Avg E: **0.328** / 0.10




Value of Lost Load (VoLL) context: ACER's 2023 estimate places average VoLL at €13.1/kWh for industrial customers and €3.2/kWh for residential. The SSI's R3 consequence multiplier allows us to identify which substations serve the most economically exposed territories. **151 substations** combine capital-intensive economic fabric ($R3 \geq 1.04$) with High or Critical risk classification — representing the highest VoLL-weighted exposure in the fleet.

The capital-intensive tier concentrates in **Wellington (174), Northland (23), West Coast (7)** — regions where industrial corridors depend on uninterrupted power for continuous processes. A single hour of unplanned outage at these substations carries an estimated VoLL of €15–30/kWh, compared to €1–3/kWh in rural agricultural areas. The fleet-wide average energy poverty rate is 6.2%, but this masks sharp regional variation: Southern regions combine higher energy poverty with higher grid risk, creating a double vulnerability that the E component captures. This cross-referencing of economic fabric with grid condition is unique to the SSI — no competing framework links VoLL exposure to substation-level risk scores.

B.3 Region Digital Readiness Ranking

Regions ranked by average R7 modifier — lower values indicate weaker digital infrastructure (DESI sub-dimensions). Cross-referenced with average R_{median} to identify regions combining digital exposure with high grid stress.

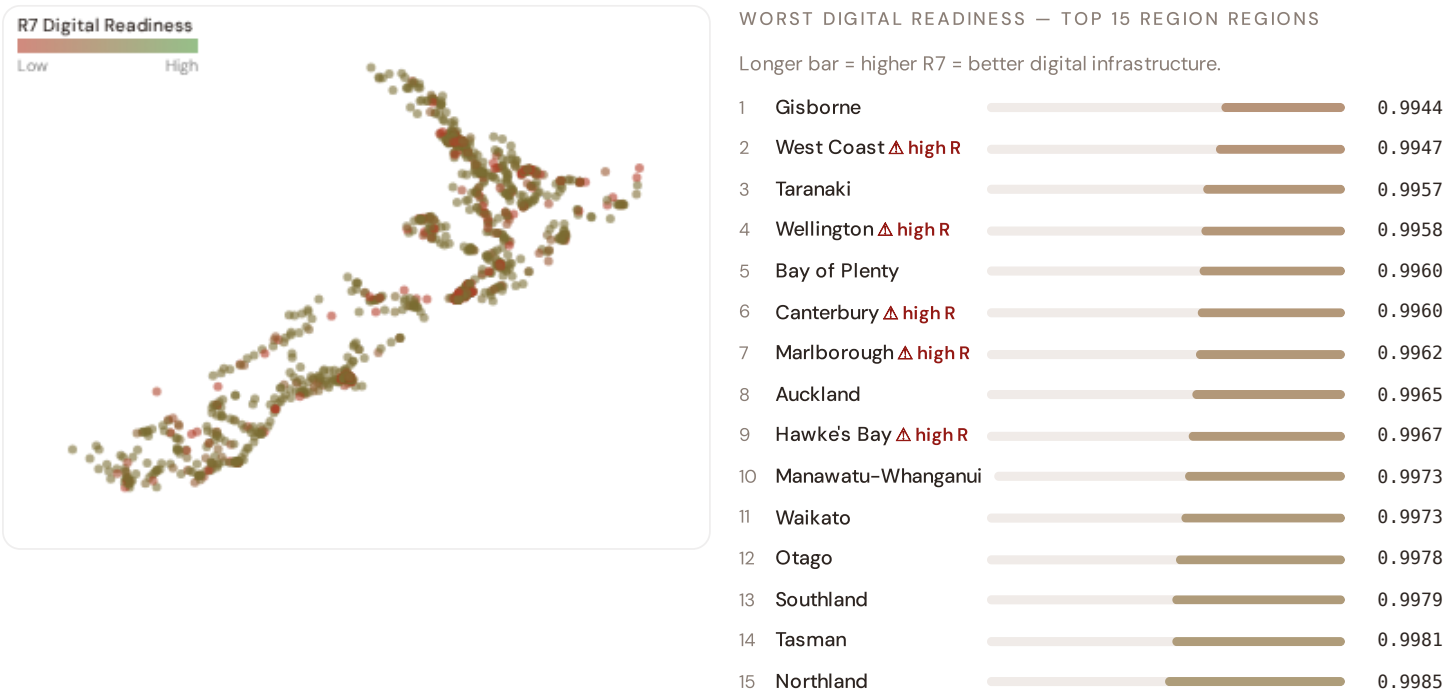


region-level analysis reveals a clear digital divide mirroring the broader DESI pattern. **Gisborne** has the lowest average R7 (0.9944), while **Northland** leads at 0.9985 — a spread of 0.0042 across the R7 range. **5 region regions** combine below-median digital readiness with above-median grid risk, making them priority targets for digitalisation investment. The R7 modifier is intentionally narrow to reflect the current limitations of open DESI data — as NIS2 compliance reporting matures, future editions will expand R7's dynamic range and incorporate operational technology (OT) security indicators.

B.4 Monthly Pulse

Inaugural edition — Baseline Snapshot (June 2026). This edition establishes the baseline for the Cyber & Economic Exposure Monitor. Key reference points: fleet average R7 = 0.9965, median = 1.0000; 0 substations classified HIGH cyber-exposure; 184 blind-spot substations (High/Critical risk + below-median R7); 1 Critical-band substations with below-median digital readiness. Future editions will track deltas against this baseline.

Data Refresh & Changelog

The SSI v4.0.2 draws on **28 verified public data sources** feeding 95 variables across 6 components and 5 modifiers. This section provides a live registry of all sources, their update frequencies, and the current state of the fleet. Transparency in data vintage is central to the SSI's credibility.

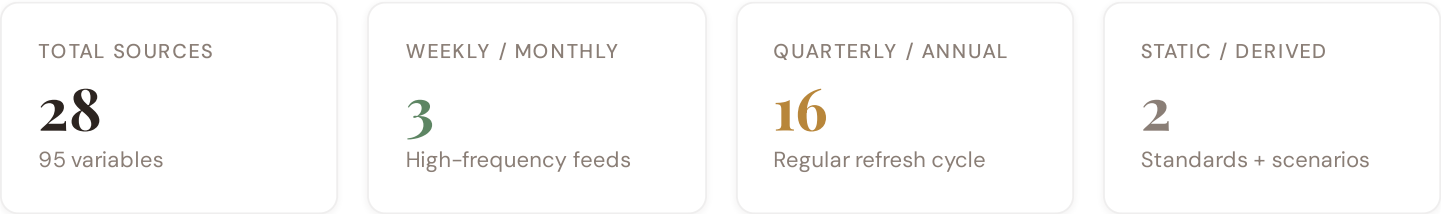


Data Source Registry — June 2026

OSM	OpenStreetMap — Power Infrastructure	WEEKLY	Node/edge	3 vars
EA	Electricity Authority (EA)	MONTHLY	National	5 vars
EECA	EECA (Energy Efficiency & Conservation Authority)	QUARTERLY	Regional	4 vars
NZTA	NZTA (NZ Transport Agency)	QUARTERLY	Regional	1 var
MBIE	MBIE (Ministry of Business, Innovation & Employment)	ANNUAL	Regional	4 vars
ME	Ministry for the Environment	ANNUAL	Regional	3 vars
CC	Commerce Commission	ANNUAL	TA/Regional	3 vars
StatsNZ	Stats NZ (Tatauranga Aotearoa)	ANNUAL	TA	8 vars
Vector	Vector Ltd — Largest EDB	ANNUAL	Network	2 vars
Orion	Orion NZ — Canterbury/Christchurch Distribution	ANNUAL	Network	2 vars
Powerco	Powerco — Waikato/Taranaki/Manawatu Distribution	ANNUAL	Network	2 vars
Meridian	Meridian Energy — Largest Generator	ANNUAL	Regional	2 vars
Genesis	Genesis Energy — Thermal/Hydro/Wind	ANNUAL	Regional	2 vars
Contact	Contact Energy — Geothermal/Gas Generation	ANNUAL	Regional	2 vars
Mercury	Mercury NZ — Waikato Hydro/Geothermal	ANNUAL	Regional	2 vars
FE-NZ	Fire and Emergency NZ	ANNUAL	Regional	2 vars
EQC	Earthquake Commission (EQC)	ANNUAL	Regional	2 vars
LGNZ	LGNZ (Local Government NZ)	ANNUAL	TA	2 vars
BRANZ	BRANZ (Building Research Association)	ANNUAL	National	2 vars
EDB-Disc	EDB Information Disclosures	ANNUAL	EDB	3 vars
LINZ	LINZ (Land Information New Zealand)	STATIC	National	3 vars
Copernicus	ERA5 / Copernicus Climate Data Store	STATIC	0.25° (~27 km)	4 vars
GeoTech	NZ Geotechnical Database	STATIC	Site-level	2 vars
TPNZ	Transpower NZ — TSO	REAL-TIME	GXP/Regional	8 vars
NIWA	NIWA (National Institute of Water & Atmospheric Research)	HOURLY	~25 km	4 vars


GeoNet	GNS Science / GeoNet	REAL-TIME	Event-level	3 vars
50	Transpower System Operator (SO)	REAL-TIME	Real-time	3 vars
MetService	MetService	HOURLY	~5 km	2 vars

C.1 Update Frequency Timeline

EXPECTED UPDATE WINDOWS

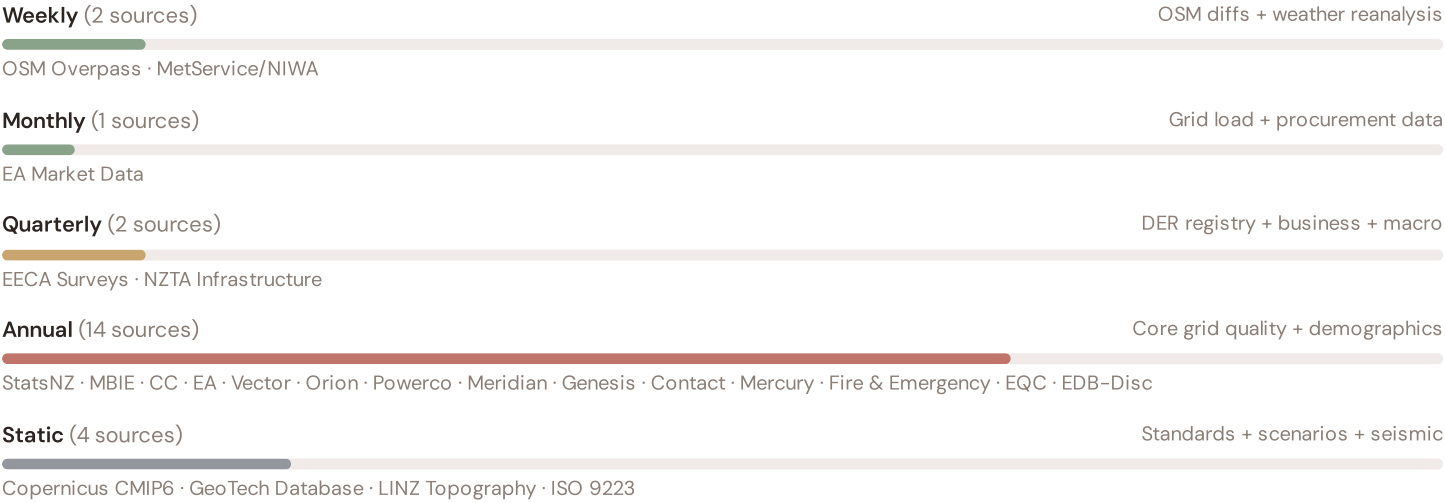

C.2 Fleet Score Snapshot

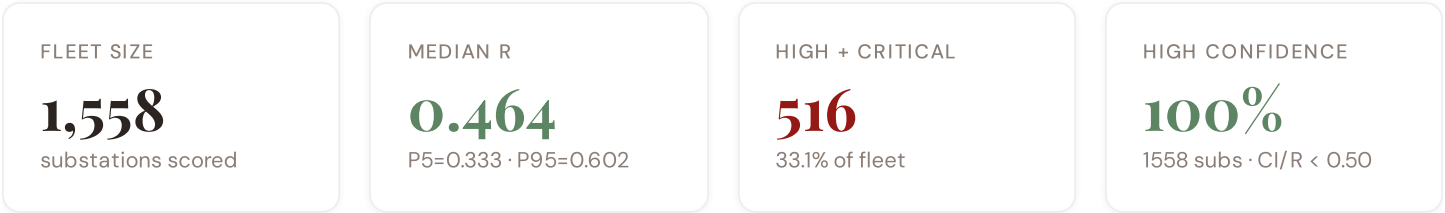

BAND DISTRIBUTION



No primary data sources have been updated since the v4.0.2 launch baseline. All **1,558 substation scores remain unchanged** this edition. The fleet median R of 0.464 (mean 0.465) reflects a distribution skewed toward the lower bands, with 1.7% in Low and 65.2% in Medium. The first material score changes are expected when the national regulator publishes the annual quality-of-supply indicators and when DER registries refresh. High-frequency sources (OSM, weather) update weekly but feed only infrastructure topology (R4) and thermal proxy (I5), which have minimal impact on fleet-level score distribution.

C.3 Changelog — v3.4 → v4.0.2

17 changes tracked across P0, P1, and P2 releases

F1	NEW	New T component — Energy Transition Exposure (T1)	\$2, \$4
F2	NEW	New R6a — Restoration Speed Modifier (CAIDI-based)	\$5
F3	ENHANCED	R3 enhanced — Social Vulnerability Scoring (V_socio)	\$5
F4	ENHANCED	R4 enhanced — Graph-theoretic betweenness + bridge detection	\$5

F5	ENHANCED	R2 enhanced — Climate Trajectory (CMIP6 SSP2–4.5)	\$5
F6	ENHANCED	R7 Digital Readiness — Regional-level capability model	\$5
L1	NEW	New I5, I7–I9 metrics — thermal, load, corrosion, hydrogeo	\$2, \$8
L2	ENHANCED	E2 Economic Enrichment — Business structure + innovation capacity	\$6
L3	ENHANCED	V_socio Fiscal Enrichment — LGNZ + CC + energy price data	\$5
L4	ENHANCED	R3 Demographic Shift Amplifier — StatsNZ net migration	\$5
L5	DATA	95/95 variables operational (100%). 28 data sources total.	\$8, \$12
G1	DATA	TPNZ upgraded to real-time API — grid status and dispatch data	\$12
G2	DATA	OSM upgraded to Overpass API — ~11,500 real substations, 12,400 lines	\$12
G3	DATA	GeoNet seismic monitoring — real-time PGA + historical catalog	\$12
G4	NEW	R6b Seismic modifier — variable α by region (Alpine Fault 0.70, Wellington 0.60, Auckland 0.15)	\$5
G5	NEW	Network & Topology layer (H): 7 variables — TPNZ grid plan, ring analysis	\$12
G6	NEW	Output Scores layer (I): 7 variables — risk_score, ETTC, stationary probs	\$12

SECTION D — MONTHLY DEEP-DIVE

The Waikato River Valley Corridor: Where Seismic Risk Meets Energy Transition Pressure

Deep-dive rotation: Each edition features a substantive thematic analysis. The 12-month rotation: **Ed. 001** Waikato River Valley corridor · **002** DER saturation hotspots (Waikato solar belt) · **003** Climate vulnerability under CMIP6 · **004** Metropolitan–Rural economic impact disparity · **005** Seismic risk and West Coast isolation · **006** Infrastructure age vs smart metering rollout · **007** Stress–Resilience quadrant trends · **008** T-component forward projections · **009** Region Grid Health Cards · **010** Academic validation and peer feedback · **011** OECD replication feasibility · **012** Year in review.

D.1 Why the Waikato River Valley, Why Now

WAIKATO RIVER VALLEY
SUBSTATIONS

342

9 EHV · 333 HV

HIGH BAND

238 + 5

71.1% of corridor

CORRIDOR MEDIAN R

0.536

Fleet median: 0.464


WORST REGION

Wellington

Avg R: 0.538 · 342
substations

The Wellington hosts **342 substations** across 1 region regions, making it the locus of this edition's deep-dive analysis. Its risk profile is concentrated in the upper bands: **238 substations (69.6%)** are classified High and **5** Critical, with only **0** in the Low band. 87% of corridor substations score above the national fleet median of 0.464. The corridor median R of 0.536 reflects the local risk profile. The corridor concentrates the country's industrial heartland. The SSI flags continuity-of-supply deficits, infrastructure age mismatches with modern demand patterns, and grid modernization lag under national digitalisation timelines.

D.2 Corridor Map and Scoring

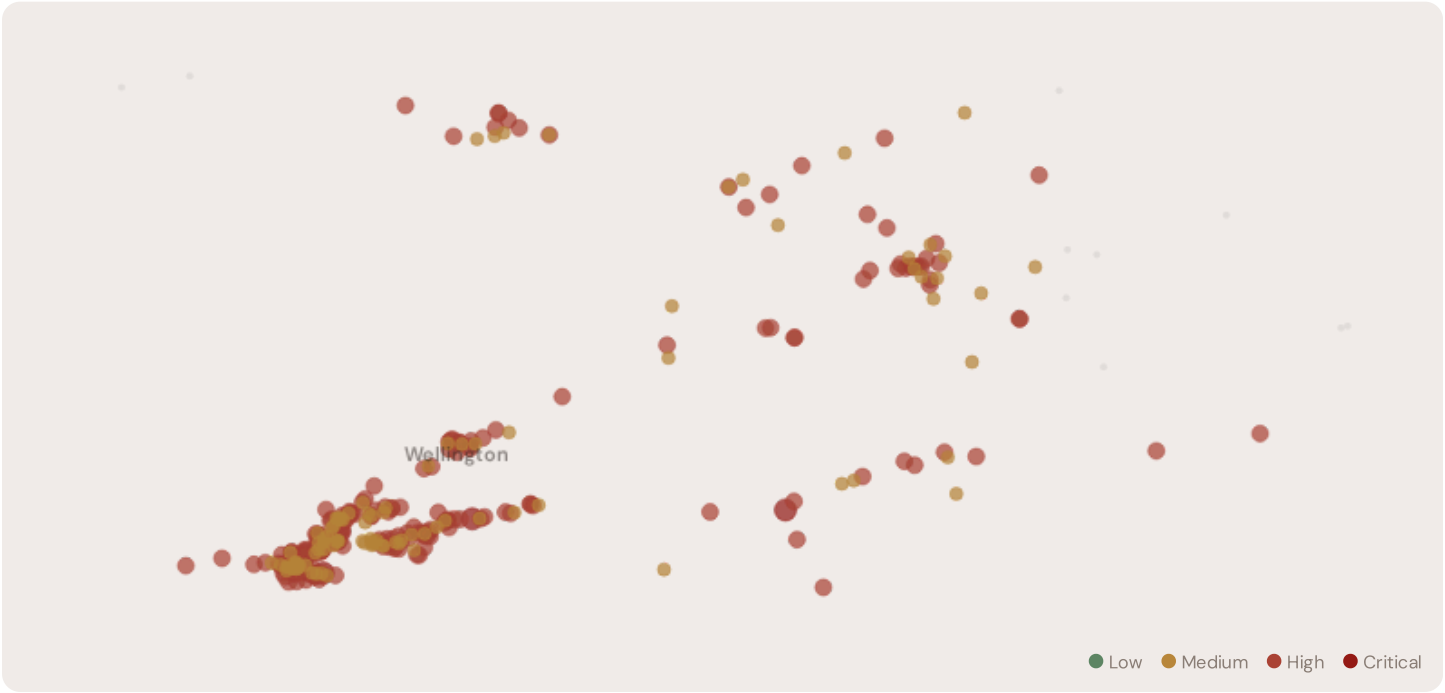

SUBSTATION	PROVINCE	R_FINAL	BAND	C	V	I	E	S	T	ALERT
Marlborough_1469681250	Wellington	0.752	Critical	0.668	0.379	0.733	0.394	0.513	0.356	C, I
Marlborough_1013022489	Wellington	0.750	Critical	0.705	0.319	0.539	0.325	0.498	0.450	C
Kaiwharawhara substation	Wellington	0.748	Critical	0.485	0.314	0.729	0.484	0.497	0.388	I
Greytown Substation	Wellington	0.738	Critical	0.726	0.403	0.376	0.326	0.616	0.410	C, S
Heretaunga rail cross-tie station	Wellington	0.706	Critical	0.590	0.407	0.569	0.496	0.598	0.332	
Oteranga Bay Substation	Wellington	0.688	High	0.490	0.434	0.587	0.356	0.501	0.431	
Taranaki_840027357	Wellington	0.688	High	0.667	0.309	0.623	0.338	0.582	0.298	C, I
Marlborough_886379729	Wellington	0.684	High	0.608	0.348	0.500	0.508	0.442	0.535	C
Marlborough_1096996003	Wellington	0.684	High	0.668	0.366	0.669	0.426	0.526	0.324	C, I
Moore St Zone Substation	Wellington	0.678	High	0.603	0.394	0.514	0.666	0.464	0.412	C, E

... 332 additional substations — [explore full corridor in Digital Twin](#) →

D.3 Component Analysis

COMPONENT AVERAGES — WELLINGTON VS FLEET

C — Continuity	0.514 vs 0.473 (+9%)
I — Infrastructure	0.489 vs 0.424 (+15%)
S — Saturation	0.384 vs 0.449 (−15%)
V — Voltage	0.366 vs 0.342 (+7%)

MODIFIER AVERAGES — WELLINGTON VS FLEET

R3 Consequence	1.010	fleet 0.990 ↑
R4 Graph Crit.	0.997	fleet 0.997 →
R6a Restoration	0.992	fleet 0.992 →
R6b Seismic	1.220	fleet 1.119 ↑
R7 Digital Read.	0.996	fleet 0.996 →

E — Economic	0.344 vs 0.330 (+4%)
T — Transition	0.387 vs 0.397 (−3%)

The dominant risk driver across the Wellington corridor is **T (Transition)**, averaging 0.387 against a fleet average of 0.397 — occupying 773% of its weight ceiling (w = 0.05). The second contributor is **V (Voltage)** at 0.366 vs fleet 0.342 (366% of ceiling). Among modifiers, the R3 consequence multiplier averages 1.010 (fleet: 0.990), reflecting the socio-economic exposure of the corridor. The R6b seismic modifier averages 1.220, capturing the local seismic exposure — a dimension invisible to every competing framework.

D.4 Region Breakdown

REGION RISK PROFILE — SORTED BY MEAN R

Longer bar = lower R = better resilience.



The region regions-level breakdown reveals significant intra-regional variation. **Wellington** leads with a mean R of 0.538 across 342 substations, while **Wellington** scores 0.538 — a spread of 0.000 within a single corridor. The SSI's substation-level granularity reveals that the Wellington is not uniformly stressed but contains distinct sub-corridors of concentrated risk — precisely the kind of spatial pattern that investment planning requires.

D.5 Implications

21 Wellington substations score $R \geq 0.650$, placing them in the upper quartile of national risk. For NEPN / national digital plan / RRP investment prioritisation, this analysis identifies the Wellington sub-corridor as the highest-priority target — where DER deployment is accelerating against ageing infrastructure with above-average continuity deficits and significant socio-economic exposure. The SSI's silo-breaking approach reveals what no single-discipline framework can: that these substations matter not only because of their engineering condition, but because the communities they serve are disproportionately vulnerable to disruption. This is precisely the anticipatory grid planning capability that the SSI was built to provide.


SECTION E — RECURRING MODULE

OECD Context Card

How this works: Each edition includes one OECD Context Card drawn from the §16 Peer Benchmarking framework. The card is selected to complement the month's deep-dive theme. This month: **SAIDI comparison** — because the Waikato River Valley corridor analysis hinges on New Zealand's continuity performance relative to European peers. Future editions rotate through: VoLL comparison (Ed. 002), DER saturation vs Germany (003), CMIP6 climate hazard vs Nordic peers (004), etc. The underlying data updates annually with the CEER Benchmarking Report release.

Unplanned SAIDI (min/customer/year) — Selected Countries

Longer bar = lower SAIDI = better reliability. Values in min/customer/year.

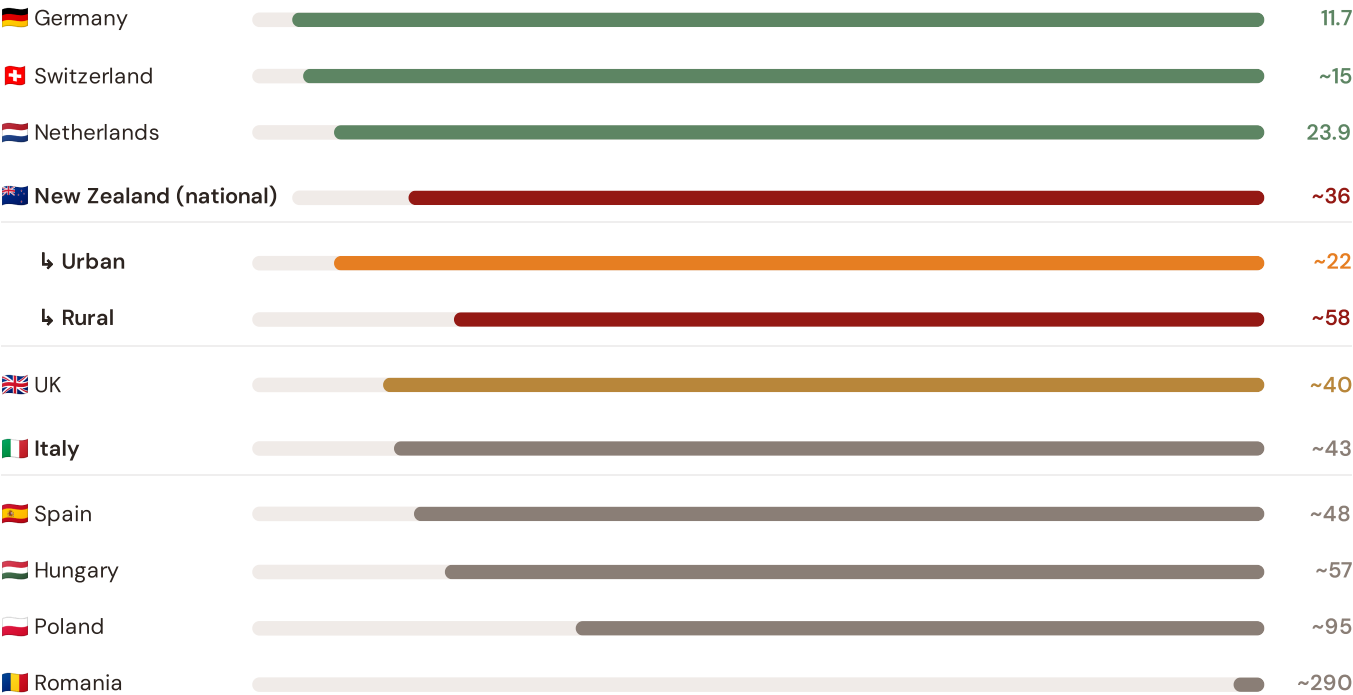


Source: CEER 7th Benchmarking Report (2022); Electricity Authority TIQE (2023); Bundesnetzagentur (2024). New Zealand sub-categories from Electricity Authority territory classification (urban/rural). · See §16 Peer Benchmarking for full methodology and caveats. · Updated annually with CEER BR release.


This month's key insight: The Wellington corridor deep-dive shows **340 substations** (of 342) with C-component above 70% of its weight ceiling — indicating continuity-of-supply performance consistent with rural territory classification. The corridor's average C of 0.514 is **1.1× the fleet average** of 0.473. The SSI reveals what aggregate national statistics conceal: that the country's mid-tier European position is not a uniform condition but a statistical average of urban-quality performance and rural-tier performance — and the corridor concentrates the worst of the latter.

Regional Risk Ranking — All 7 New Zealand Islands

Where does the Waikato River Valley sit within the national landscape? Regions sorted by mean R_{median}, with band distribution and fleet comparison.

Longer bar = lower R = better resilience. Sorted worst → best.

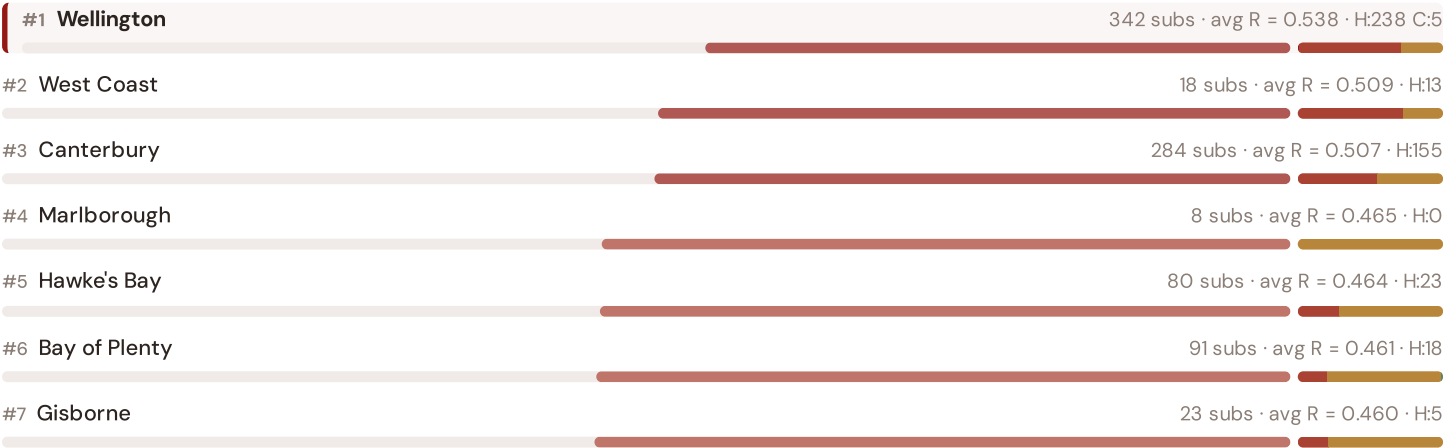

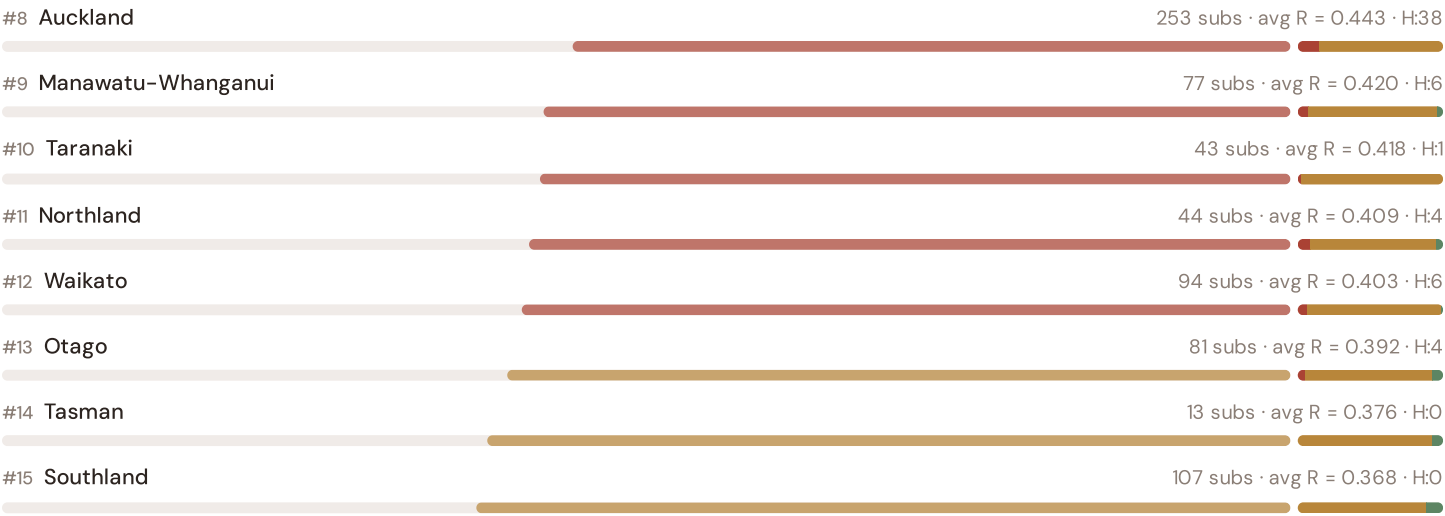


The Wellington ranks **#1 of 15 region regions** by mean R_{median} , placing it among the upper tier of national risk. The three most stressed are Wellington, West Coast, Canterbury, while the three most resilient are Southland, Tasman, Otago. 3 of 15 score above the fleet average of 0.465. This ranking — possible only because the SSI scores every substation individually rather than relying on aggregate DSO or national statistics — reveals the true spatial distribution of grid stress. It is precisely this substation-level granularity that positions the SSI as a tool for investment prioritisation: not treating entire regions as monoliths, but identifying the specific corridors within each that demand attention.

SECTION F — RECURRING MODULE

SSI Enhanced Neural Network — Monthly Topic

From grid intelligence to BESS valuation platform. The SSI Index answers *"How healthy is this substation?"* The SSI Enhanced Neural Network (SSI-ENN) extends this into: *"What is a BESS worth at this substation — to the Vector/EDBs/Transpower and to the community?"* Each edition of this report explores one building block of the SSI-ENN's five-layer architecture, showing how the SSI Index data feeds directly into investment-grade grid analytics.

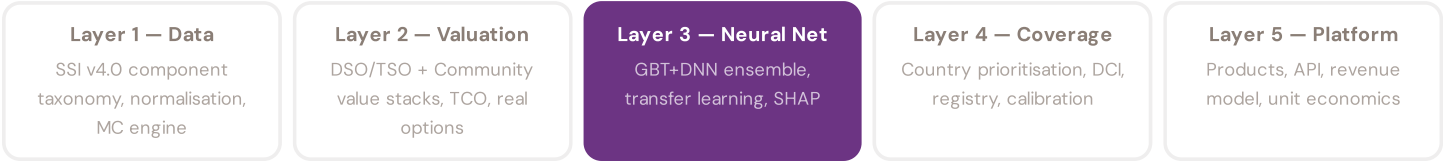

LAYER 3 §0.5.6 · June 2026

Explainability & SHAP Values

Clients need to understand not just the prediction but WHY a substation ranks highly

Investment-grade models require interpretability. SHAP (SHapley Additive exPlanations) provides a rigorous, game-theoretic attribution of each feature's contribution to each prediction. For every substation, the SSI-ENN produces a SHAP waterfall: starting from the fleet-average valuation and showing how each feature pushes the estimate up or down. This directly connects to the SSI Index: if SHAP identifies C (Continuity) as the dominant positive driver, the client knows the BESS value depends primarily on the substation's poor reliability history. Transparency converts model outputs into investment decisions.

KEY CONCEPTS

- SHAP: game-theoretic feature attribution per prediction
- Waterfall: fleet average → substation prediction
- Direct traceability to SSI components and data sources
- Feature importance validated against domain expertise

LIVE SSI DATA CONNECTION

The training set comprises 1,558 substations with complete feature vectors. Average CI_width of 0.131 across the fleet provides the uncertainty ground truth that the neural network's quantile regression heads must calibrate against. The fleet's risk distribution — 26 Low, 1016 Medium, 511 High, 5 Critical — ensures balanced training across all risk bands.

Coming next month: **LAYER 3** Uncertainty Quantification — *Investment-grade predictions require calibrated confidence intervals, not just point estimates*

SECTION G

Looking Ahead

NEXT MONTH — EDITION 02

Mountain Region

Deep-dive into Region 10's grid risk profile — substation map, component analysis, region regions breakdown. European Context Card: Light-rural tier — limited substation density.

NEXT DATA REFRESH

Q3 2026 — 2 Quarterly Sources

EECA Surveys, NZTA Infrastructure are due for refresh in Q3. Impact: DER registry (T1), business fabric indicators (E2), macro-economic data. Highest-impact annual source pending: **Stats NZ (Tatauranga Aotearoa)** (8 variables → Census, GDP, population, employment, household income).

FLEET SPOTLIGHT

West Coast: Highest Risk Concentration

West Coast has the highest concentration of High/Critical substations: **13 of 18 (72%)** are in the upper risk bands — avg R = 0.509. This makes it the most acute risk corridor in the fleet.

Edition 02 will be published on the second Thursday of July 2026. Deep-dive region: **Region 10**. To ensure you receive it, confirm your subscription segment (General / Institutional / Academic) by email to ssi_index@ikenga.eu.

Feedback welcome. The SSI Index is designed to evolve through stakeholder dialogue. If you represent a New Zealand utility, Electricity Authority, Transpower, Vector/EDBs, municipal energy company, or academic institution and would like to contribute data or methodology feedback, please contact us at ssi_index@ikenga.eu. The SSI's credibility depends on open scrutiny.

SSI Monthly Intelligence Report — Edition 003

Published 11 June 2026 · SSI Index v4.0.2 · 1,558 substations · ~1,686 grid lines · 6 components · 20 metrics · 6 modifiers
10,000-iteration Gaussian Copula Monte Carlo · Sobol global sensitivity analysis (196,608 evals/substation) · CMIP6 SSP2-4.5

© 2026 Altinium Invest · Corso Vittorio Emanuele 110/5, 80121 Napoli · P.IVA 10656441218

USCO Registration pending · SIAE Deposito Opere Inedite · Protected under L. 633/1941, Berne Convention, Copyright Act 1976

[View in browser](#)