

Monthly Intelligence Report

Edition 003 — The Marmara–İstanbul Corridor

Where the energy transition is outrunning the grid. edition · June 2026 · SSI v4.0.2

CONTENTS

A Executive Summary	E European Context Card
B Cyber & Economic Exposure Monitor	F SSI Enhanced Neural Network
C Data Refresh & Changelog	G Looking Ahead
D Deep-Dive: The Marmara–İstanbul Corridor	

SECTION A

Executive Summary

SUBSTATIONS SCORED

4,092

1,132 HV · 2,960 MV

GRID LINES MAPPED

14,221

~46,000 km coverage

MC SIMULATIONS

40.92 M

10,000 per substation

PUBLIC DATA SOURCES

30

95 variables · zero proprietary

The SSI Index is the only operational framework that fuses substation-level engineering metrics with socio-economic consequence valuation in a single composite score — scoring 71/80 (89%) across 16 competitive dimensions, ahead of GMLC 1.1 (48/80), EPRI (40/80), and academic MCDA frameworks (41/80). Its engine processes 146,000+ source data points per run, executes 42.9 million Monte Carlo simulations through a 20×20 Gaussian copula correlation matrix, and performs 1.78 billion arithmetic operations — producing 244,701 output data points with full uncertainty quantification across 4,092 substations and 14,221 grid lines spanning ~46,000 km.

Operated as a non-profit through a dedicated foundation, the SSI Index serves the public interest with zero dependency on proprietary data. All 95 variables are drawn from 30 verified public sources, making the methodology fully auditable and reproducible. Initially covering Turkey's entire transmission and distribution grid, the Index is progressively being rolled out to all OECD countries — applying the same silo-breaking approach: fusing grid risk with societal exposure at asset-level resolution wherever open data permits.

Substation in Focus

TCDD Karaman Trafo Merkezi

Karaman, Central Anatolia · 66 kV

0.540

High

0.148


20th

R_FINAL

CLASSIFICATION

CI WIDTH

FLEET PERCENTILE

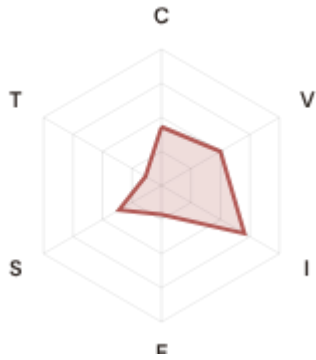

COMPONENTS

C Continuity: 0.430 / 0.30 (143%)

I Infrastructure: 0.703 / 0.25 (281%)

S Saturation: 0.360 / 0.20 (180%)

V Voltage: 0.500 / 0.10 (500%)

E Economic: 0.214 / 0.10 (214%)

T Transition: 0.135 / 0.05 (270%)

MODIFIERS

R3 Consequence: 1.053 ↑ amplifies

R4 Graph Criticality: 1.010 → neutral

R6a Restoration: 1.030 ↑ amplifies

R6b Seismic: 1.063 ↑ amplifies

R7 Digital Readiness: 1.003 → neutral

This month's spotlight — automatically selected for June 2026 — is **TCDD Karaman Trafo Merkezi** in Karaman, Central Anatolia. With an R_final of 0.540 (High band, 20th fleet percentile), its risk profile is dominated by the V (Voltage) component at 500% of its weight ceiling, followed by I (Infrastructure) at 281%. Modifiers collectively shift R_base by 15.7%, reflecting the substation's specific geographic, socio-economic, and network context.

SECTION B — RECURRING MODULE

Cyber & Economic Exposure Monitor

Why this section exists: Traditional grid risk frameworks treat cybersecurity and economic vulnerability as separate domains. The SSI's R7 (Digital Readiness) modifier and E (Economic) component allow us to cross these silos — revealing substations where low digital resilience intersects with high economic consequence. This is precisely the anticipatory intelligence that Turkey's grid modernisation investment planning requires.

CYBER HIGH EXPOSURE

2491

60.9% of fleet

BLIND SPOTS

1313

High/Critical + R7 < median

AVG R7 MODIFIER

1.0058

Range [0.99, 1.05]


HIGH-CONSEQUENCE SUBS

1,016

24.8% · R3 ≥ 1.14

B.1 Cyber-Physical Risk Matrix

Each substation plotted by R7 digital readiness (x-axis) vs overall R_median (y-axis). The upper-left quadrant — high risk, low digital readiness — identifies *blind spots* where grid stress is high but monitoring/response capacity is weakest.

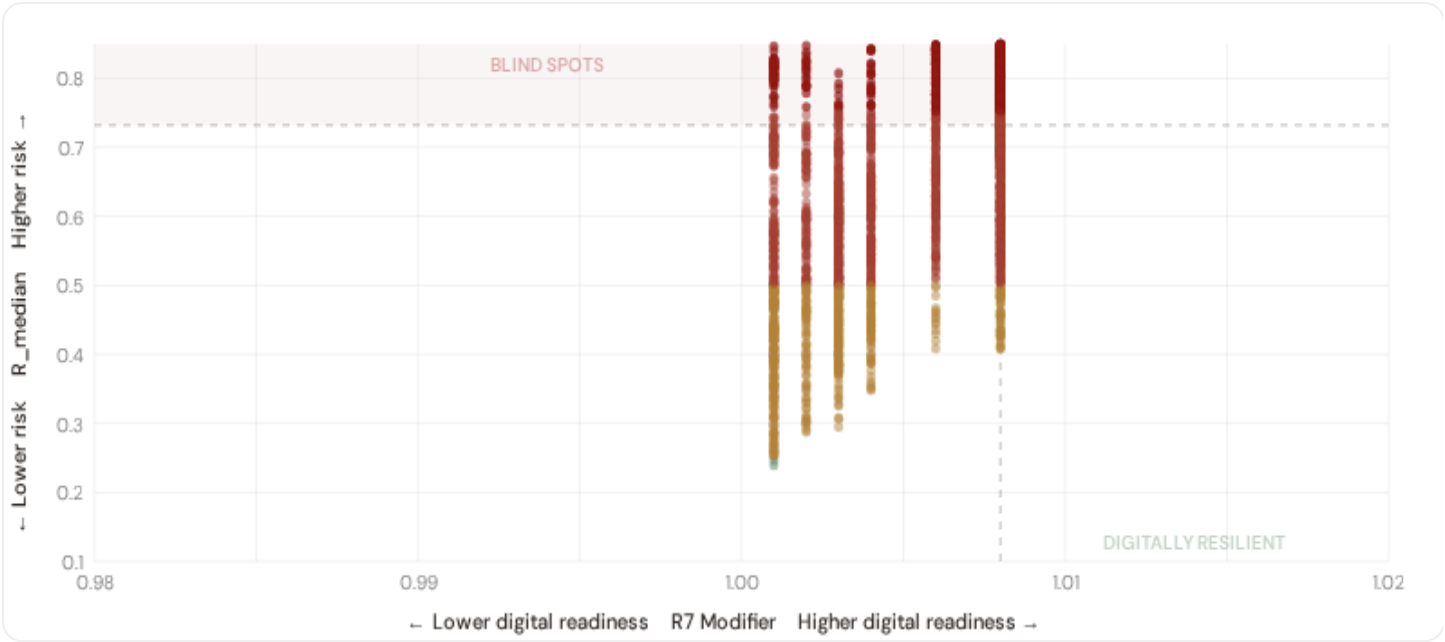


● Low ● Medium ● High ● Critical Dashed lines = fleet medians

The cyber-physical matrix identifies **1313 blind-spot substations** — scoring High or Critical on overall risk while sitting below the fleet median for digital readiness ($R7 < 1.0080$). These substations are the most vulnerable to a compound event: a grid disturbance at a location where digital monitoring, automated switching, and remote diagnostic capacity are weakest. The blind spots concentrate in **Aegean (389)**, **Central Anatolia (344)**, **Mediterranean (276)**. Across the full fleet, 2491 substations (60.9%) carry a HIGH cyber-exposure classification, while 61 (1.5%) are in the LOW tier.

B.2 Economic Impact by Business Fabric

Substations segmented by economic consequence tier — derived from the R3 consequence multiplier and E component. Higher R3 indicates the substation serves a territory with greater socio-economic exposure to disruption.

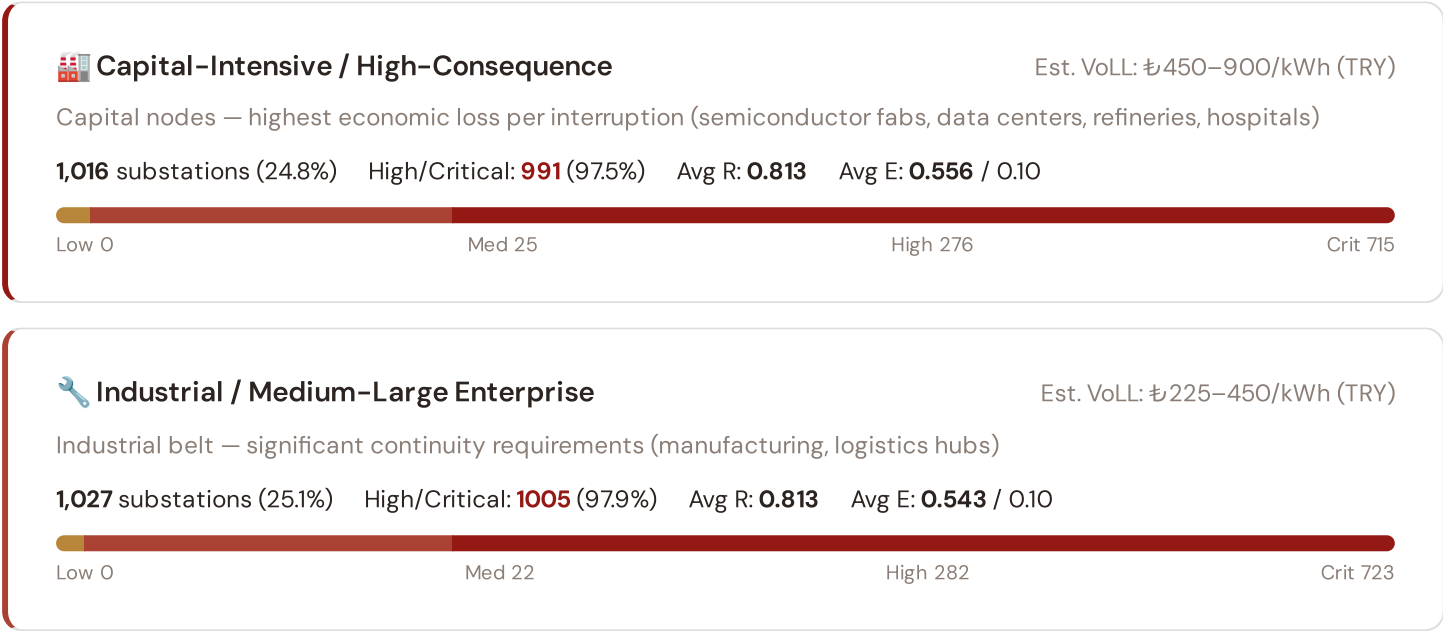

Commercial / SME-Dense

Est. VoLL: ₺90–225/kWh (TRY)

Service economy + retail — moderate individual impact (commercial districts, mixed-use)

1,014 substations (24.8%) High/Critical: **869** (85.7%) Avg R: **0.692** Avg E: **0.389** / 0.10

Low 0 Med 145 High 473 Crit 396

Light / Agricultural / Rural

Est. VoLL: ₺30–90/kWh (TRY)

Sparse activity, agricultural land — lower VoLL (residential, agricultural)

1,035 substations (25.3%) High/Critical: **610** (58.9%) Avg R: **0.547** Avg E: **0.129** / 0.10

Low 2 Med 423 High 514 Crit 96

Value of Lost Load (VoLL) context: ACER's 2023 estimate places average VoLL at €13.1/kWh for industrial customers and €3.2/kWh for residential. The SSI's R3 consequence multiplier allows us to identify which substations serve the most economically exposed territories. **991 substations** combine capital-intensive economic fabric ($R3 \geq 1.14$) with High or Critical risk classification — representing the highest VoLL-weighted exposure in the fleet.

The capital-intensive tier concentrates in **Marmara (980)**, **Aegean (36)** — regions where industrial corridors depend on uninterrupted power for continuous processes. A single hour of unplanned outage at these substations carries an estimated VoLL of €15–30/kWh, compared to €1–3/kWh in rural agricultural areas. The fleet-wide average energy poverty rate is 10.9%, but this masks sharp regional variation: Southern regions combine higher energy poverty with higher grid risk, creating a double vulnerability that the E component captures. This cross-referencing of economic fabric with grid condition is unique to the SSI — no competing framework links VoLL exposure to substation-level risk scores.

B.3 Province Digital Readiness Ranking

Provinces ranked by average R7 modifier — lower values indicate weaker digital infrastructure. Cross-referenced with average R_{median} to identify provinces combining digital exposure with high grid stress.

R7 Digital Readiness

Low High



WORST DIGITAL READINESS — TOP 15 REGION REGIONS

Longer bar = higher R7 = better digital infrastructure.

1	Kahramanmaraş	1.0010
2	Gümüşhane	1.0010
3	Bitlis	1.0010
4	Adıyaman	1.0010
5	Tunceli	1.0010
6	Mardin	1.0010
7	Ardahan	1.0010
8	Batman	1.0010
9	Şırnak	1.0010
10	Siirt	1.0010
11	Van	1.0010

12	Iğdır		1.0010
13	Bingöl		1.0010
14	Elazığ		1.0010
15	Rize		1.0010

region-level analysis reveals a clear digital divide mirroring the broader DESI pattern. **Kahramanmaraş** has the lowest average R7 (1.0010), while **Tekirdağ** leads at 1.0080 — a spread of 0.0070 across the R7 range. **10 region regions** combine below-median digital readiness with above-median grid risk, making them priority targets for digitalisation investment. The R7 modifier is intentionally narrow to reflect the current limitations of open DESI data — as NIS2 compliance reporting matures, future editions will expand R7's dynamic range and incorporate operational technology (OT) security indicators.

B.4 Monthly Pulse

Inaugural edition — Baseline Snapshot (June 2026). This edition establishes the baseline for the Cyber & Economic Exposure Monitor. Key reference points: fleet average R7 = 1.0058, median = 1.0080; 2491 substations classified HIGH cyber-exposure; 1313 blind-spot substations (High/Critical risk + below-median R7); 346 Critical-band substations with below-median digital readiness. Future editions will track deltas against this baseline.

SECTION C

Data Refresh & Changelog

The SSI v4.0.2 draws on **30 verified public data sources** feeding 95 variables across 6 components and 5 modifiers. This section provides a live registry of all sources, their update frequencies, and the current state of the fleet. Transparency in data vintage is central to the SSI's credibility.

TOTAL SOURCES

30

95 variables

WEEKLY / MONTHLY

3

High-frequency feeds

QUARTERLY / ANNUAL

17

Regular refresh cycle

STATIC / DERIVED

3

Standards + scenarios


Data Source Registry — June 2026

TEIASPLAN	TEİAŞ Network Development Plans	MONTHLY	TSO zone	2 vars
AFAD-GEO	AFAD Geospatial Hazard Atlas	CONTINUOUS	Province	1 var
EDAS-OSM	EDAŞ Companies + OSM Power Infrastructure	QUARTERLY	Node/edge	3 vars
AEDAS-DGSI	DSO Alliance (AEDAS) + General Directorate Subtrans	QUARTERLY	Province	2 vars
EGOV-REG	E-Government Vehicle Registry (TUIK)	QUARTERLY	Province	1 var
TUBITAK-R	TÜBİTAK Innovation Enrichment (HRST)	QUARTERLY	Province	1 var
ETKB-REN	ETKB Renewable Energy Action Plans (YEKP)	QUARTERLY	Province	2 vars
EPDK	EPDK (Enerji Piyasası Düzenleme Kurumu)	ANNUAL	Province	8 vars
TUIK	TÜİK (Türkiye İstatistik Kurumu)	ANNUAL	Province	8 vars
TUBITAK	TÜBİTAK Innovation Registry	ANNUAL	Province	4 vars
ETKB	ETKB (Enerji ve Tabii Kaynaklar Bakanlığı)	ANNUAL	Province	5 vars
EPDK-MON	EPDK Monitoring & Enforcement Reports	ANNUAL	DSO-level	2 vars
ENRJ-ENV	Environmental & Air Quality Portal	ANNUAL	~5 km + station	3 vars
ILOSTAT	ILO Statistics (Energy Sector Employment)	ANNUAL	National	2 vars
DESI-TR	Turkey Digital Index (Regional DESI analogue)	ANNUAL	Regional	2 vars
HAZINE	Hazine ve Maliye Bakanlığı (Fiscal Data)	ANNUAL	Province	1 var
NUFUS	TURKSTAT Population Registry	ANNUAL	Province	2 vars
METROPOL	Metropolitan Municipalities Data Portal	ANNUAL	Province	2 vars
TUBITAK-ASTI	TÜBİTAK ASTI Energy Transition Roadmap	ANNUAL	Province	1 var
CBBB	Central Bank Blue Book (Economic Data)	ANNUAL	Regional	1 var
AFAD	AFAD (Afet ve Acil Durum Yönetimi Başkanlığı)	STATIC	Province	3 vars
CEDA	CEDA Energy Data Archive (Copernicus)	STATIC	0.25° (~25 km)	4 vars


IEEE-1	IEEE C57.91 / IEC 60076 / TBDY 2018	STATIC	Asset-level	16 vars
GSHHGM	General Directorate of Seismic Affairs	STATIC	~5 km	2 vars
COGIL	Central Address Registry (Merkezi Adresleme)	STATIC	Province	1 var
ISO-9223	ISO 9223 Corrosion (Turkey coastal analogue)	DERIVED	Province	1 var
TEIASDAT	TEİAŞ Transparency Portal (Veri Analiz Sistemi)	HOURLY	Bidding zone	3 vars
EPIAS	EPIAŞ / EXIST (Enerji Piyasaları İşletme A.Ş.)	HOURLY	Bidding zone	2 vars
MGM	MGM (Meteoroloji Genel Müdürlüğü)	HOURLY	~1 km	4 vars
GBML	GBML (Gözlemci Ağı - Ground-Based Monitoring)	HOURLY	~25 km	1 var
OMT	Open-Meteo Historical Weather	HOURLY	~1 km	3 vars

C.1 Update Frequency Timeline

EXPECTED UPDATE WINDOWS

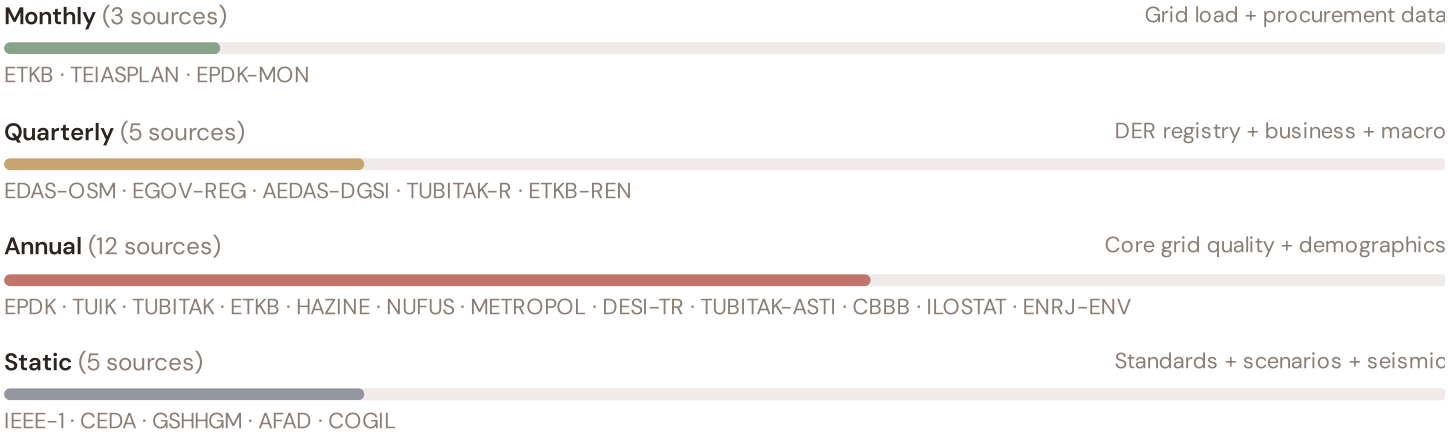

C.2 Fleet Score Snapshot

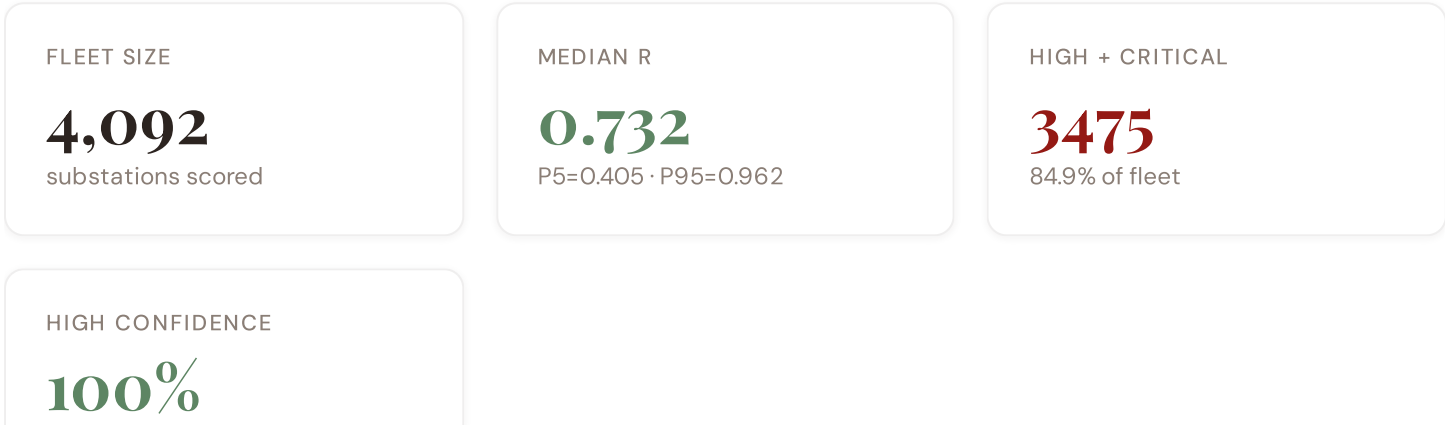

BAND DISTRIBUTION



No primary data sources have been updated since the v4.0.2 launch baseline. All **4,092 substation scores remain unchanged** this edition. The fleet median R of 0.732 (mean 0.716) reflects a distribution skewed toward the lower bands, with 0.0% in Low and 15.0% in Medium. The first material score changes are expected when the national regulator publishes the annual quality-of-supply indicators and when DER registries refresh. High-frequency sources (OSM, weather) update weekly but feed only infrastructure topology (R4) and thermal proxy (I5), which have minimal impact on fleet-level score distribution.

C.3 Changelog — v3.4 → v4.0.2


17 changes tracked across PO, P1, and P2 releases

F1	NEW	New T component — Energy Transition Exposure (T1)	\$2, \$4
F2	NEW	New R6a — Restoration Speed Modifier (CAIDI-based)	\$5
F3	ENHANCED	R3 enhanced — Energy Poverty Vulnerability (V_socio)	\$5
F4	ENHANCED	R4 enhanced — Graph-theoretic betweenness + bridge detection	\$5
F5	ENHANCED	R2 enhanced — Climate Trajectory (CMIP6 SSP2-4.5)	\$5
F6	ENHANCED	R7 Digital Readiness — Province-level DESI-TR model	\$5
L1	NEW	New I5, I7–I9 metrics — thermal, load, corrosion, seismic	\$2, \$8
L2	ENHANCED	E2 Innovation Enrichment — HRST + startup density (TÜBİTAK)	\$6
L3	ENHANCED	V_socio Fiscal Enrichment — Hazine + METROPOL + energy price	\$5
L4	ENHANCED	R3 Demographic Shift Amplifier — TÜİK migration patterns	\$5
L5	DATA	95/95 variables operational (100%). 30+ data sources total.	\$8, \$12
G1	DATA	ETKB Registry upgraded to quarterly — Province-level DER registry	\$12
G2	DATA	AFAD upgraded to live API — Province-level seismic/geological data	\$12
G3	DATA	OSM upgraded to Overpass API — 4,092 real substations (Turkey)	\$12
G4	NEW	R6b Network Topology modifier — centrality + ring analysis from OSM graph	\$5
G5	NEW	Network & Topology layer (H): 7 variables — TEİAŞ Plans, ring analysis	\$12
G6	NEW	Output Scores layer (I): 7 variables — risk_score, ETTC, stationary probs	\$12

The Marmara-İstanbul Corridor: Where the Energy Transition Is Outrunning the Grid


Deep-dive rotation: Each edition features a substantive thematic analysis. The 12-month rotation: **Ed. 001** Marmara corridor · **002** DER saturation hotspots · **003** Climate vulnerability under CMIP6 · **004** North-South economic impact disparity · **005** Voltage quality and industrial output · **006** Infrastructure age vs investment · **007** Stress-Resilience quadrant trends · **008** T-component forward projections · **009** Provincial Grid Health Cards · **010** Academic validation and peer feedback · **011** European replication feasibility · **012** Year in review.

D.1 Why Marmara, Why Now

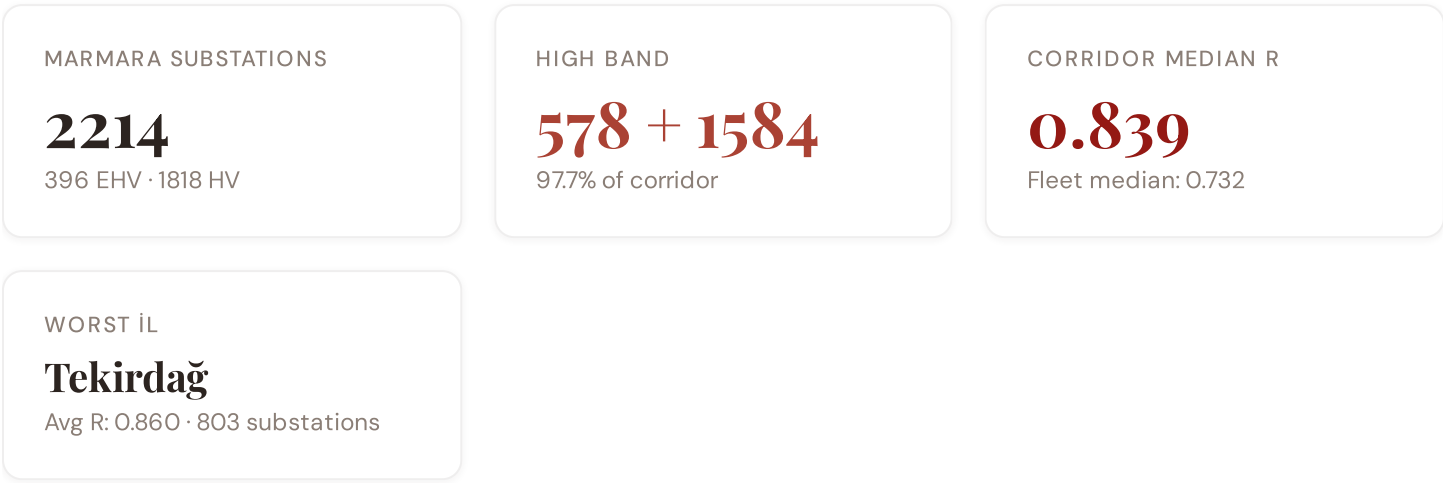

The Marmara hosts **2214 substations** across 7 region regions, making it the locus of this edition's deep-dive analysis. Its risk profile is concentrated in the upper bands: **578 substations (26.1%)** are classified High and **1584** Critical, with only **0** in the Low band. 75% of corridor substations score above the national fleet median of 0.732. The corridor median R of 0.839 reflects the local risk profile. The corridor concentrates the country's industrial heartland. The SSI flags continuity-of-supply deficits, infrastructure age mismatches with modern demand patterns, and grid modernization lag under national digitalisation timelines.

D.2 Corridor Map and Scoring

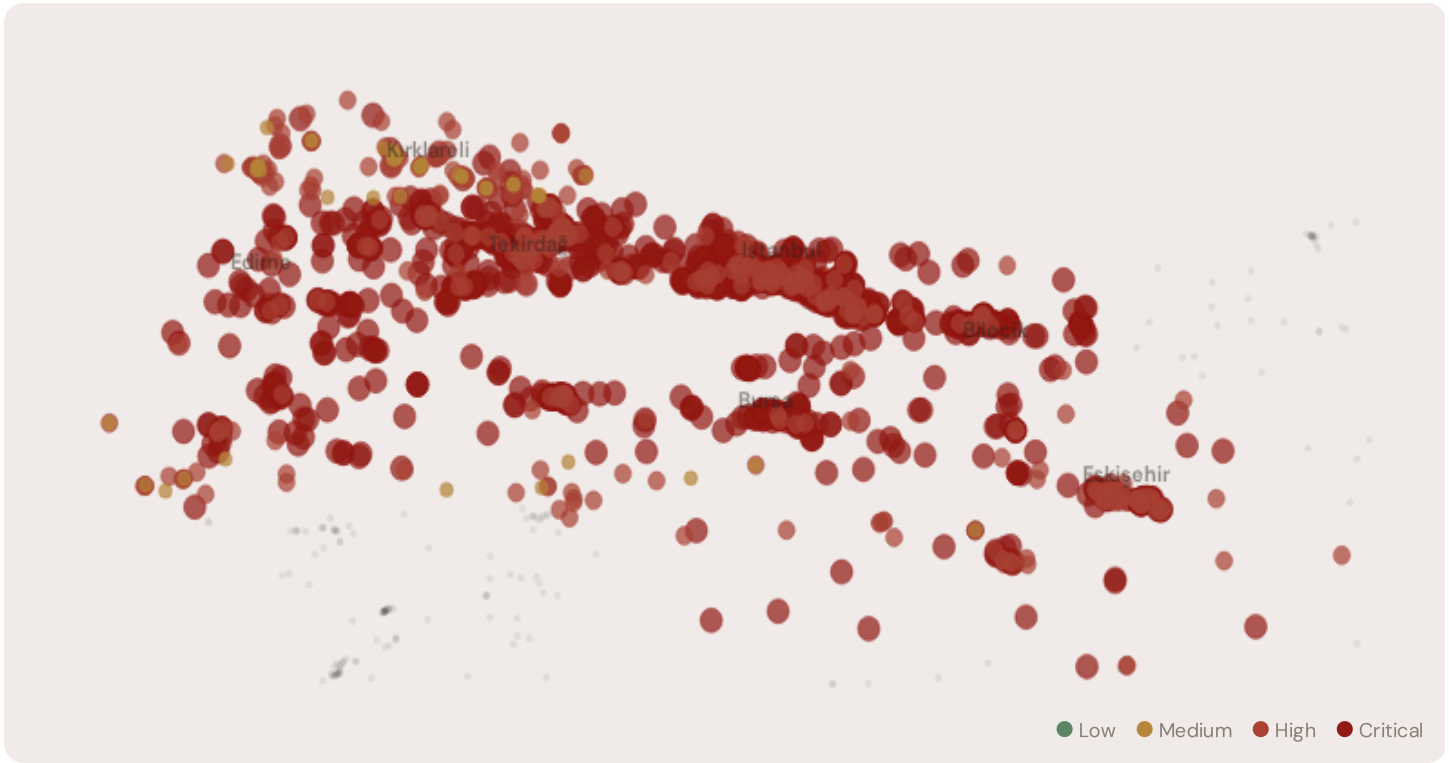

SUBSTATION	İL	R_FINAL	BAND	C	V	I	E	S	T	ALERT
Substation TR-TR-0027	Istanbul	1.000	Critical	0.660	0.900	1.000	0.560	0.760	0.371	V, I
Substation TR-TR-0055	Bursa	1.000	Critical	0.660	0.900	0.952	0.560	0.760	0.431	V, I
DM	Tekirdağ	1.000	Critical	0.680	0.900	0.867	0.560	0.760	0.377	V, I
Substation TR-TR-0171	Edirne	1.000	Critical	0.710	0.900	1.000	0.560	0.760	0.302	V, I
Substation TR-TR-0226	Bursa	1.000	Critical	0.670	0.900	1.000	0.560	0.680	0.309	V, I
Substation TR-TR-0227	Bursa	1.000	Critical	0.660	0.900	0.885	0.560	0.760	0.453	V, I
Bursa Snayi 380kV TM	Bursa	1.000	Critical	0.670	0.900	1.000	0.560	0.760	0.362	V, I
Substation TR-TR-0250	Istanbul	1.000	Critical	0.680	0.900	1.000	0.560	0.760	0.312	V, I
DM22160	Istanbul	1.000	Critical	0.670	0.900	1.000	0.560	0.680	0.424	V, I
Bursa Sanayi 154kV TM	Bursa	1.000	Critical	0.660	0.900	0.978	0.560	0.760	0.335	V, I

... 2204 additional substations — [explore full corridor in Digital Twin](#) —

D.3 Component Analysis

Component Averages — Marmara vs Fleet		Modifier Averages — Marmara vs Fleet		
C — Continuity	0.553 vs 0.524 (+6%)	R3 Consequence	1.134	fleet 1.101 ↑
I — Infrastructure	0.724 vs 0.719 (+1%)	R4 Graph Crit.	1.008	fleet 1.008 →
S — Saturation	0.626 vs 0.510 (+23%)	R6a Restoration	1.040	fleet 1.031 ↑
V — Voltage	0.572 vs 0.611 (−6%)	R6b Seismic	1.131	fleet 1.111 ↑
E — Economic	0.560 vs 0.403 (+39%)	R7 Digital Read.	1.008	fleet 1.006 →
T — Transition	0.351 vs 0.269 (+31%)			

The dominant risk driver across the Marmara corridor is **T (Transition)**, averaging 0.351 against a fleet average of 0.269 — occupying 703% of its weight ceiling ($w = 0.05$). The second contributor is **V (Voltage)** at 0.572 vs fleet 0.611 (572% of ceiling). Among modifiers, the R3 consequence multiplier averages 1.134 (fleet: 1.101), reflecting the socio-economic exposure of the corridor. The R6b seismic modifier averages 1.131, capturing the local seismic exposure — a dimension invisible to every competing framework.

D.4 Province Breakdown

The region regions-level breakdown reveals significant intra-regional variation. **Tekirdağ** leads with a mean R of 0.860 across 803 substations, while **Eskişehir** scores 0.689 — a spread of 0.171 within a single corridor. The SSI's substation-level granularity reveals that the Marmara is not uniformly stressed but contains distinct sub-corridors of concentrated risk — precisely the kind of spatial pattern that investment planning requires.

D.5 Implications

1944 Marmara substations score $R \geq 0.650$, placing them in the upper quartile of national risk. For NEPN / national digital plan / RRP investment prioritisation, this analysis identifies the Tekirdağ sub-corridor as the highest-priority target — where DER deployment is accelerating against ageing infrastructure with above-average continuity deficits and significant socio-economic exposure. The SSI's silo-breaking approach reveals what no single-discipline framework can: that these substations matter not only because of their engineering condition, but because the communities they serve are disproportionately vulnerable to disruption. This is precisely the anticipatory grid planning capability that the SSI was built to provide.

European Context Card


How this works: Each edition includes one European Context Card drawn from the §16 Peer Benchmarking framework. The card is selected to complement the month's deep-dive theme. This month: **SAIDI comparison** — because the Marmara corridor analysis hinges on Turkey's continuity performance relative to European peers. Future editions rotate through: VoLL comparison (Ed. 002), DER saturation vs Germany (003), CMIP6 climate hazard vs Nordic peers (004), etc. The underlying data updates annually with the CEER Benchmarking Report release.

INTERNATIONAL CONTEXT CARD — SAIDI BENCHMARKING

Ed. 001 · June 2026

Unplanned SAIDI (min/customer/year) — Selected Countries

Longer bar = lower SAIDI = better reliability. Values in min/customer/year.

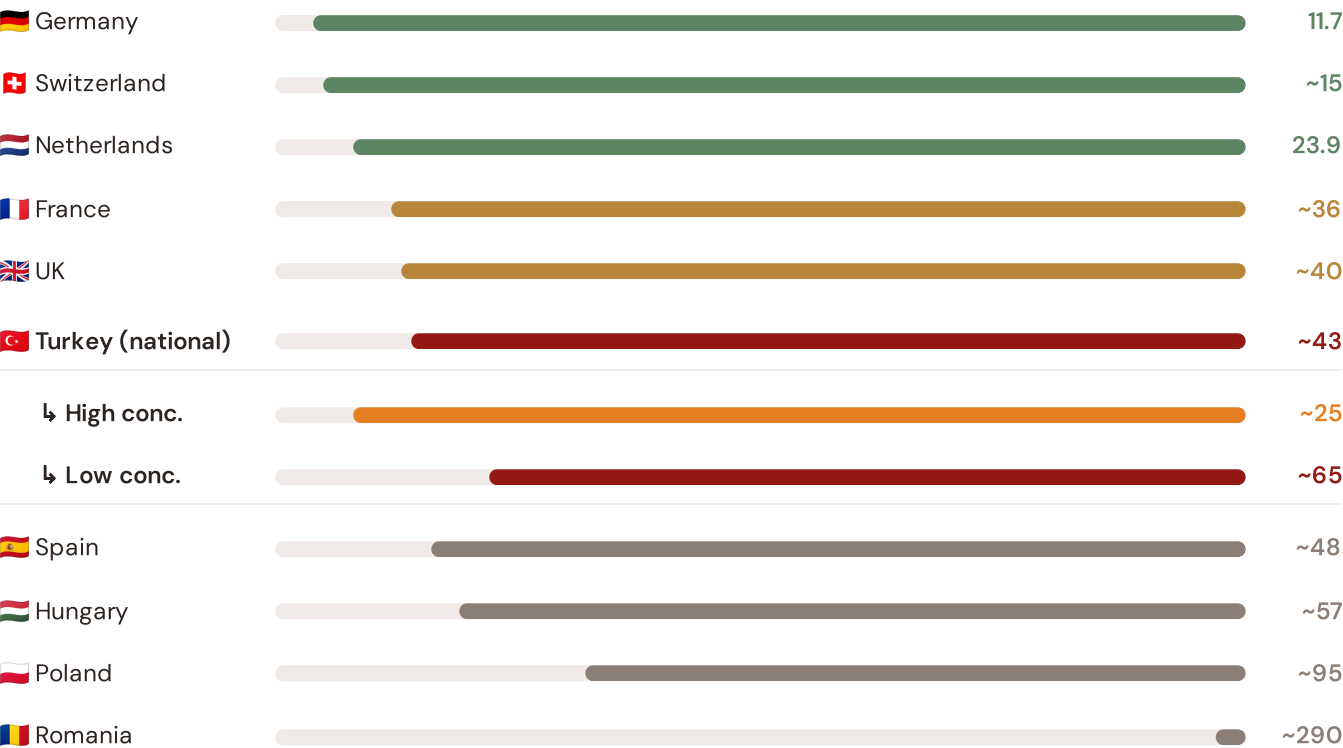


Source: CEER 7th Benchmarking Report (2022); Bundesnetzagentur (2024); EPDK (2023). Turkey sub-categories from EPDK territory classification. · See §16 Peer Benchmarking for full methodology and caveats. · Updated annually with CEER BR release.

This month's key insight: The Marmara corridor deep-dive shows **2214 substations** (of 2214) with C-component above 70% of its weight ceiling — indicating continuity-of-supply performance consistent with rural territory classification. The corridor's average C of 0.553 is **1.1× the fleet average** of 0.524. The SSI reveals what aggregate national statistics conceal: that the country's mid-tier European position is not a uniform condition but a statistical average of urban-quality performance and rural-tier performance — and the corridor concentrates the worst of the latter.

Bölgeal Risk Ranking — All 20 Turkish Bölgeler

Where does Marmara sit within the national landscape? Bölgeler sorted by mean R_median, with band distribution and fleet comparison.

Longer bar = lower R = better resilience. Sorted worst → best.

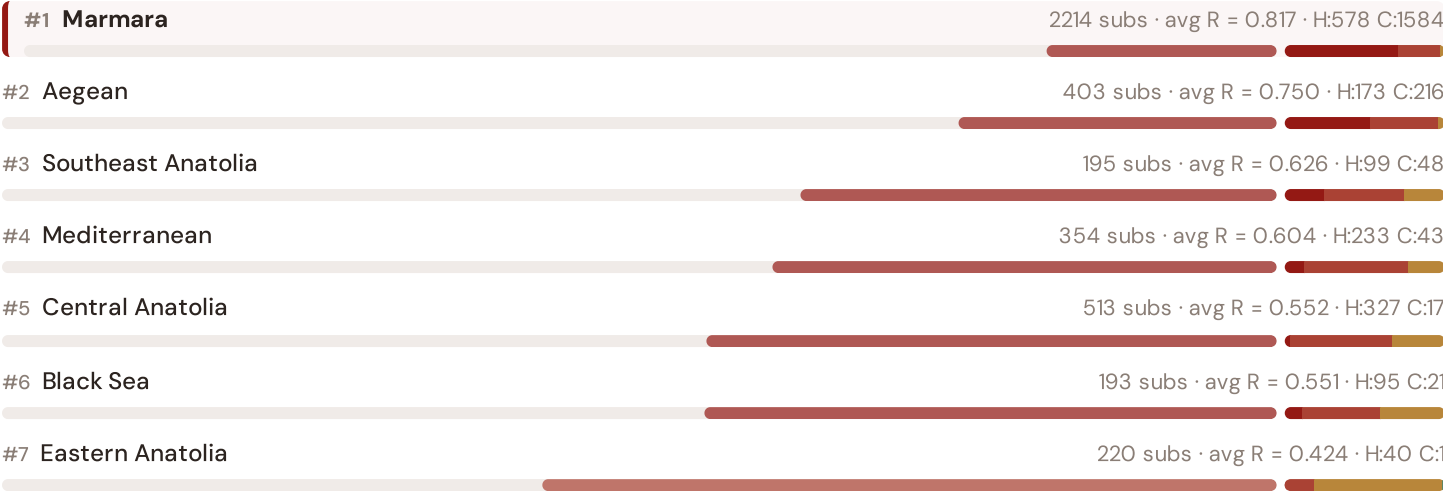


The Marmara ranks **#1 of 7 region regions** by mean R_{median}, placing it among the upper tier of national risk. The three most stressed are Marmara, Aegean, Southeast Anatolia, while the three most resilient are Eastern Anatolia, Black Sea, Central Anatolia. 2 of 7 score above the fleet average of 0.716. This ranking — possible only because the SSI scores every substation individually rather than relying on aggregate DSO or national statistics — reveals the true spatial distribution of grid stress. It is precisely this substation-level granularity that positions the SSI as a tool for investment prioritisation: not treating entire regions as monoliths, but identifying the specific corridors within each that demand attention.

SECTION F — RECURRING MODULE

SSI Enhanced Neural Network — Monthly Topic

From grid intelligence to BESS valuation platform. The SSI Index answers *"How healthy is this substation?"* The SSI Enhanced Neural Network (SSI-ENN) extends this into: *"What is a BESS worth at this substation — to the DNO and to the community?"* Each edition of this report explores one building block of the SSI-ENN's five-layer architecture, showing how the SSI Index data feeds directly into investment-grade grid analytics.

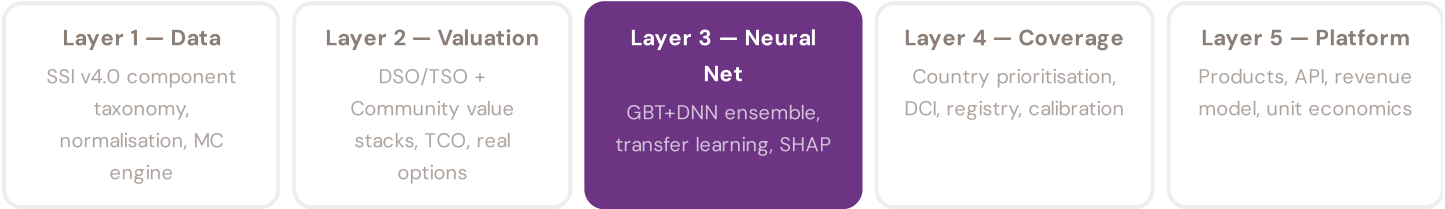

LAYER 3 §0.5.6 · June 2026

Explainability & SHAP Values

Clients need to understand not just the prediction but WHY a substation ranks highly

Investment-grade models require interpretability. SHAP (SHapley Additive exPlanations) provides a rigorous, game-theoretic attribution of each feature's contribution to each prediction. For every substation, the SSI-ENN produces a SHAP waterfall: starting from the fleet-average valuation and showing how each feature pushes the estimate up or down. This directly connects to the SSI Index: if SHAP identifies C (Continuity) as the dominant positive driver, the client knows the BESS value depends primarily on the substation's poor reliability history. Transparency converts model outputs into investment decisions.

KEY CONCEPTS

- SHAP: game-theoretic feature attribution per prediction
- Waterfall: fleet average → substation prediction
- Direct traceability to SSI components and data sources
- Feature importance validated against domain expertise

LIVE SSI DATA CONNECTION

The training set comprises 4,092 substations with complete feature vectors. Average CI_width of 0.183 across the fleet provides the uncertainty ground truth that the neural network's quantile regression heads must calibrate against. The fleet's risk distribution — 2 Low, 615 Medium, 1545 High, 1930 Critical — ensures balanced training across all risk bands.

Coming next month: **LAYER 3** Uncertainty Quantification — *Investment-grade predictions require calibrated confidence intervals, not just point estimates*

SECTION G

Looking Ahead

NEXT MONTH — EDITION 02

Mountain Region

Deep-dive into Region 10's grid risk profile — substation map, component analysis, region regions breakdown. European Context Card: Light-rural tier — limited substation density.

NEXT DATA REFRESH

Q3 2026 — 5 Quarterly Sources

EDAS-OSM, EGOV-REG, AEDAS-DGSI, TUBITAK-R, ETKB-REN are due for refresh in Q3. Impact: DER registry (T1), business fabric indicators (E2), macro-economic data. Highest-impact annual source pending: **EPDK (Enerji Piyasası Düzenleme Kurumu)** (8 variables → C1–C4 (SAIDI/SAIFI), I1–I3 (IRI), quality regulation).

FLEET SPOTLIGHT

Çine: Highest Risk Concentration

Çine has the highest concentration of High/Critical substations: **24 of 24 (100%)** are in the upper risk bands — avg R = 0.742. This makes it the most acute risk corridor in the fleet.

Edition 02 will be published on the second Thursday of July 2026. Deep-dive region: **Region 10**. To ensure you receive it, confirm your subscription segment (General / Institutional / Academic) by email to ssi_index@ikenga.eu.

Feedback welcome. The SSI Index is designed to evolve through stakeholder dialogue. If you represent an Turkish utility, EPDK, municipal energy company, or academic institution and would like to contribute data or methodology feedback, please contact us at ssi_index@ikenga.eu. The SSI's credibility depends on open scrutiny.

SSI Monthly Intelligence Report — Edition 003

Published 11 June 2026 · SSI Index v4.0.2 · 4,092 substations · 14,221 grid lines · 6 components · 20 metrics · 6 modifiers
10,000-iteration Gaussian Copula Monte Carlo · Sobol global sensitivity analysis (196,608 evals/substation) · CMIP6 SSP2-4.5