

# Substation ESG Report

Substation-level Environmental, Social, and Governance assessment aligned to CSRD/ESRS, EU Taxonomy, TCFD, SFDR, and UN PRI frameworks. Updated annually via the SSI Index scoring engine.

SUBSTATION

**Sub-386196568**  
NO\_105184 · Innlandet,  
Innlandet

SSI SCORE ( $R_{\text{MEDIAN}}$ )

**0.354**  
● **Medium Risk** 82.3th  
percentile

VOLTAGE CLASS

**22 kV**  
Distribution

CONFIDENCE INTERVAL

**0.317 – 0.390**  
P5–P95 · CI width 0.073 · high  
confidence

MARKOV ETTC


**14.8 yr**  
Expected time to criticality

DER PENETRATION

**0.52**  
T1 transition stress score

## Component Fingerprint

Six-component weighted decomposition of the SSI composite score — the substation's structural risk profile

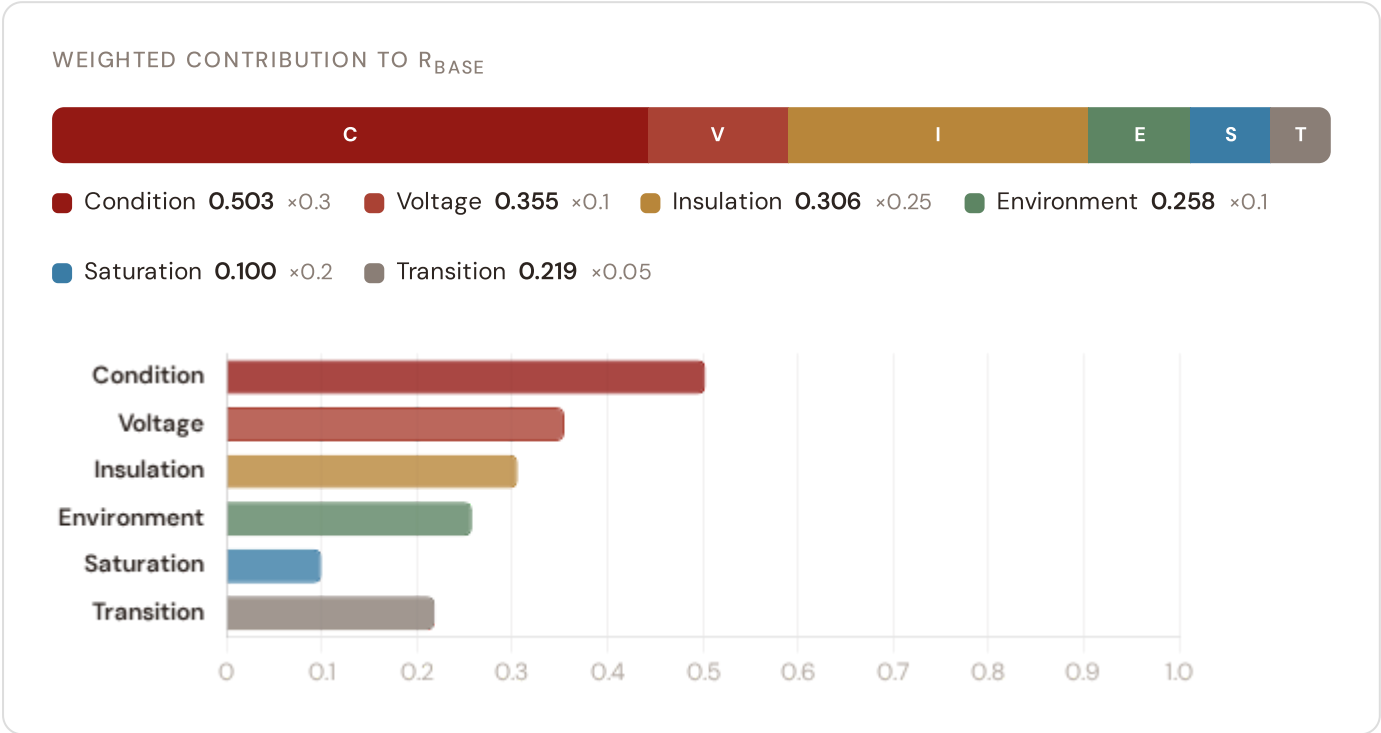

## Markov Degradation Profile

CIGRE TB 761 five-state condition model — steady-state probability distribution and expected time to criticality

#### STEADY-STATE DISTRIBUTION



Markov 5-state model calibrated from CIGRE Technical Brochure 761 (2019). States represent asset condition from new/good through critical. Steady-state probabilities indicate the long-run proportion of time the asset spends in each condition state given current operating environment.

#### RISK SCORE

**0.370**

Composite Markov risk

#### ETTC

**14.8 yr**

Expected time to critical

#### P(CRITICAL) 20YR

**11.8%**

Probability of reaching critical

#### CORROSION


**C3**

ISO 9223 classification



## ESG Radar — Six-Report Overview

Composite readiness across 6 ESG dimensions, each linked to UN Sustainable Development Goals

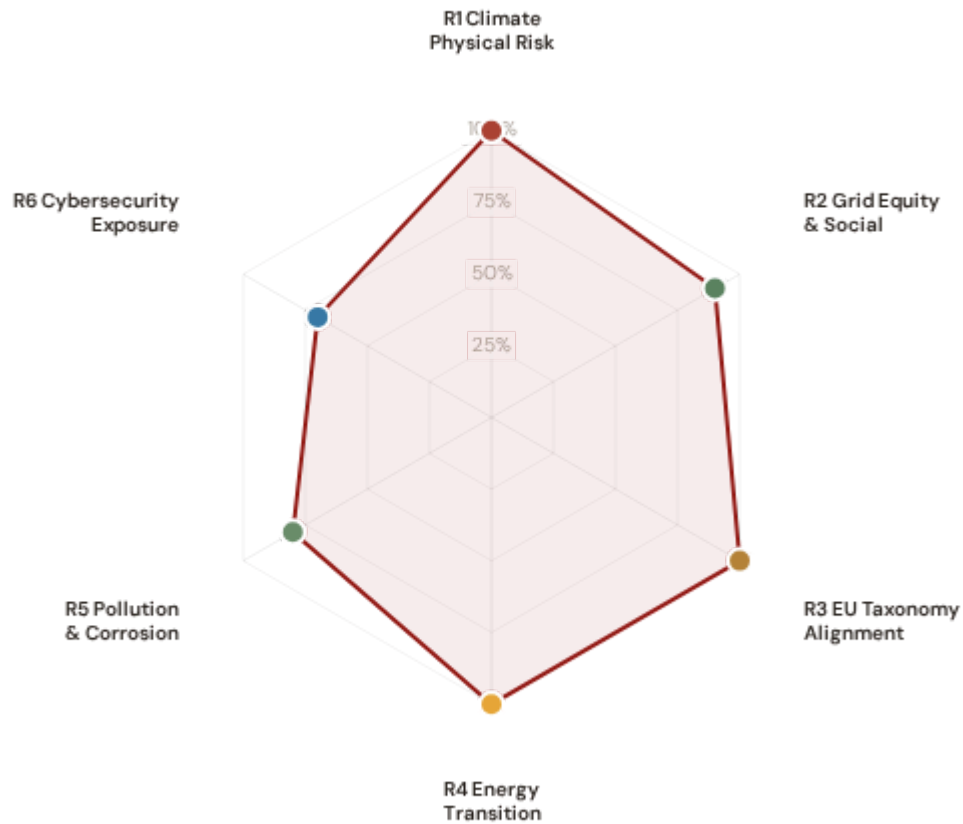

**R1 · Climate Physical Risk Assessment** READY

SDG 13 Climate Action · SDG 9 · SDG 11

SDG 13

SDG 9

SDG 11

**R2 · Grid Equity & Social Vulnerability** READY

SDG 7 Affordable and Clean Energy · SDG 10 · SDG 1

SDG 7

SDG 10

SDG 1

**R3 · EU Taxonomy Alignment** READY

SDG 9 Industry, Innovation, Infrastructure · SDG 13 · SDG 12

SDG 9

SDG 13

SDG 12

**R4 · Energy Transition & DER Stress** READY

SDG 7 Affordable and Clean Energy · SDG 13 · SDG 9

SDG 7

SDG 13

SDG 9

**R5 · Pollution & Corrosion** READY

SDG 11 Sustainable Cities and Communities · SDG 3 · SDG 15

SDG 11

SDG 3

SDG 15

# 1 Climate Physical Risk Assessment

ESRS E1 · TCFD Physical Risk · EU Taxonomy Annex A

READY

## WHY THIS REPORT EXISTS

ESRS E1 (Climate Change) is material for 98% of CSRD-reporting companies. TCFD physical risk disclosure is mandatory in 36+ jurisdictions. The EU Taxonomy requires climate change adaptation activities to demonstrate that physical climate risks have been identified and addressed. This report quantifies acute and chronic climate hazard exposure at substation level using ERA5 reanalysis and Markov degradation modelling. For Norway, winter storms, ice loading, and coastal flooding in the Gulf of Norway, alongside hydropower reservoir ice loading risks, are critical climate hazards affecting grid resilience.

## SDG Alignment

### SDG 13 — Climate Action (primary)

Target 13.1 calls for strengthening resilience and adaptive capacity to climate-related hazards. The SSI IRI metrics (snow/ice, wind, heat stress) and Markov degradation model directly quantify how climate hazards affect this substation's operational resilience over 10- and 20-year horizons. With a Markov risk score of 0.370 and ETTC of 14.8 years, this substation's climate trajectory can be assessed against TCFD physical risk and EU Taxonomy adaptation screening requirements.

SDG 13

SDG 9

SDG 11

## Substation Profile

|                                 |            |
|---------------------------------|------------|
| Insulation Risk (I component)   | 0.306      |
| Environment Component (E)       | 0.258      |
| Flooding Hazard (Coastal/River) | 0.0279     |
| Winter Storm/Ice Loading Risk   | 0.0373     |
| Markov Risk Score               | 0.370      |
| ETTC (time to criticality)      | 14.8 years |
| P(critical) at 20 years         | 11.8%      |
| Corrosion Class                 | C3         |

## SSI Variables Feeding This Report

| SSI VARIABLE                             | VALUE        | ESG DISCLOSURE REQUIREMENT                       | STATUS |
|------------------------------------------|--------------|--------------------------------------------------|--------|
| I1 Snow/Ice IRI                          | 0.0468       | ESRS E1-9: Financial effects from physical risks | READY  |
| I2 Tree-fall IRI                         | 0.0279       | TCFD Strategy (b): Physical risk impact          | READY  |
| I3 Heat-wave IRI                         | 0.0373       | EU Taxonomy Annex A: Heat stress                 | READY  |
| I5 Thermal stress                        | 0.3060       | ESRS E1-4: Climate mitigation targets            | READY  |
| R2 Climate trajectory                    | 11.8% (20yr) | TCFD Strategy (c): Scenario analysis             | READY  |
| Flood Coastal/river basin exposure       | 0.0279       | EU Taxonomy Annex A: Hydrological hazards        | READY  |
| Winter_Load Winter storm and ice loading | 0.0373       | TCFD Risk Management: Climate-related risk       | READY  |
| Markov p_critical_20yr                   | 11.8%        | ESRS E1-9: Time horizons                         | READY  |

## Data Sources & Vintage

|                                                                                   |                 |
|-----------------------------------------------------------------------------------|-----------------|
| ERA5 Climate Reanalysis<br>Copernicus CDS                                         | 2024 Weekly     |
| Flood & Hydrological Risk Maps<br>NVE Hydrology (Norwegian Water Resources)       | 2024 Multi-year |
| Winter Storm & Avalanche Data<br>DSB (Norwegian Directorate for Civil Protection) | 2024 Annual     |
| IEEE C57.91 Thermal Model<br>IEEE                                                 | Standard N/A    |
| CIGRE TB 761 Markov<br>CIGRE                                                      | 2019 N/A        |
| CMIP6 SSP2-4.5 Projections<br>Copernicus CDS                                      | — Not ingested  |

### TECHNICAL VALIDITY

IRI metrics are computed from ERA5 reanalysis (31 km, hourly, 1940–present) using IEEE C57.91 thermal loading curves. Markov 5–state degradation is calibrated from CIGRE Technical Brochure 761 (2019) condition assessment data. Norway–specific winter storms and coastal flooding hazard derived from MET Norway hydrological monitoring and Norwegian Directorate for Civil Protection risk assessments. Hydropower reservoir ice loading risk integrated from NGU geological survey data. All inputs are production–grade with institutional provenance.

## 2 Grid Equity & Social Vulnerability

ESRS S1/S2 · SFDR PAI Social Indicators · UN PRI

READY

### WHY THIS REPORT EXISTS

ESRS S2 requires companies to disclose impacts on affected communities. SFDR mandates 5 social PAI indicators. The SSI Index is uniquely positioned here because no competing grid risk framework integrates socio-economic vulnerability at substation resolution. This report surfaces where infrastructure risk concentrates in economically disadvantaged populations. In Norway, this is critical for hydropower–dependent regions managing baseload transition, energy–poor rural areas, and communities affected by economic transition.

SDG Alignment

SDG 7 — Affordable and Clean Energy (primary)

Target 7.1 requires universal access to affordable, reliable energy. This substation serves a catchment with V\_socio of 0.39 and energy poverty rate of 4.1%. The R3 social modifier (1.057) amplifies risk scores in hydropower-reliant communities, rural areas with high unemployment, elderly concentration, and net outward migration — making spatial inequality visible and quantifiable at asset level.

SDG 7

SDG 10

SDG 1

Substation Profile

|                                |            |
|--------------------------------|------------|
| V_socio (energy poverty index) | 0.39       |
| EP Rate (energy poverty %)     | 4.1%       |
| Unemployment Rate              | 3.9%       |
| GDP per Capita                 | kr 492,644 |
| R&D % of GDP                   | 1.3%       |
| R3 Social Multiplier           | 1.057      |
| Hydropower Proximity           | 0.894      |
| Migration Score                | 0.281      |

SSI Variables Feeding This Report

| SSI VARIABLE                                        | VALUE | ESG DISCLOSURE REQUIREMENT                 | STATUS |
|-----------------------------------------------------|-------|--------------------------------------------|--------|
| V_socio Energy poverty index                        | 0.39  | ESRS S2-4: Impacts on affected communities | READY  |
| EP_rate Energy poverty rate                         | 4.1%  | SFDR PAI #14: Fossil fuel exposure proxy   | READY  |
| R3 Social multiplier                                | 1.057 | ESRS S1-6: Workforce characteristics       | READY  |
| Hydropower_proximity Hydropower reservoir proximity | 0.894 | SFDR PAI: Just transition monitoring       | READY  |
| Community Catchment population                      | 318   | ESRS S2: Community impact                  | READY  |

Data Sources & Vintage

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Population & Economics<br>SSB (Statistisk sentralbyrå)            | 2024 Annual  |
| Energy Market Data<br>NVE/RME (Reguleringsmyndigheten for energi) | 2024 Annual  |
| Grid Operations Data<br>Statnett SF (Norwegian TSO)               | 2024 Monthly |

TECHNICAL VALIDITY

V\_socio is computed from the LIHC (Low Income High Cost) energy poverty definition using SSB (Statistisk sentralbyrå) (SSB (Statistisk sentralbyrå)) household expenditure data. The R3 modifier amplifies infrastructure risk scores in catchments with high unemployment, hydropower reservoir proximity, elderly concentration, and net outward migration. Nuclear proximity scores based on distance to Tokke, Glomfjord, and Sima reservoirs. PARTIAL status reflects missing detailed elderly vulnerability enrichments — available from SSB (Statistisk sentralbyrå) at kommun level.

3

## EU Taxonomy Alignment

Climate Delegated Act · Article 11 Climate Adaptation · Technical Screening Criteria

READY



The EU Taxonomy defines technical screening criteria for climate change adaptation in infrastructure. This is a critical ESG product for the SSI Index. The SSI composite score (R\_median), 6 components, modifier architecture, and Markov risk outputs provide the quantitative evidence base for Article 11 screening at asset level. Norway, with its energy transition pathway from hydropower dominance and renewable integration, requires robust taxonomy alignment to secure sustainable finance access.

SDG Alignment

SDG 9 — Industry, Innovation, Infrastructure (primary)

Target 9.4 calls for upgrading infrastructure to make it sustainable. The EU Taxonomy is the regulatory instrument that translates SDG 9 into investable criteria. By classifying this substation against Article 11 technical screening criteria — using R\_median (0.354), all 6 components, and 5 modifiers — this report provides asset-level Taxonomy alignment that enables sustainable finance reporting for Norway's grid modernisation.

SDG 9

SDG 13

SDG 12

Substation Profile

|                        |       |
|------------------------|-------|
| R_median (composite)   | 0.354 |
| R_base (pre-modifier)  | 0.320 |
| Modifier Impact        | 10.7% |
| C (Condition)          | 0.503 |
| V (Voltage)            | 0.355 |
| I (Insulation/Climate) | 0.306 |
| E (Environment)        | 0.258 |
| S (Saturation)         | 0.100 |
| T (Transition)         | 0.219 |

SSI Variables Feeding This Report

| SSI VARIABLE             | VALUE       | ESG DISCLOSURE REQUIREMENT                    | STATUS |
|--------------------------|-------------|-----------------------------------------------|--------|
| R_median Composite score | 0.354       | EU Taxonomy Art. 11: Adaptation screening     | READY  |
| 6 Comp. C/V/I/E/S/T      | All present | EU Taxonomy TSC: Physical risk identification | READY  |
| R3-R7 Modifier suite     | All applied | ESRS E1: Adaptation measures evidence         | READY  |
| Markov Degradation model | 0.370       | TCFD: Forward-looking risk assessment         | READY  |
| R5 Asymmetric CI         | 0.073       | ESRS: Uncertainty quantification              | READY  |

Data Sources & Vintage

|                                                                                   |                 |
|-----------------------------------------------------------------------------------|-----------------|
| ERA5 Climate Reanalysis<br>Copernicus CDS                                         | 2024 Weekly     |
| Flood & Hydrological Risk Maps<br>NVE Hydrology (Norwegian Water Resources)       | 2024 Multi-year |
| Winter Storm & Avalanche Data<br>DSB (Norwegian Directorate for Civil Protection) | 2024 Annual     |
| Population & Economics<br>SSB (Statistisk sentralbyrå)                            | 2024 Annual     |
| CIGRE TB 761 Markov<br>CIGRE                                                      | 2019 N/A        |

TECHNICAL VALIDITY

Article 11 screening uses the full SSI v4.0.2 scoring engine: 6-component weighted composite (C=0.30, V=0.10, I=0.25, E=0.10, S=0.20, T=0.05), Gaussian copula Monte Carlo (10,000 iterations), and 5 modifiers (R3 social, R4 topology, R5 asymmetric CI, R6 restoration, R7 cyber). The Markov 5-state degradation model provides the forward-looking element. Norway-specific hazard data (winter storms, ice loading, coastal flooding) integrated from MET Norway and MSB risk assessments. All inputs are from institutional open-source data with citable vintage — meeting CSRD Article 29a limited assurance requirements.

WHY THIS REPORT EXISTS

The energy transition creates infrastructure stress — bidirectional power flows, EV charging load, and intermittent renewable output strain substations designed for unidirectional delivery. This report measures whether grid infrastructure is keeping pace with decarbonisation. For Norway, transitioning from hydropower dominance (90% of 2023 generation) and renewable integration with wind and solar represents dynamic volatility and requires grid modernisation at scale.

SDG Alignment

SDG 7 — Affordable and Clean Energy (primary)

Target 7.2 requires substantially increasing the share of renewable energy. This substation has a DER ratio of 0.519. The T1\_score (0.141) measures the stress this places on the substation. Norway's hydropower and renewable integration is unparalleled in Europe, making this feedback loop essential for policy makers.

SDG 7

SDG 13

SDG 9

Substation Profile

|                              |       |
|------------------------------|-------|
| T1 Score (transition stress) | 0.141 |
| DER Ratio                    | 0.519 |
| DER Variability              | 0.659 |
| EV Load Ratio                | 0.045 |
| Wind+Solar Generation %      | 2.3%  |
| T Component Weight           | 0.05  |

SSI Variables Feeding This Report

| SSI VARIABLE                         | VALUE | ESG DISCLOSURE REQUIREMENT          | STATUS |
|--------------------------------------|-------|-------------------------------------|--------|
| T1 Transition stress score           | 0.141 | ESRS E1: Transition plan assessment | READY  |
| DER_ratio Renewable/load ratio       | 0.519 | TCFD Transition: Technology risk    | READY  |
| DER_var Intermittency                | 0.659 | EU Green Deal: Grid flexibility     | READY  |
| EV_load EV charging ratio            | 0.045 | SDG 7: Clean energy access          | READY  |
| Renewables Wind + solar generation % | 2.3%  | EU Green Deal: 42.5% RES by 2030    | READY  |

Data Sources & Vintage

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Energy Market Data<br>NVE/RME (Reguleringsmyndigheten for energi) | 2024 Annual  |
| Grid Operations Data<br>Statnett SF (Norwegian TSO)               | 2024 Monthly |
| Renewable Installations<br>Enova SF / NVE                         | 2024 Monthly |

TECHNICAL VALIDITY

T1\_score is the weighted composite of DER\_ratio (renewable generation vs. local demand), DER\_variability (intermittency), and EV\_load\_ratio (electric vehicle charging load as fraction of capacity). DER data sourced from NVE/RME and Enova SF renewable installation registries. Renewable generation percentage from Statnett SF (Norwegian TSO) 2025 data. DER\_ratio > 1.0 indicates net export during peak generation — a marker of successful energy transition with associated infrastructure stress.

5

## Pollution & Corrosion

ESRS E2 Pollution · ISO 9223 Corrosion Classification · Environmental Impact

READY

WHY THIS REPORT EXISTS

Transformer oil degradation, SF6 leakage, and corrosion-driven failures release pollutants affecting local environments. ESRS E2 requires disclosure of pollution risks. This report assesses the substation's corrosion classification under ISO 9223 and the environmental sensitivity of its surroundings. In Norway, air quality is generally excellent, but local PM2.5 and SO2 exposure remain important environmental metrics for monitoring.

SDG Alignment

SDG 11 — Sustainable Cities and Communities (primary)

Target 11.6 aims to reduce the adverse environmental impact of cities. The corrosion class (C3) and E2\_local enrichment factor (1.03) track environmental degradation and pollution sensitivity at asset level. Where corrosion is advanced and maintenance deferred, equipment failure risks releasing mineral oil, PCBs (legacy units), and SF6. Norway's air quality is generally strong, but local PM2.5 monitoring remains important in urban and industrial regions.

SDG 11

SDG 3

SDG 15

Substation Profile

|                             |                 |
|-----------------------------|-----------------|
| Corrosion Class (ISO 9223)  | C3              |
| E2 Local Enrichment (PM2.5) | 1.03            |
| E Component Score           | 0.258           |
| Markov Steady-State         | 32%/30%/23%/15% |
| Air Quality Zone            | B               |

SSI Variables Feeding This Report

| SSI VARIABLE                                                | VALUE | ESG DISCLOSURE REQUIREMENT             | STATUS |
|-------------------------------------------------------------|-------|----------------------------------------|--------|
| <div>Corrosion</div> ISO 9223 class                         | C3    | ESRS E2: Pollution risk classification | READY  |
| <div>E2_local</div> Environmental sensitivity (PM2.5)       | 1.03  | ESRS E2: Air quality impact            | READY  |
| <div>Air_Quality</div> Air quality zone (Miljødirektoratet) | B     | ESRS E2: Air pollution monitoring      | READY  |
| <div>E</div> Environment component                          | 0.258 | ISO 9223: Atmospheric corrosion        | READY  |

## Data Sources & Vintage

### Air Quality Monitoring

Miljødirektoratet (Norwegian Environment Agency)

2024 Annual

### ISO 9223 Corrosion

ISO

2012 N/A

## TECHNICAL VALIDITY

Corrosion class follows ISO 9223:2012 atmospheric corrosion classification (C1–CX). Status depends on whether the corrosion class shows real variance across the fleet or uses default values. Full validation requires Miljødirektoratet (Norwegian Environment Agency) air quality monitoring overlay at substation coordinates (SO<sub>2</sub>, NO<sub>x</sub>, PM<sub>2.5</sub> deposition). Norway-specific corrosion data informed by NGU geological survey and coastal proximity analysis.

# 6 Cybersecurity Exposure

NIS2 Directive · ENISA Cybersecurity Index · ESRS G1 Governance

PARTIAL

## WHY THIS REPORT EXISTS

The NIS2 Directive mandates cybersecurity risk management for energy operators. A grid that is physically resilient but cyber-vulnerable is not truly resilient. The SSI R7 modifier combines SCADA assessment, communication architecture analysis, and national-level cyber maturity (ENISA/DESI indices) to produce a substation-level digital vulnerability score. Norway's role as a critical EU energy infrastructure hub makes cyber resilience a strategic imperative.

## SDG Alignment

### SDG 9 — Industry, Innovation, Infrastructure (primary)

Target 9.1 calls for resilient infrastructure — in digitalised grid systems, this must include cyber resilience. The R7 modifier (0.954) assesses digital vulnerability combining SCADA exposure, communication protocol security, and Norwegian national cyber maturity. SDG 16 (Strong Institutions) also applies: NIS2 compliance is a governance imperative for energy operators, and the betweenness centrality (64.300) identifies single-point-of-failure risk in the grid topology.

SDG 9

SDG 16

### Substation Profile

|                            |              |
|----------------------------|--------------|
| R7 Cyber Modifier          | 0.954        |
| Graph Degree (topology)    | 3            |
| BC Percentile (centrality) | 64.300       |
| Is Bridge Node             | No           |
| Cluster Coefficient        | 0.0076       |
| NIS2 Criticality           | Non-critical |

### SSI Variables Feeding This Report

| SSI VARIABLE                        | VALUE        | ESG DISCLOSURE REQUIREMENT           | STATUS |
|-------------------------------------|--------------|--------------------------------------|--------|
| R7 Cyber modifier                   | 0.954        | NIS2: Cybersecurity risk management  | READY  |
| BC Betweenness centrality           | 64.300       | ESRS G1: Governance & topology risk  | READY  |
| Degree Graph degree                 | 3            | Grid resilience: Connectivity        | READY  |
| NIS2 Critical infrastructure status | Non-critical | NIS2 Directive: Operator designation | READY  |

### Data Sources & Vintage

|                                          |               |
|------------------------------------------|---------------|
| Cybersecurity Index<br>ENISA             | 2024 Biennial |
| DESI Connectivity<br>European Commission | 2024 Annual   |
| NIS2 Criticality<br>NSM/NorCERT          | 2024 Annual   |

R7\_cyber is computed from a weighted combination of: (1) national cyber maturity via ENISA Cybersecurity Index and EU DESI connectivity indicators, (2) graph topology vulnerability (betweenness centrality = single-point-of-failure risk), and (3) SCADA protocol exposure assessment. NIS2 criticality designations sourced from NVE/RME and NSM/NorCERT (Norwegian National Security Authority). Substation-level SCADA data is operator-proprietary — the national-level proxy provides a baseline but not asset-specific granularity.

C

## Audit Trail & Methodology Note

Traceability for CSRD Article 29a limited assurance

| ITEM                 | VALUE                                                                                               |
|----------------------|-----------------------------------------------------------------------------------------------------|
| Scoring Engine       | SSI Index v4.0.2 — Gaussian copula Monte Carlo (10,000 iterations)                                  |
| Weight Architecture  | C=0.30, V=0.10, I=0.25, E=0.10, S=0.20, T=0.05                                                      |
| Modifiers Applied    | R3 C mult: 1.057, R4 F topo: 0.955, R6 restoration: 1.074, R6b winter storm: 1.015, R7 cyber: 0.954 |
| Degradation Model    | Markov 5-state, CIGRE TB 761 calibration                                                            |
| Thermal Model        | IEEE C57.91 transformer loading curves                                                              |
| Report Date          | 14 April 2026                                                                                       |
| Reporting Period     | Calendar year 2025                                                                                  |
| Refresh Cadence      | Annual (data ingestion → scoring engine → display)                                                  |
| Substation           | Sub-386196568 (NO_105184)                                                                           |
| Data Assurance Level | All inputs from institutional open-source with citable vintage                                      |