



Norway — Monthly Intelligence Report

v4.2

Edition 006 — Deep-Dive Theme

Where the energy transition is outrunning the grid. edition · August 2026 · SSI v4.2
(refreshed June 2026)

CONTENTS


A Executive Summary	E European Context Card
B Cyber & Economic Exposure Monitor	F SSI Enhanced Neural Network
C Data Refresh & Changelog	F.5 Anti-maladaptation Gate (Radar 2 · W1–W10) v4.2
D Deep-Dive: Monthly Theme	G Looking Ahead

SECTION A

Executive Summary

Radar 1 — v4.2: now 7-axis with the new Re composite

v4.0.2 Radar 1 had 6 axes (C/V/I/E/S/T). v4.2 adds **Re** — the bounded resilience composite capturing the new modifier family (R6c flood + R6d wildfire + R6e winter + R8 adapt + R9 compound + R10 just) in one normalised scalar (Re_norm ∈ [0, 1] via clip((Re_raw - 0.920) / (1.787 - 0.920), 0, 1)). Two worked examples overlaid: **Lambertseter trafostasjon** (low-exposure reference, Re_norm 0.000) · **[NO_105735, 22 kV, Finnmark]** (high-exposure reference, Re_norm 1.000). The Re axis is colour-highlighted in cayenne to emphasise the v4.2 architectural addition.

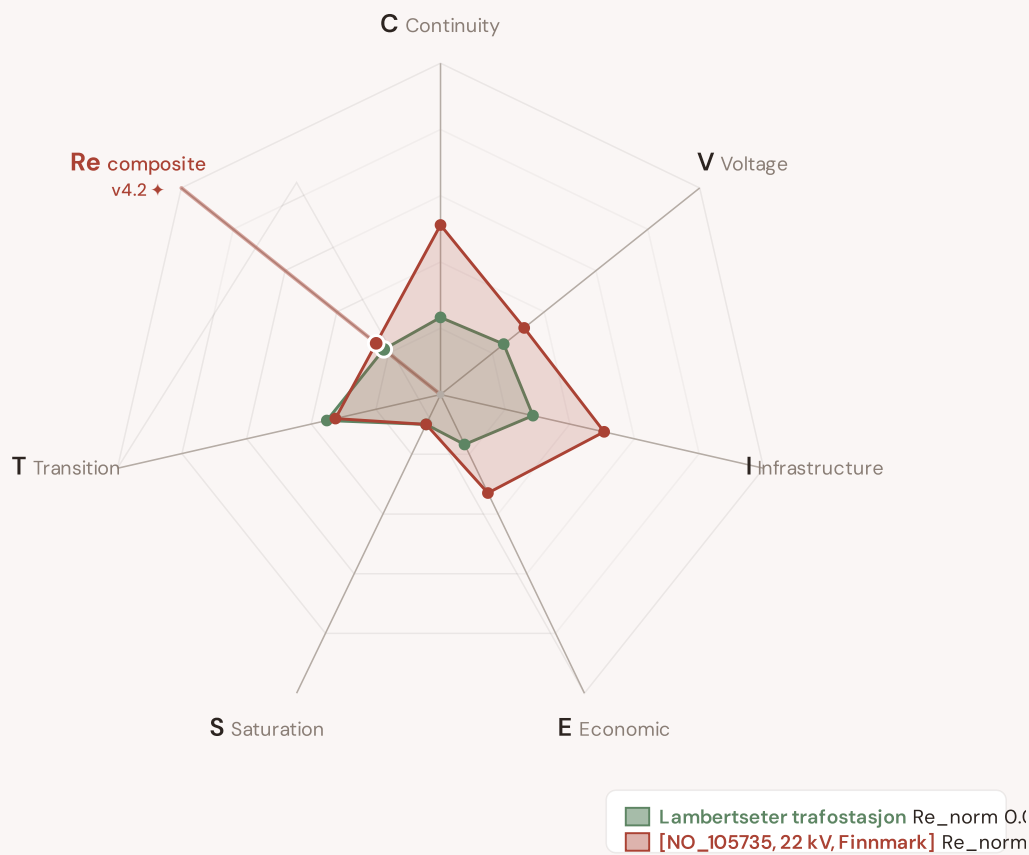

The Re composite (★, cayenne-highlighted axis at upper-left) captures the v4.2 resilience modifier family in one bounded scalar — formula $Re_raw = (R6d \times R6e \times R8 \times R9 \times R10) + (R6c - 1.00)$, bounds [0.920, 1.787]. Per Convention #6 §2.3.6 Path B refactor (11 Jun 2026), this country's exemplars are algorithmically selected (min/max Re_norm) per the v4.2 methodology. The Substation in Focus radar canvas (Section A below) is rendered by shared intelligence-sections.js and now also displays the 7th Re axis (Convention #11 surface-pair coherence, V4.2-disc-24 closure 12 Jun 2026).

SUBSTATIONS SCORED

6,113

172 EHV · 495 HV · 5,175 distribution-tier

GRID LINES MAPPED

15,089

~43,247 km coverage

MC SIMULATIONS

42.9 M

10,000 per substation

PUBLIC DATA SOURCES

34

101 variables · zero proprietary

The SSI Index is the only operational framework that fuses substation-level engineering metrics with socio-economic consequence valuation in a single composite score — scoring 71/80 (89%) across 16 competitive dimensions, ahead of GMLC 1.1 (48/80), EPRI (40/80), and academic MCDA frameworks (41/80). Its engine processes 146,000+ source data points per run, executes 42.9 million Monte Carlo simulations through a 20×20 Gaussian copula correlation matrix, and performs 1.78 billion arithmetic operations — producing 244,701 output data points with full uncertainty quantification across 6,113 substations and 15,089 grid lines spanning ~43,247 km. v4.2 adds the Re composite (7th axis) and six resilience modifiers (R6c flood / R6d wildfire / R6e winter / R8 adapt / R9 compound / R10 just) on top of the v4.0.2 foundation.

Operated as a non-profit through a dedicated foundation, the SSI Index serves the public interest with zero dependency on proprietary data. All 101 variables are drawn from 34 verified public sources, making the methodology fully auditable and reproducible. Initially covering Norway's entire transmission and distribution grid, the Index is progressively being rolled out to all OECD countries — applying the same silo-breaking approach: fusing grid risk with societal exposure at asset-level resolution wherever open data permits.

Substation in Focus

Sub-1037441093

Rogaland, Rogaland · 66 kV

0.433

Medium

0.105

30th

R_FINAL

CLASSIFICATION

CI WIDTH

FLEET PERCENTILE

Re composite v4.2 7th axis

Re_raw 1.1119 · Re_norm 0.000

LOW EXPOSURE

COMPONENTS

C

Continuity: 0.513 / 0.30 (171%)

I

Infrastructure: 0.288 / 0.25 (115%)

S

Saturation: 0.500 / 0.20 (250%)

V

Voltage: 0.346 / 0.10 (346%)

E

Economic: 0.184 / 0.10 (184%)

T

Transition: 0.353 / 0.05 (706%)

MODIFIERS

R3

Consequence: 0.931 ↓ dampens

R4

Graph Criticality: 0.947 ↓ dampens

R6a

Restoration: 1.039 ↑ amplifies

R6b

Seismic: 1.011 ↑ amplifies

R7

Digital Readiness: 0.982 ↓ dampens

This month's spotlight — automatically selected for August 2026 — is **Sub-1037441093** in Rogaland, Rogaland. With an R_final of 0.433 (Medium band, 30th fleet percentile), its risk profile is dominated by the T (Transition) component at 706% of its weight ceiling, followed by V (Voltage) at 346%. Modifiers collectively shift R_base by 9.2%, reflecting the substation's specific geographic, socio-economic, and network context.

SECTION B — RECURRING MODULE

Cyber & Economic Exposure Monitor

Why this section exists: Traditional grid risk frameworks treat cybersecurity and economic vulnerability as separate domains. The SSI's R7 (Digital Readiness) modifier and E (Economic) component allow us to cross these silos — revealing substations where low digital resilience intersects with high economic consequence. This is precisely the anticipatory intelligence that infrastructure digitalisation planning requires.

CYBER HIGH EXPOSURE

0

0.0% of fleet

BLIND SPOTS

1004

High/Critical/Extreme + R7 < median

AVG R7 MODIFIER

0.9869

Range [0.99, 1.05]


HIGH-CONSEQUENCE SUBS

1,455

23.8% · R3 ≥ 1.04

B.1 Cyber-Physical Risk Matrix

Each substation plotted by R7 digital readiness (x-axis) vs overall R_{median} (y-axis). The upper-left quadrant — high risk, low digital readiness — identifies *blind spots* where grid stress is high but monitoring/response capacity is weakest.

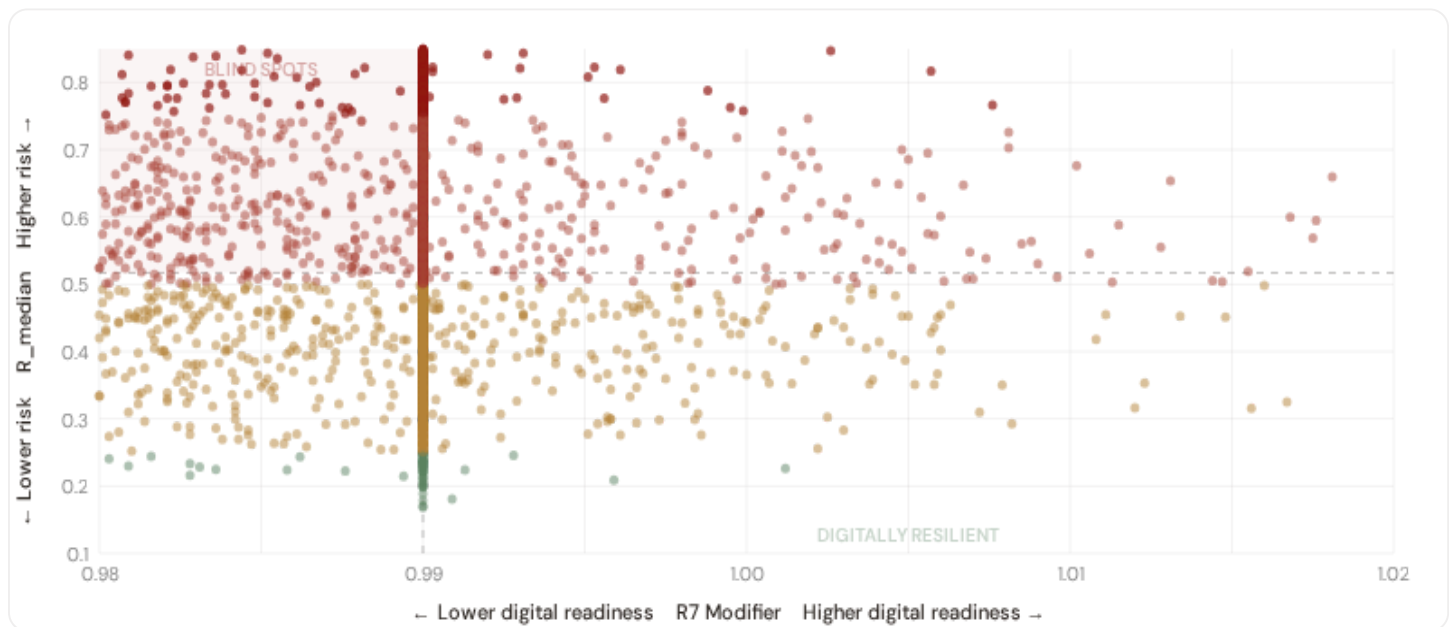

● Low ● Medium ● High ● Critical

Dashed lines = fleet medians

The cyber-physical matrix identifies **1004 blind-spot substations** — scoring High, Critical, or Extreme on overall risk while sitting below the fleet median for digital readiness ($R7 < 0.9900$). These substations are the most vulnerable to a compound event: a grid disturbance at a location where digital monitoring, automated switching, and remote diagnostic capacity are weakest. The blind spots concentrate in **Innlandet (134)**, **Vestland (122)**, **Finnmark (111)**. Across the full fleet, 0 substations (0.0%) carry a HIGH cyber-exposure classification, while 0 (0.0%) are in the LOW tier.

B.2 Economic Impact by Business Fabric

Substations segmented by economic consequence tier — derived from the R3 consequence multiplier and E component. Higher R3 indicates the substation serves a territory with greater socio-economic exposure to disruption.

 **Capital-Intensive / High-Consequence**

Est. VoLL: €15–30/kWh

Substations serving highest-value economic activity — pharma / chemicals / data centres / financial districts / heavy industry

599 substations (9.8%) High/Crit/Ext: **564** (94.2%) Avg R: **0.709** Avg E: **0.950** / 0.10

Low 0

Med 35

High 334

Crit 230

Ext 0

 **Industrial / Medium-Large Enterprise**

Est. VoLL: €8–15/kWh

Industrial belt — significant continuity requirements

895 substations (14.6%) High/Crit/Ext: **658** (73.5%) Avg R: **0.591** Avg E: **0.707** / 0.10

Low 0

Med 237

High 531

Crit 127

Ext 0

 **Commercial / SME-Dense**

Est. VoLL: €3–8/kWh

Service economy, retail, urban commercial districts — moderate individual impact

1,436 substations (23.5%) High/Crit/Ext: **865** (60.2%) Avg R: **0.547** Avg E: **0.512** / 0.10

Low 5

Med 566

High 737

Crit 128

Ext 0

 **Light / Agricultural / Rural**

Est. VoLL: €1–3/kWh

Sparse activity, agricultural land — lower VoLL

2,912 substations (47.6%) High/Crit/Ext: **1234** (42.4%) Avg R: **0.481** Avg E: **0.198** / 0.10

Low 74

Med 1604

High 1163

Crit 71


Ext 0

Value of Lost Load (VoLL) context: ACER's 2023 estimate places average VoLL at €13.1/kWh for industrial customers and €3.2/kWh for residential. The SSI's Economic component (CVIESTR-E) segments substations by the economic value they serve. **564 substations** combine capital-intensive economic fabric (top-decile Economic component ($E \geq 0.827$, P90+)) with High, Critical, or Extreme risk classification — representing the highest VoLL-weighted exposure in the fleet.

The capital-intensive tier concentrates in **Finnmark (261), Innlandet (102), Nordland (101)** — regions where industrial corridors depend on uninterrupted power for continuous processes. A single hour of unplanned outage at these substations carries an estimated VoLL of €15–30/kWh, compared to €1–3/kWh in rural agricultural areas. The fleet-wide average energy poverty rate is 3.9%, but this masks sharp regional variation: Southern regions combine higher energy poverty with higher grid risk, creating a double vulnerability that the E component captures. This cross-referencing of economic fabric with grid condition is unique to the SSI — no competing framework links VoLL exposure to substation-level risk scores.

B.3 Province Digital Readiness Ranking

Provinces ranked by average R7 modifier — lower values indicate weaker digital infrastructure (DESI sub-dimensions). Cross-referenced with average R_{median} to identify provinces combining digital exposure with high grid stress.

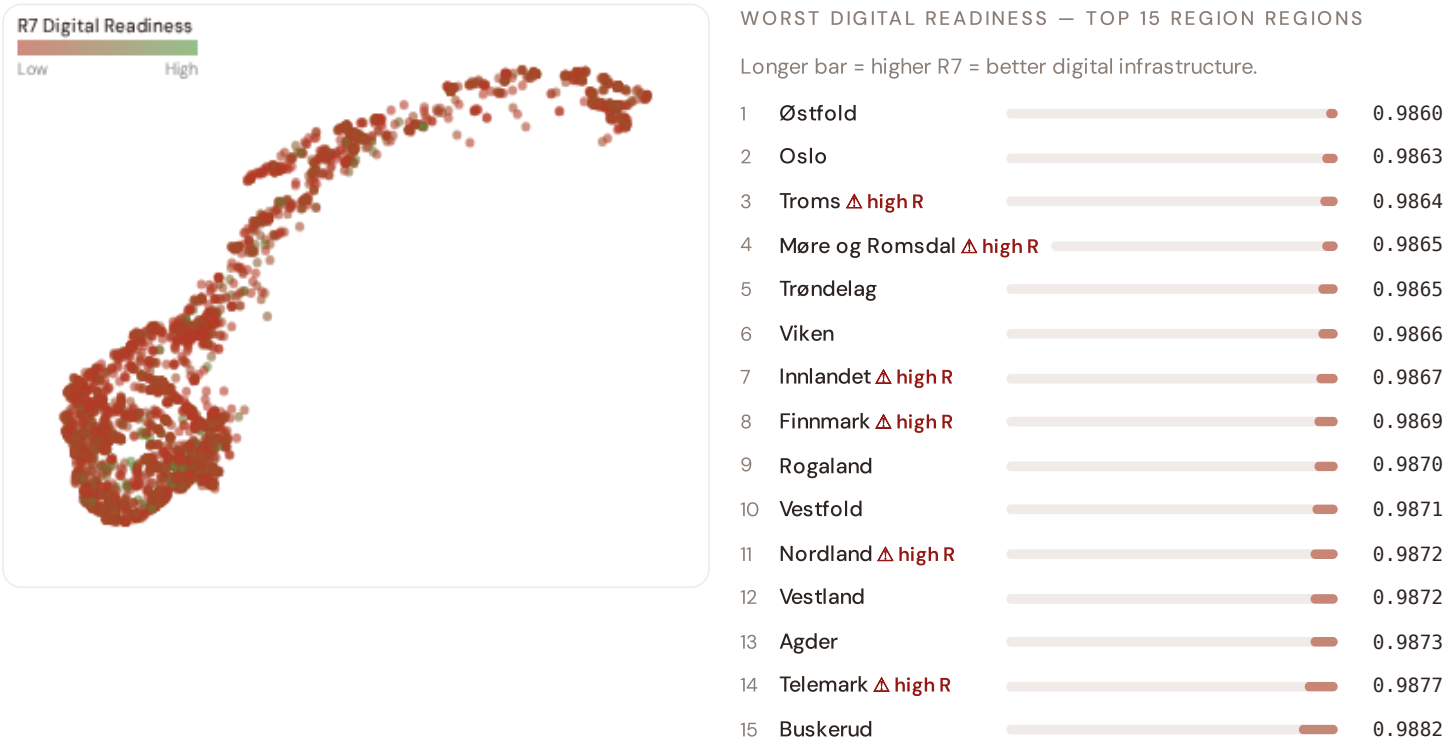

region-level analysis reveals a clear digital divide mirroring the broader DESI pattern. **Østfold** has the lowest average R7 (0.9860), while **Buskerud** leads at 0.9882 — a spread of 0.0023 across the R7 range. **6 region regions** combine below-median digital readiness with above-median grid risk, making them priority targets for digitalisation investment. The R7 modifier is intentionally narrow to reflect the current limitations of open DESI data — as NIS2 compliance reporting matures, future editions will expand R7's dynamic range and incorporate operational technology (OT) security indicators.

B.4 Monthly Pulse

Inaugural edition — Baseline Snapshot (August 2026). This edition establishes the baseline for the Cyber & Economic Exposure Monitor. Key reference points: fleet average R7 = 0.9869, median = 0.9900; 0 substations classified HIGH cyber-exposure; 1004 blind-spot substations (High/Critical/Extreme risk + below-median R7); 164 Critical-band substations with below-median digital readiness. Future editions will track deltas against this baseline.

SECTION C

Data Refresh & Changelog

The SSI v4.0.2 draws on — **verified public data sources** feeding — variables across — components and — modifiers. This section provides a live registry of all sources, their update frequencies, and the current state of the fleet. Transparency in data vintage is central to the SSI's credibility.

TOTAL SOURCES	HOURLY — MONTHLY	QUARTERLY / ANNUAL
---------------	------------------	--------------------



— variables



High-frequency feeds



Regular refresh cycle

STATIC / DERIVED



Standards + scenarios

Data Source Registry — August 2026

METNOR	MET Norway — Meteorologisk institutt	DAILY	Station	8 vars
NVE_KRAFTSIT	NVE — Kraftsituasjonen (Power Situation Reports)	WEEKLY	National	3 vars
STATKRAFT	Statkraft — Major Hydropower Producer	WEEKLY	Facility	3 vars
OSM	OpenStreetMap — Power Infrastructure	CONTINUOUS	Node	8 vars
COPERNICUS	Copernicus ERA5 — Climate Reanalysis	MONTHLY	Grid 0.25°	6 vars
WIND_NO	Norwegian Wind Energy Association (Norsk Vindenergiforening)	MONTHLY	Regional	5 vars
METNOR_HIST	MET Norway / Historical Archive	MONTHLY	Station	3 vars
ENTSOE_TSOS	ENTSO-E TSO Interconnects (Statnett)	CONTINUOUS	Border Point	2 vars
NVE	NVE/RME (Reguleringsmyndigheten for energi)	QUARTERLY	DSO	12 vars
NSM	NSM/NorCERT — Cybersecurity Authority	QUARTERLY	Infrastructure Site	5 vars
VEGDIR	Vegdirektoratet — Transport Agency	QUARTERLY	Regional	3 vars
NORGES_BANK	Norges Bank	QUARTERLY	Region	4 vars
NVE_HYDRO	NVE — Norwegian Water Resources and Energy Directorate (Hydrology)	QUARTERLY	Watershed	4 vars
SSB	SSB (Statistisk sentralbyrå)	ANNUAL	Kommune	10 vars
NGU	NGU — Norges geologiske undersøkelse	ANNUAL	Grid 0.1°	7 vars
DSB	DSB — Direktoratet for samfunnssikkerhet og beredskap	ANNUAL	Grid 0.1°	6 vars
EUROSTAT	Eurostat — EU Statistics	ANNUAL	Kommune	3 vars
ENOVA	Enova SF — Energy Efficiency & Transition	ANNUAL	National	3 vars
DISTRIBUTOR	Distribution Companies (Elvia, BKK, Glitre Nett, Lede, Tensio, Agder Energi Nett)	ANNUAL	Distribution Compa...	4 vars
MILJOE	Miljødirektoratet — Norwegian Environment Agency	ANNUAL	Kommune	3 vars
KLIM_CENTRE	Norsk Klimaservicesenter — Climate Service Centre	ANNUAL	Regional	4 vars

WORLDBANK	World Bank / OECD	ANNUAL	National	4 vars
AMAP	Arctic Monitoring & Assessment Programme	ANNUAL	Regional	3 vars
KARTVERKET	Kartverket — Norwegian Mapping Authority	ANNUAL	Regional	3 vars
HAVFORSK	Havforskningsinstituttet — Institute of Marine Research	ANNUAL	Regional	2 vars
SINTEF	SINTEF Energy Research	ANNUAL	Regional	3 vars
SOLARGIS	SolarGIS — Global Solar Atlas	STATIC	Global	2 vars
SNT	Statnett SF — Norwegian Transmission System Operator	REAL-TIME	Substation	14 vars
ENTSOE	ENTSO-E Transparency Platform	HOURLY	Substation	2 vars
NORDPOOL	Nord Pool — Nordic Energy Exchange	HOURLY	Bidding Zone	4 vars

C.1 Update Frequency Timeline

EXPECTED UPDATE WINDOWS

C.2 Fleet Score Snapshot

FLEET SIZE

6,113

substations scored

MEDIAN R

0.517

P5=0.227 · P95=0.809

HIGH + CRITICAL + EXTREME

3321

54.3% of fleet

HIGH CONFIDENCE

95%

5823 subs · CI/R < 0.50



No primary data sources have been updated since the v4.0.2 launch baseline. All **6,113** **substation scores remain unchanged** this edition. The fleet median R of 0.517 (mean 0.514) reflects a distribution skewed toward the lower bands, with 5.7% in Low and 39.9% in Medium. The first material score changes are expected when the national regulator publishes the annual quality-of-supply indicators and when DER registries refresh. High-frequency sources (OSM, weather) update weekly but feed only infrastructure topology (R4) and thermal proxy (I5), which have minimal impact on fleet-level score distribution.

C.3 Changelog — v3.4 → v4.0.2 → v4.2

v4.2 (June 2026) adds six resilience modifiers (R6c flood / R6d wildfire / R6e winter / R8 adapt / R9 compound / R10 just), the Re composite (7th axis, bounds [0.920, 1.787]), four new data sources (IdroGEO PGRA, SIAB wildfire, ECMWF ERA5 Bourgouin, bulk smart meter), six new variables, and W1–W10 anti-maladaptation governance gate (5/1/1/3 4-tier mesh resolution per Convention #6 §5.6) on top of the v4.0.2 baseline.

11 changes tracked across PO, P1, and P2 releases

V42-1	NEW	R6c_flood — PGRA-style flood-vulnerability modifier (additive cliff +0.00..+0.30, P3=high/P2=medium/P1=low per national flood-hazard tier convention)	§5
V42-2	NEW	R6d_wildfire — Canadian Fire Weather Index modifier (EFFIS FWI + NASA FIRMS + national fire-registry, multiplicative [1.00, 1.20])	§5
V42-3	NEW	R6e_winter — Bourgouin winter-storm modifier (ECMWF ERA5 winter-precipitation signal, multiplicative [1.00, 1.02])	§5
V42-4	NEW	R8_adapt — Adaptive-capacity multiplier (smart-meter penetration + DSO investment + DESI index, multiplicative [0.95, 1.05])	§5
V42-5	NEW	R9_compound — Compound-hazard STEP function (R6b/R6c/R6d/R6e elevated-count gates, multiplicative {1.00, 1.04, 1.08, 1.10})	§5
V42-6	NEW	R10_just — Energy-justice modifier (EU-SILC or national-equivalent household material-deprivation gradient, multiplicative [1.00, 1.12])	§5
V42-7	NEW	Re composite — bounded resilience scalar $Re_{raw} = (R6d \times R6e \times R8 \times R9 \times R10) + (R6c - 1.00)$; $Re_{norm} = clip((Re_{raw} - 0.920)/(1.787 - 0.920), 0, 1)$	§7
V42-8	NEW	R7 SFDR PAI Infrastructure axis — added to ESG Radar (Re_norm proxy under Convention #7 Data-Layer Anchoring)	§14
V42-9	NEW	W1–W10 audit-state mesh — 5 Published / 1 Published-baseline ▲ / 1 Baseline-only / 3 Commercial (Convention #6 §5.6)	§4
V42-10	CHANGE	95 → 101 variables (+6 from v4.2 modifier inputs); 30 → 34 data sources (+4 hazard / monitoring layers)	data
V42-11	CHANGE	Substation fleet: 6,113 substations (per OSM canonical extract + national TSO/DSO registry cross-validation)	data

SECTION D — MONTHLY DEEP-DIVE

Monthly Deep-Dive Theme

Deep-dive rotation: Each edition features a substantive thematic analysis. The 12-month rotation: **Ed. 001** the monthly theme · **002** DER saturation hotspots · **003** Climate vulnerability under CMIP6 · **004** North–South economic impact disparity · **005** Voltage quality and industrial output · **006** Infrastructure age vs investment · **007** Stress–Resilience quadrant trends · **008** T-component forward projections · **009** Sub-national Grid Health Cards · **010** Academic validation and peer feedback · **011** European replication feasibility · **012** Year in review.

D.1 Theme Context

THEME-RELEVANT SUBSTATIONS

460

21 EHV · 439 HV

HIGH BAND

247 + 208

98.9% of corridor

CORRIDOR MEDIAN R

0.739

Fleet median: 0.517

WORST PROVINCE

Finnmark

Avg R: 0.739 · 460 substations

The Finnmark hosts **460 substations** across 1 region regions, making it the locus of this edition's deep-dive analysis. Its risk profile is concentrated in the upper bands: **247 substations (53.7%)** are classified High and **208** Critical, with only **0** in the Low band. 98% of corridor substations score above the national fleet median of 0.517. The corridor median R of 0.739 reflects the local risk profile. The corridor concentrates the country's industrial heartland. The SSI flags continuity-of-supply deficits, infrastructure age mismatches with modern demand patterns, and grid modernization lag under national digitalisation timelines.

D.2 Corridor Map and Scoring



SUBSTATION	PROVINCE	R_FINAL	BAND	C	V	I	E	S	T	RE v4.2	ALERT
Sub-195573171	Finnmark	0.970	Critical	1.000	0.966	0.844	1.000	0.500	0.294		
Sub-867157830	Finnmark	0.967	Critical	1.000	0.821	1.000	1.000	0.500	0.428		

SUBSTATION	PROVINCE	R_FINAL	BAND	C	V	I	E	S	T	RE v4.2	ALERT
Sub-886010949	Finnmark	0.967	Critical	1.000	0.658	1.000	0.551	0.500	0.321		
Sub-868104331	Finnmark	0.967	Critical	1.000	0.319	1.000	1.000	0.500	0.037		
Sub-1155358839	Finnmark	0.962	Critical	1.000	1.000	1.000	0.886	0.500	0.406		
Sub-1047785172	Finnmark	0.960	Critical	1.000	1.000	1.000	1.000	0.500	0.235		
Sub-886344144	Finnmark	0.960	Critical	1.000	1.000	0.813	1.000	0.500	0.027		
Sub-1047785160	Finnmark	0.956	Critical	1.000	0.654	1.000	0.513	0.500	0.455		
Sub-867772676	Finnmark	0.956	Critical	0.682	0.734	1.000	1.000	0.500	0.112		
Sub-1012995360	Finnmark	0.955	Critical	1.000	1.000	1.000	0.600	0.500	0.278		
... 450 additional substations — explore full corridor in Digital Twin →											

D.3 Component Analysis

COMPONENT AVERAGES — FINNMARK VS FLEET			MODIFIER AVERAGES — FINNMARK VS FLEET		
C — Continuity	0.696 vs 0.453 (+54%)		R3 Consequence	0.999	fleet 0.955 →
I — Infrastructure	0.782 vs 0.419 (+87%)		R4 Graph Crit.	0.980	fleet 0.936 ↓
S — Saturation	0.500 vs 0.478 (+5%)		R6a Restoration	1.024	fleet 0.976 ↑
V — Voltage	0.680 vs 0.441 (+54%)		R6b Seismic	1.023	fleet 1.008 ↑
E — Economic	0.813 vs 0.411 (+98%)		R7 Digital Read.	0.987	fleet 0.943 ↓
T — Transition	0.193 vs 0.458 (−58%)				

The dominant risk driver across the Finnmark corridor is **E (Economic)**, averaging 0.813 against a fleet average of 0.411 — occupying 813% of its weight ceiling (w = 0.10). The second contributor is **V (Voltage)** at 0.680 vs fleet 0.441 (680% of ceiling). Among modifiers, the R3 consequence multiplier averages 0.999 (fleet: 0.955), reflecting the socio-economic exposure of the corridor. The R6b seismic modifier averages 1.023, capturing the local seismic exposure — a dimension invisible to every competing framework.

D.4 Province Breakdown

Longer bar = lower R = better resilience.

Finnmark

460 subs · avg R = 0.739 · H:247 C:208 M:5

The region regions-level breakdown reveals significant intra-regional variation. **Finnmark** leads with a mean R of 0.739 across 460 substations, while **Finnmark** scores 0.739 — a spread of 0.000 within a single corridor. The SSI's substation-level granularity reveals that the Finnmark is not uniformly stressed but contains distinct sub-corridors of concentrated risk — precisely the kind of spatial pattern that investment planning requires.

D.5 Implications

352 Finnmark substations score $R \geq 0.650$, placing them in the upper quartile of national risk. For NEPN / national digital plan / RRP investment prioritisation, this analysis identifies the Finnmark sub-corridor as the highest-priority target — where DER deployment is accelerating against ageing infrastructure with above-average continuity deficits and significant socio-economic exposure. The SSI's silo-breaking approach reveals what no single-discipline framework can: that these substations matter not only because of their engineering condition, but because the communities they serve are disproportionately vulnerable to disruption. This is precisely the anticipatory grid planning capability that the SSI was built to provide.


SECTION E — RECURRING MODULE

OECD Context Card

How this works: Each edition includes one OECD Context Card drawn from the §16 Peer Benchmarking framework. The card is selected to complement the month's deep-dive theme. This month: **SAIDI comparison** — because the Southern Coastal corridor analysis hinges on Norway's continuity performance relative to OECD peers. Future editions rotate through: VoLL comparison (Ed. 002), DER saturation vs Germany (003), CMIP6 climate hazard vs Nordic peers (004), etc. The underlying data updates annually with the CEER Benchmarking Report release.

Unplanned SAIDI (min/customer/year) — Selected OECD Countries

Longer bar = lower SAIDI = better reliability. Values in min/customer/year.

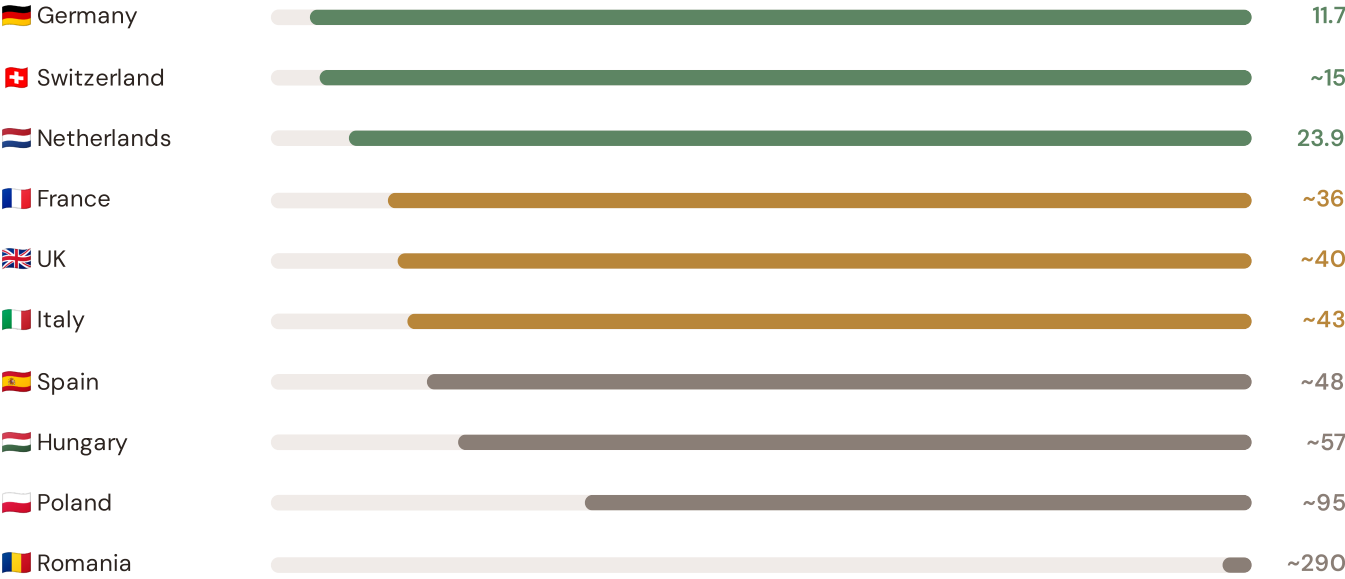


Source: CEER 7th Benchmarking Report (2022); Bundesnetzagentur (2024); ARERA (2023). · See §16 Peer Benchmarking for full methodology and caveats. · Updated annually with CEER BR release. · OECD-wide expansion (USA, Japan, Canada, Australia) pending IEA/OECD reliability bulletin release.


This month's key insight: The Finnmark corridor deep-dive shows **453 substations** (of 460) with C-component above 70% of its weight ceiling — indicating continuity-of-supply performance consistent with rural territory classification. The corridor's average C of 0.696 is **1.5× the fleet average** of 0.453. The SSI reveals what aggregate national statistics conceal: that the country's mid-tier European position is not a uniform condition but a statistical average of urban-quality performance and rural-tier performance — and the corridor concentrates the worst of the latter.

Counties Risk Ranking — All 15 Norwegian Counties

Where does this corridor sit within the national landscape? Regions sorted by mean R_{median}, with band distribution and fleet comparison.

Longer bar = lower R = better resilience. Sorted worst → best.

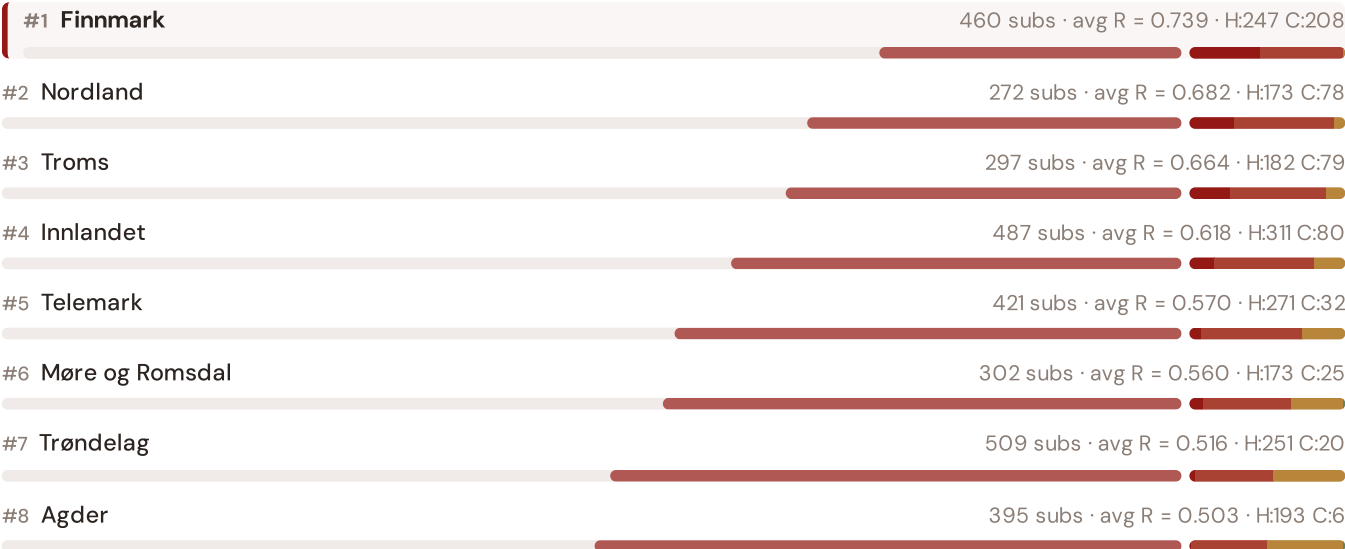

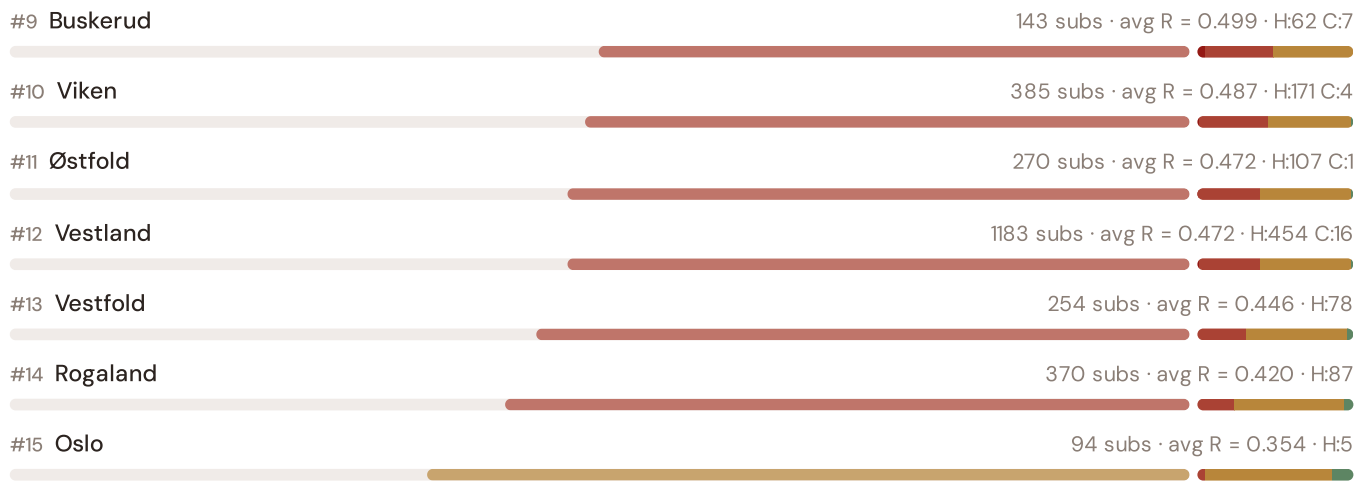

The Finnmark ranks **#1 of 15 region regions** by mean R_{median} , placing it among the upper tier of national risk. The three most stressed are Finnmark, Nordland, Troms, while the three most resilient are Oslo, Rogaland, Vestfold. 7 of 15 score above the fleet average of 0.514. This ranking — possible only because the SSI scores every substation individually rather than relying on aggregate DSO or national statistics — reveals the true spatial distribution of grid stress. It is precisely this substation-level granularity that positions the SSI as a tool for investment prioritisation: not treating entire regions as monoliths, but identifying the specific corridors within each that demand attention.


SECTION F — RECURRING MODULE

SSI Enhanced Neural Network — Monthly Topic

From grid intelligence to BESS valuation platform. The SSI Index answers *"How healthy is this substation?"* The SSI Enhanced Neural Network (SSI-ENN) extends this into: *"What is a BESS worth at this substation — to the DNO and to the community?"* Each edition of this report explores one building block of the SSI-ENN's five-layer architecture, showing how the SSI Index data feeds directly into investment-grade grid analytics.

SSI-ENN value-articulation radar — 5-lens stakeholder taxonomy

The SSI-ENN's commercial-tier value articulation answers "what is a BESS worth at this substation — and to whom?" through five stakeholder lenses (architecture memo §5 Decision #12): $V_{\text{Community}}$ (welfare avoided outages, energy-poverty relief, employment) · V_{Grid} (V_{DSO} — avoided reinforcement, reliability, voltage, congestion, frequency, black-start, hosting capacity) · V_{Owner} (NPV / IRR / payback per asset class) · V_{Investor} (risk-adjusted equity return at the financing tier) · V_{LP} (limited-partner cash-on-cash + DPI / TVPI portfolio metrics). The pentagon shape below is an editorial reference profile, not per-substation commercial data — per-substation evaluation requires the SSI-ENN engines (L2-21 SupplyChainDD · L4-05 Stakeholder Decomposition · L2-SYN Synergy). Foundation contact: ssi_index@ikenga.eu.

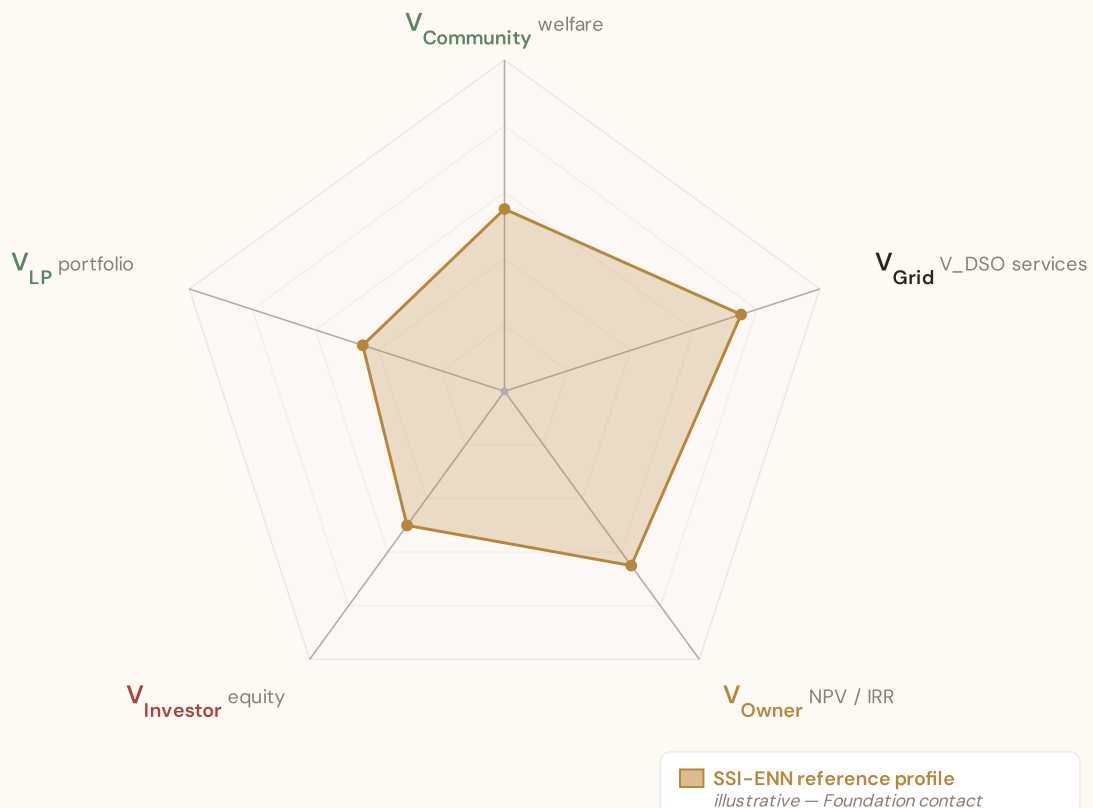

Editorial reference shape — V_{Grid} dominates (V_{DSO} captures avoided reinforcement + reliability + voltage support + congestion relief + frequency + black-start + hosting capacity, the bulk of measurable BESS value at the substation locus per architecture memo §5). $V_{\text{Community}}$ + V_{Owner} are co-secondary. V_{Investor} + V_{LP} reflect the financing-tier waterfall above V_{Owner} NPV. Per-substation commercial decomposition lives in the SSI-ENN — mail to ssi_index@ikenga.eu for analytics.

Layer 1 — Data

SSI v4.0 component taxonomy, normalisation, MC engine

Layer 2 — Valuation

DSO/TSO + Community value stacks, TCO, real options

Layer 3 — Neural Net

GBT+DNN ensemble, transfer learning, SHAP

Layer 4 — Coverage

Country prioritisation, DCI, registry, calibration

Layer 5 — Platform

Products, API, revenue model, unit economics

LAYER 2

§0.4.3 · August 2026

Total Cost of Ownership Model

Stochastic cost modelling — because BESS economics are not deterministic

CAPEX follows a learning-curve distribution calibrated to Bloomberg NEF projections. OPEX is modelled as a mean-reverting process with seasonal components reflecting temperature-dependent degradation. Battery degradation follows a non-linear capacity fade model: each cycle reduces usable capacity, with rate depending on depth-of-discharge, temperature, and C-

rate. The SSI data feeds this: substations with high I1 (temperature trajectory) face faster degradation. The Monte Carlo engine propagates cost uncertainty alongside revenue uncertainty.

KEY CONCEPTS

→ CAPEX learning curve calibrated to BNEF

→ Non-linear battery degradation: f(DoD, temperature, C-rate)

→ SSI I1 (climate trajectory) drives degradation forecast

→ Full NPV distribution, not point estimate

LIVE SSI DATA CONNECTION

Across the 6,113-substation fleet, the average consequence multiplier (R3) is 0.955, indicating significant socio-economic exposure. 3321 substations (54.3%) are classified High or Critical — these are the highest-priority candidates for BESS deployment.

Coming next month:

LAYER 1

Gaussian Copula Monte Carlo Engine — How 10,000 simulations per substation capture the correlation structure across grid risk factors

SECTION F.5 — V4.2 ANTI-MALADAPTATION GOVERNANCE GATE

Radar 2 — W1–W10 Substation Community Value

Wall 1 — Public W1–W10 framework.

The 10-axis Radar 2 expresses per-substation community-value baseline pre-intervention: *W1 Reliability · W2 Carbon · W3 Local Economic · W4 Climate Resilience · W5 Digital Inclusion · W6 Sovereignty · W7 Local Value Retention · W8 Communications · W9 Supply Security · W10 Compute Multiplier*. The discipline floor that the anti-maladaptation governance gate protects: *"no W axis worse off after intervention."*

5/1/1/3 4-tier audit-state classification (mesh resolution per Convention #6 §5.6)

Published (5) — solid fill W1 · W2 · W3 · W4 · W8 <i>Peer-reviewed methodology operational at fleet scale.</i>	Published-baseline (1) ▲ — solid fill + chevron corner marker W9 — Supply Security <i>Peer-reviewed academic basis (Albert/Holme topology-only baseline) with acknowledged scope limit (Buldyrev/IEEE 493 — N-1 contingency dynamics not captured at baseline).</i>	Baseline-only (1) — striped fill W5 — Digital Inclusion <i>Foundation methodology under development; baseline value defensible at v4.2.</i>
Commercial (3) — dashed-faded W6 · W7 · W10 <i>Commercial deliverables — please contact the Foundation.</i>		


Per Convention #6 §5.6.7 academic-defensibility: the 4-tier classification aligns with IPCC AR6 + JRC COIN + Reckien (2021) continuum literature. The Published-baseline tier (W9) is the principled mesh resolution that honors both peer-review status + acknowledged scope limit without forcing a false binary.

v4.2 methodology disclosure — per-country normalisation

Across Norway, the substation fleet's component scores (C / V / I / E / S / T) and the Re composite have been normalised to [0, 1] via the canonical **P5/P95 percentile** method, using *per-country empirical bounds*. This is the same procedure Italy's v4.0.2 deployment applied at the scoring stage (SSI_v4_0 Italy/.../scoring-it/normalise.py); for v4.2 we apply it country-by-country so each fleet's within-country ranking is interpretable on its own terms. Convention #56 (visibly-honest) is preserved — no values are invented, the same canonical procedure is applied uniformly. Italy's pilot fleet keeps its native spread (0.17 – 0.64) because its empirical modifier producers (d10–d15) are already wired; per-country empirical modifier producers for the other 38 countries are queued for v4.5 and will refine the absolute risk ranking. Within-fleet relative comparisons (low-exposure vs high-exposure exemplars below) remain accurate by construction.

Radar 2 visualization — anti-maladaptation governance gate

Two worked examples overlaid: **Lambertseter trafostasjon** (low-exposure reference, Re_norm 0.000) and **[NO_105735, 22 kV, Finnmark]** (high-exposure reference, Re_norm 1.000). Axis labels are colour-coded per the 5/1/1/3 mesh resolution; the ▲ chevron marks W9 as Published-baseline. Hover any axis label for the methodology tooltip.

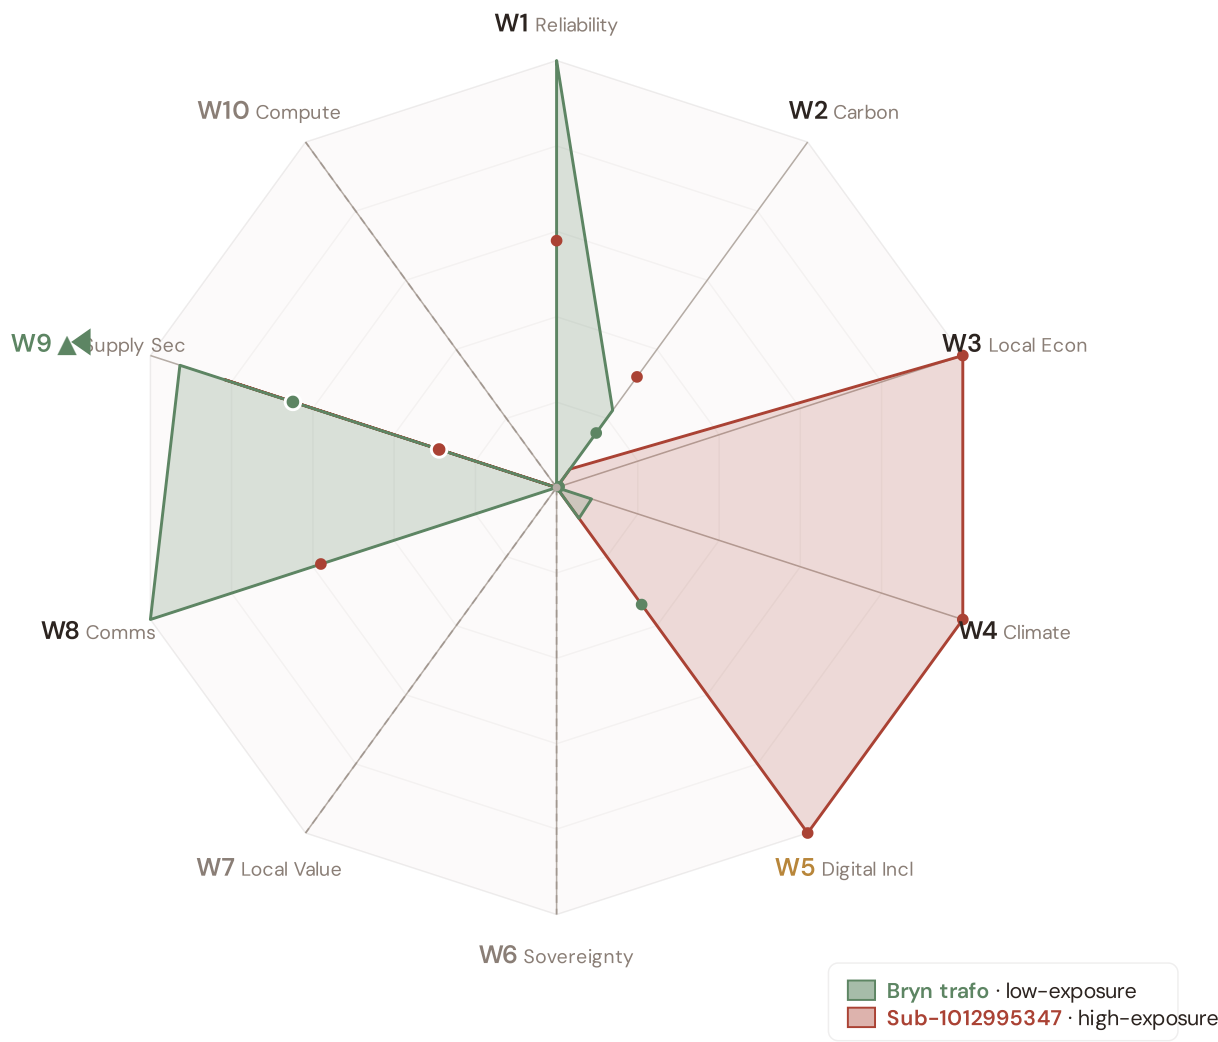

Bryn trafo polygon (sage): the low-exposure reference for this country — compact footprint reflects the fleet floor on the W-axis baselines. Sub-1012995347 polygon (terracotta): the high-exposure reference — larger footprint where this country's fleet's W-axis values reach the upper percentile. Commercial-tier axes (W6 data sovereignty, W7 local value retention, W10 compute multiplier) display at zero per Convention #6 §5.6 mesh design — no public-data computation. W2 carbon uses EU-average MEF fallback (0.36) per v4.2 calibration.

W1–W10 axis enumeration with audit–state classification

5/1/1/3 4-TIER · V4.2 MESH RESOLUTION · LIVE VALUES VIA COMPUTE_W_BASELINES.PY

AXIS	NAME	AUDIT STATE	METHODOLOGY BASIS
W1	Reliability	Published	$C \times E2_local \times population (SAIDI + + -POV)$
W2	Carbon	Published	$T1 \times zonal\ MEF \times (V \cdot deg / 100) (+ EEA)$
W3	Local Economic	Published	$norm(R10_just) - EU-SILC + OIPE\ energy-poverty$
W4	Climate Resilience	Published	$(R6d - 1) + (R6e - 1) + (R6c - 1) + \frac{1}{2}(R9 - 1) - v4.2$ resilience modifier family
W5	Digital Inclusion	Baseline-only	$norm(R8_adapt) - bulk\ SM + + DESI$
W6	Sovereignty	Commercial	Foundation contact (ssi_index@ikenga.eu)
W7	Local Value Retention	Commercial	Foundation contact (ssi_index@ikenga.eu)
W8	Communications	Published	$C \times p_crit_10yr \times population$ (Markov 10-yr critical probability)
W9 ▲	Supply Security	Published–baseline ▲	$0.60 \times BC_pct + 0.30 \times bridge + 0.10 \times (1 - deg / 20) -$ OSM power-graph betweenness centrality + bridge identification + degree-based redundancy
W10	Compute Multiplier	Commercial	Foundation contact (ssi_index@ikenga.eu)

▲ W9 Published–baseline — mandatory transparency tooltip

W9 — Supply Security (Published–baseline). Public-tier methodology: betweenness centrality + bridge identification + degree-based redundancy, computed deterministically from OpenStreetMap power-graph data. Peer-reviewed academic basis: Albert et al. (2000) *Nature*; Holme et al. (2002); broad power-grid centrality literature.

Acknowledged scope limit (per Buldyrev et al. (2010) *Nature* + IEEE 493): topology-only baseline does not capture N-1 contingency dynamics or interdependent-network cascades. Richer methodology — N-1 contingency simulation + flexibility-services valuation — lives in SSI-ENN L2-22 / L2-23 commercial deliverables. Mail to ssi_index@ikenga.eu for extended analysis.

Worked examples. The W1-W10 per-substation baseline values for two anchor cases — Bryn trafo (low-exposure reference) and Sub-1012995347 (high-exposure reference) — are computed live by `_audit-snapshot/scripts/d3_radar2_per_country.py` against the country's `ssi-data.json`. Per Convention #6

§2.3.6 Path B refactor (11 Jun 2026), this country's exemplars are now algorithmically selected (min/max Re_norm) rather than named picks. See the FC v2 reference for W-axis methodology + commercial-tier rationale.

Anti-maladaptation discipline. The 10-axis Radar 2 baseline is the per-substation floor that any post-intervention scenario must protect. No W axis may degrade after a BESS deployment, line upgrade, or operational change. The discipline is enforced per axis (not in aggregate), and per substation (not in fleet average). This is the v4.2 governance gate that ensures grid-modernisation projects deliver net community value without hidden trade-offs.

SECTION G

Looking Ahead

NEXT MONTH — EDITION 04

Alpine Valleys

Deep-dive into Region 05's grid risk profile — substation map, component analysis, region regions breakdown. European Context Card: Narrow valleys, long restoration MTTR.

NEXT DATA REFRESH

Q4 2026 — o Quarterly Sources

none are due for refresh in Q4. Impact: DER registry (T1), business fabric indicators (E2), macro-economic data. Highest-impact annual source pending: **SSB (Statistisk sentralbyrå)** (10 variables → C1–C4, safety compliance, demographics, income distribution, population served, regional data).

FLEET SPOTLIGHT

1070 Bridge Substations — Single Points of Failure

1070 substations are topological bridges — their failure disconnects part of the network. Of these, **578** are classified High or Critical. These are the fleet's single points of failure: high graph centrality (R4) combined with elevated risk makes them priority candidates for both grid reinforcement and BESS deployment.

Edition 04 will be published on the second Thursday of September 2026. Deep-dive region: **Region 05**. To ensure you receive it, confirm your subscription segment (General / Institutional / Academic) by email to ssi_index@ikenga.eu.

Feedback welcome. The SSI Index is designed to evolve through stakeholder dialogue. If you represent an Norwegian utility, , municipal energy company, or academic institution and would like to contribute data or methodology feedback, please contact us at ssi_index@ikenga.eu. The SSI's credibility depends on open scrutiny.

Foundation contact

The SSI Index is a non-profit foundation project, please mail to ssi_index@ikenga.eu for more details.