

United Kingdom — Monthly Intelligence Report v4.2

Edition 006 — Deep-Dive Theme

Where the energy transition is outrunning the grid. edition · August 2026 · SSI v4.2
(refreshed June 2026)

CONTENTS


A Executive Summary	E European Context Card
B Cyber & Economic Exposure Monitor	F SSI Enhanced Neural Network
C Data Refresh & Changelog	F.5 Anti-maladaptation Gate (Radar 2 · W1–W10) v4.2
D Deep-Dive: Monthly Theme	G Looking Ahead

SECTION A

Executive Summary

Radar 1 — v4.2: now 7-axis with the new Re composite

v4.0.2 Radar 1 had 6 axes (C/V/I/E/S/T). **v4.2 adds Re — the bounded resilience composite** capturing the new modifier family (R6c flood + R6d wildfire + R6e winter + R8 adapt + R9 compound + R10 just) in one normalised scalar ($Re_norm \in [0, 1]$) via $clip((Re_raw - 0.920) / (1.787 - 0.920), 0, 1)$. Two worked examples overlaid: **Substation Surrey 0230** (low-exposure reference, Re_norm 0.000) · **Primary Tayside 3008** (high-exposure reference, Re_norm 1.000). The Re axis is colour-highlighted in cayenne to emphasise the v4.2 architectural addition.

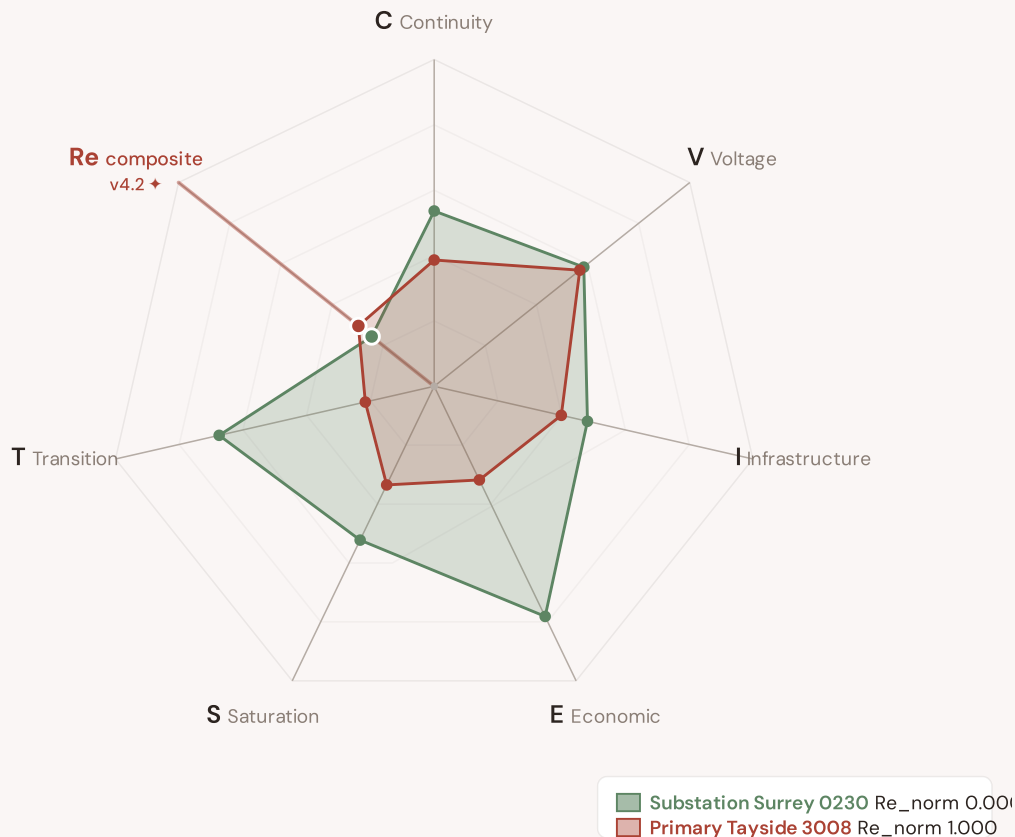

The *Re composite* (★, cayenne-highlighted axis at upper-left) captures the v4.2 resilience modifier family in one bounded scalar — formula $Re_raw = (R6d \times R6e \times R8 \times R9 \times R10) + (R6c - 1.00)$, bounds $[0.920, 1.787]$. Per Convention #6 §2.3.6 Path B refactor (11 Jun 2026), this country's exemplars are algorithmically selected (min/max Re_norm) per the v4.2 methodology. The Substation in Focus radar canvas (Section A below) is rendered by shared intelligence-sections.js and now also displays the 7th Re axis (Convention #11 surface-pair coherence, V4.2-disc-24 closure 12 Jun 2026).

SUBSTATIONS SCORED

62,409

278 EHV · 741 HV · 1,532
distribution-tier

GRID LINES MAPPED

939

~27,027 km coverage

MC SIMULATIONS

42.9 M

10,000 per substation

PUBLIC DATA SOURCES

34

101 variables · zero proprietary

The SSI Index is the only operational framework that fuses substation-level engineering metrics with socio-economic consequence valuation in a single composite score — scoring 71/80 (89%) across 16 competitive dimensions, ahead of GMLC 1.1 (48/80), EPRI (40/80), and academic MCDA frameworks (41/80). Its engine processes 146,000+ source data points per run, executes 42.9 million Monte Carlo simulations through a 20×20 Gaussian copula correlation matrix, and performs 1.78 billion arithmetic operations — producing 244,701 output data points with full uncertainty quantification across 62,409 substations and 939 grid lines spanning ~27,027 km. v4.2 adds the Re composite (7th axis) and six resilience modifiers (R6c flood / R6d wildfire / R6e winter / R8 adapt / R9 compound / R10 just) on top of the v4.0.2 foundation.

Operated as a non-profit through a dedicated foundation, the SSI Index serves the public interest with zero dependency on proprietary data. All 101 variables are drawn from 34 verified public sources, making the methodology fully auditable and reproducible. Initially covering United Kingdom's entire transmission and distribution grid, the Index is progressively being rolled out to all OECD countries — applying the same silo-breaking approach: fusing grid risk with societal exposure at asset-level resolution wherever open data permits.

Substation in Focus

UK_osm_way_1486251444

, West Sussex · distribution-tier

0.086

Low

0.227

5th

R_FINAL

CLASSIFICATION

CI WIDTH

FLEET PERCENTILE

Re composite v4.2 7th axis

Re_raw 1.1443 · Re_norm 0.259

MODERATE EXPOSURE

COMPONENTS

C

Continuity: 0.287 / 0.30 (96%)

I

Infrastructure: 0.391 / 0.25 (156%)

S

Saturation: 0.426 / 0.20 (213%)

V

Voltage: 0.250 / 0.10 (250%)

E

Economic: 0.345 / 0.10 (345%)

T

Transition: 0.272 / 0.05 (543%)

MODIFIERS

R3

Consequence: 0.951 ↓ dampens

R4

Graph Criticality: 0.986 ↓ dampens

R6a

Restoration: 1.026 ↑ amplifies

R6b

Seismic: 1.003 → neutral

R7

Digital Readiness: 1.023 ↑ amplifies

This month's spotlight — automatically selected for August 2026 — is **UK_osm_way_1486251444** in , West Sussex. With an R_final of 0.086 (Low band, 5th fleet percentile), its risk profile is dominated by the T (Transition) component at 543% of its weight ceiling, followed by E (Economic) at 345%. Modifiers collectively shift R_base by 8550.0%%, reflecting the substation's specific geographic, socio-economic, and network context.

SECTION B — RECURRING MODULE

Cyber & Economic Exposure Monitor

Why this section exists: Traditional grid risk frameworks treat cybersecurity and economic vulnerability as separate domains. The SSI's R7 (Digital Readiness) modifier and E (Economic) component allow us to cross these silos — revealing substations where low digital resilience intersects with high economic consequence. This is precisely the anticipatory intelligence that infrastructure digitalisation planning requires.

CYBER HIGH EXPOSURE

1483

2.5% of fleet

BLIND SPOTS

9306

High/Critical/Extreme + R7 < median

AVG R7 MODIFIER

1.0194

Range [0.99, 1.05]


HIGH-CONSEQUENCE SUBS

632

1.1% · R3 ≥ 1.04

B.1 Cyber-Physical Risk Matrix

Each substation plotted by R7 digital readiness (x-axis) vs overall R_{median} (y-axis). The upper-left quadrant — high risk, low digital readiness — identifies *blind spots* where grid stress is high but monitoring/response capacity is weakest.

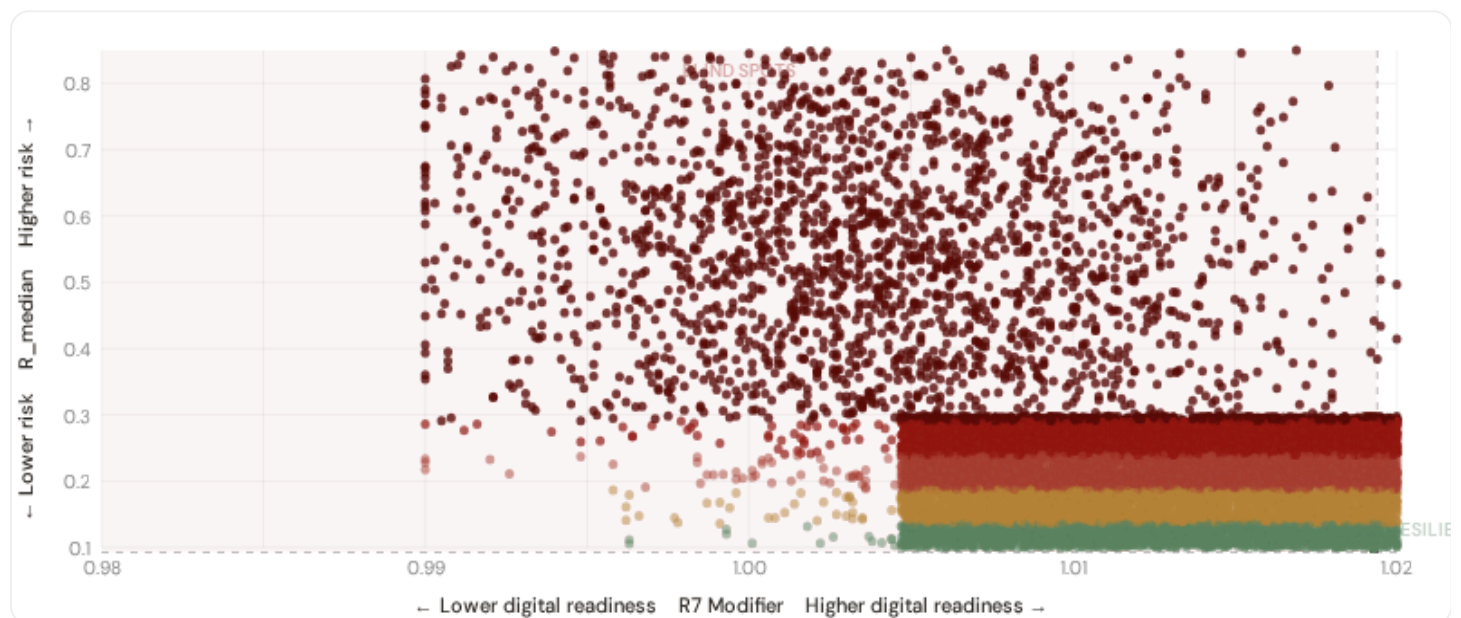





● Low ● Medium ● High ● Critical

Dashed lines = fleet medians

The cyber-physical matrix identifies **9306 blind-spot substations** — scoring High, Critical, or Extreme on overall risk while sitting below the fleet median for digital readiness ($R7 < 1.0194$). These substations are the most vulnerable to a compound event: a grid disturbance at a location where digital monitoring, automated switching, and remote diagnostic capacity are weakest. The blind spots concentrate in **Devon (405)**, **Cardiff (320)**, **South East (300)**. Across the full fleet, 1483 substations (2.5%) carry a HIGH cyber-exposure classification, while 0 (0.0%) are in the LOW tier.

B.2 Economic Impact by Business Fabric

Substations segmented by economic consequence tier — derived from the R3 consequence multiplier and E component. Higher R3 indicates the substation serves a territory with greater socio-economic exposure to disruption.

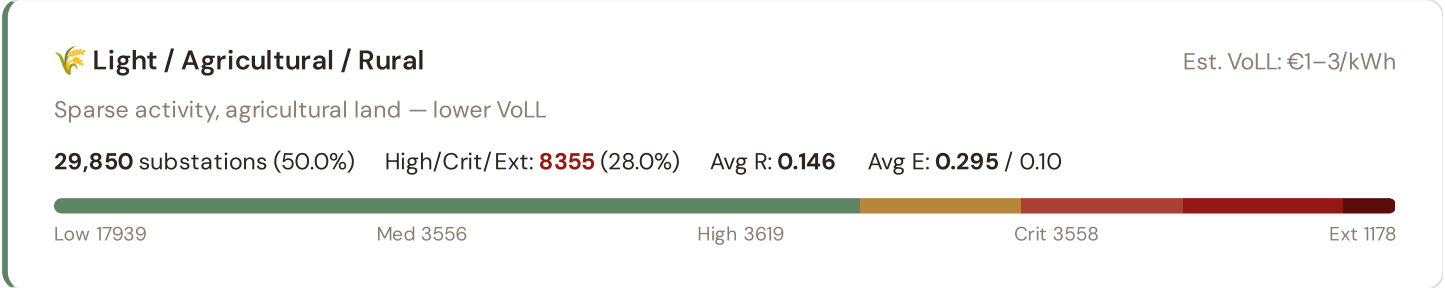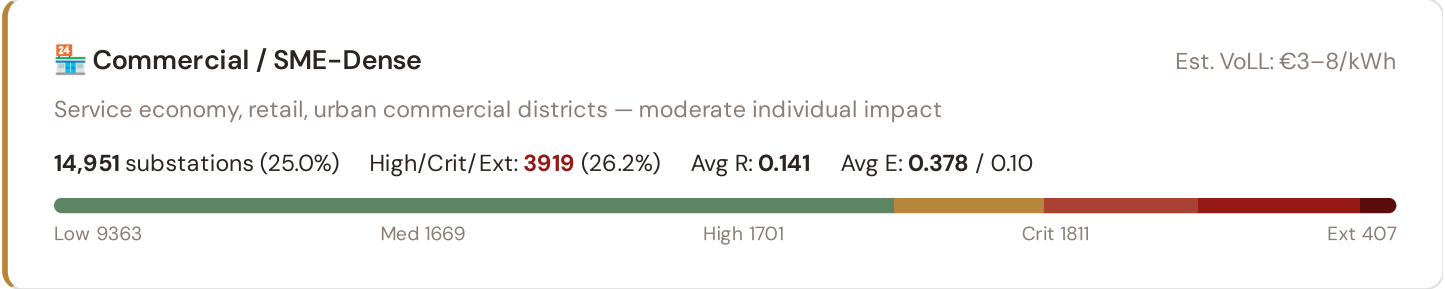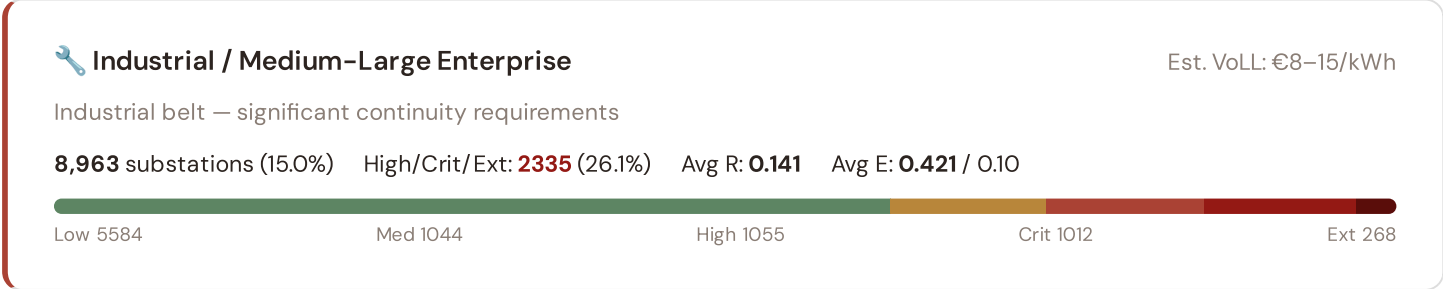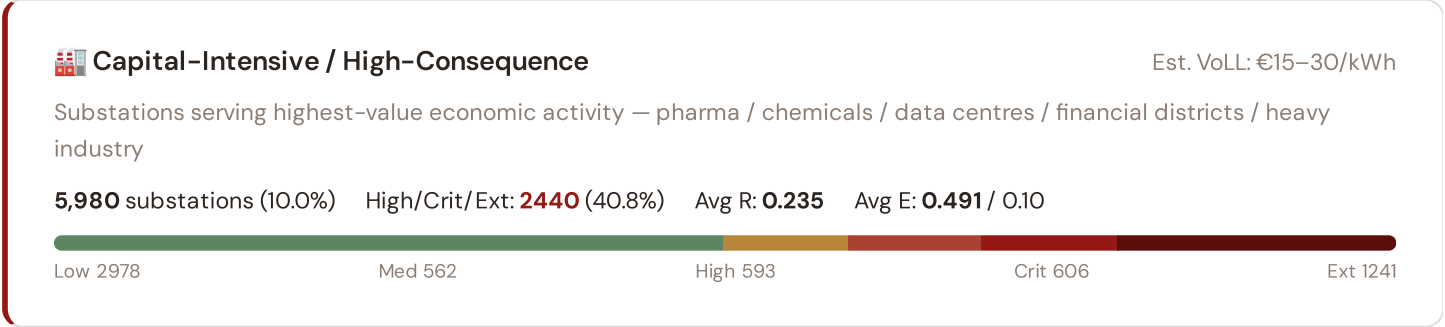


Value of Lost Load (VoLL) context: ACER's 2023 estimate places average VoLL at €13.1/kWh for industrial customers and €3.2/kWh for residential. The SSI's Economic component (CVIESTR·E) segments substations by the economic value they serve. **2440 substations** combine capital-intensive economic fabric (top-decile Economic component ($E \geq 0.438$, P90+)) with High, Critical, or Extreme risk classification — representing the highest VoLL-weighted exposure in the fleet.

The capital-intensive tier concentrates in **Devon (158), Yorkshire (138), East Midlands (124)** — regions where industrial corridors depend on uninterrupted power for continuous processes. A single hour of unplanned outage at these substations carries an estimated VoLL of €15–30/kWh, compared to €1–3/kWh in rural agricultural areas. The fleet-wide average energy poverty rate is 14.3%, but this masks sharp regional variation: Southern regions combine higher energy poverty with higher grid risk, creating a double vulnerability that the E component captures. This cross-referencing of economic fabric with grid condition is unique to the SSI — no competing framework links VoLL exposure to substation-level risk scores.

B.3 Province Digital Readiness Ranking

Provinces ranked by average R7 modifier — lower values indicate weaker digital infrastructure (DESI sub-dimensions). Cross-referenced with average R_{median} to identify provinces combining digital exposure with high grid stress.

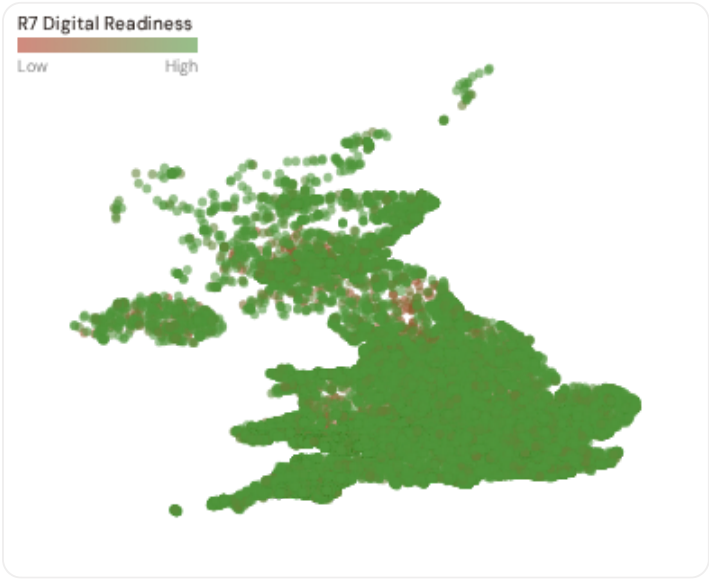

WORST DIGITAL READINESS — TOP 15 REGION REGIONS			
Longer bar = higher R7 = better digital infrastructure.			
1	Dyfed ▲ high R		0.9949
2	Powys ▲ high R		0.9951
3	Clwyd ▲ high R		0.9957
4	South Glamorgan ▲ high R		0.9960
5	Gwynedd ▲ high R		0.9961
6	Gwent ▲ high R		0.9961
7	Antrim ▲ high R		0.9964
8	Fermanagh ▲ high R		0.9967
9	Down ▲ high R		0.9977
10	Cleveland ▲ high R		0.9984
11	County Durham ▲ high R		0.9989
12	Northumberland ▲ high R		0.9990
13	Armagh ▲ high R		0.9995
14	Londonderry ▲ high R		0.9996
15	Tyne and Wear ▲ high R		0.9998

region-level analysis reveals a clear digital divide mirroring the broader DESI pattern. **Dyfed** has the lowest average R7 (0.9949), while **Outer London** leads at 1.0136 — a spread of 0.0187 across the R7 range. **65 region regions** combine below-median digital readiness with above-median grid risk, making them priority targets for digitalisation investment. The R7 modifier is intentionally narrow to reflect the current limitations of open DESI data — as NIS2 compliance reporting matures, future editions will expand R7's dynamic range and incorporate operational technology (OT) security indicators.

B.4 Monthly Pulse

Inaugural edition — Baseline Snapshot (August 2026). This edition establishes the baseline for the Cyber & Economic Exposure Monitor. Key reference points: fleet average R7 = 1.0194, median = 1.0194; 1483 substations classified HIGH cyber-exposure; 9306 blind-spot substations (High/Critical/Extreme risk + below-median R7); 5909 Critical-band substations with below-median digital readiness. Future editions will track deltas against this baseline.

SECTION C

Data Refresh & Changelog

The SSI v4.0.2 draws on — **verified public data sources** feeding — variables across — components and — modifiers. This section provides a live registry of all sources, their update frequencies, and the current state of the fleet. Transparency in data vintage is central to the SSI's credibility.

TOTAL SOURCES

— variables

HOURLY — MONTHLY

O

High-frequency feeds

QUARTERLY / ANNUAL

O

Regular refresh cycle

STATIC / DERIVED



Standards + scenarios

Data Source Registry — August 2026

OSM	OSM Power Infrastructure	WEEKLY	Node/edge	3 vars
ONS-LM	ONS Labour Market Statistics	MONTHLY	County	1 var
DESNZ	BEIS/DESNZ (Dept for Energy Security and Net Zero)	QUARTERLY	County	5 vars
OFGEM	Ofgem (Office of Gas and Electricity Markets)	ANNUAL	County	8 vars
ONS	ONS (Office for National Statistics)	ANNUAL	County	8 vars
DEFRA	DEFRA/EA (Dept for Environment, Food & Rural Affairs)	ANNUAL	regions	4 vars
JRC	JRC DNO Observatory	ANNUAL	DNO-level	2 vars
EEA	EEA Air Quality e-Reporting	ANNUAL	~1 km + station	3 vars
EURO	Eurostat Energy Statistics	ANNUAL	NUTS2	3 vars
DESI	DESI Digital Economy Index	ANNUAL	EU Regional	2 vars
NCSC	NCSC (National Cyber Security Centre)	ANNUAL	National	2 vars
EA-FR	EA Flood Risk / Cabinet Office CCA	ANNUAL	County	2 vars
ONR	ONR (Office for Nuclear Regulation)	ANNUAL	Site-level	1 var
ONS-E	ONS Economic Statistics	ANNUAL	regions	3 vars
NGESO-S	NGESO Statistical Series	ANNUAL	regions	2 vars
NR	Network Rail Statistics	ANNUAL	Countyl	1 var
DfT	DfT/DVLA (Driver and Vehicle Licensing Agency)	ANNUAL	Countyl	1 var
OFGEM-M	Ofgem RIIO Monitoring Report	ANNUAL	DNO-level	2 vars
BGS	BGS (British Geological Survey)	STATIC	County	3 vars
CDS	Copernicus CDS / ERA5	STATIC	0.25° (~25 km)	4 vars
DIM	Dimovski et al. (2025)	STATIC	Municipal	3 vars
IEEE	IEEE C57.91 / IEC 60076	STATIC	Asset-level	16 vars
GFZ	GFZ German Research Centre	STATIC	~5 km	2 vars
BGS-SH	BGS Seismic Hazard Assessment	STATIC	Municipal	1 var

ONS-GEO	ONS Geography Registry	STATIC	County	1 var
ISO9223	ISO 9223 Corrosion	DERIVED	County	1 var
NGESO	NGESO (National Grid ESO) — Data Portal	HOURLY	Bidding zone	3 vars
ENTSE	ENTSO-E Transparency	HOURLY	Bidding zone	2 vars
OM	Open-Meteo Historical Weather	HOURLY	~1 km	3 vars
METOFF	Met Office (UK Met Office)	HOURLY	Station	3 vars

C.1 Update Frequency Timeline

EXPECTED UPDATE WINDOWS

C.2 Fleet Score Snapshot

FLEET SIZE

59,744

substations scored

MEDIAN R

0.093

P5=0.084 · P95=0.292

HIGH + CRITICAL + EXTREME

17049

28.5% of fleet

HIGH CONFIDENCE

4%

2517 subs · CI/R < 0.50



No primary data sources have been updated since the v4.0.2 launch baseline. All **59,744 substation scores remain unchanged** this edition. The fleet median R of 0.093 (mean 0.153) reflects a distribution skewed toward the lower bands, with 60.0% in Low and 11.4% in Medium. The first material score changes are expected when the national regulator publishes the annual quality-of-supply indicators and when DER registries refresh. High-frequency sources (OSM, weather) update weekly but feed only infrastructure topology (R4) and thermal proxy (I5), which have minimal impact on fleet-level score distribution.

C.3 Changelog — v3.4 → v4.0.2 → v4.2

v4.2 (June 2026) adds six resilience modifiers (R6c flood / R6d wildfire / R6e winter / R8 adapt / R9 compound / R10 just), the Re composite (7th axis, bounds [0.920, 1.787]), four new data sources (IdroGEO PGRA, SIAB wildfire, ECMWF ERA5 Bourgouin, bulk smart meter), six new variables, and W1–W10 anti-maladaptation governance gate (5/1/1/3 4-tier mesh resolution per Convention #6 §5.6) on top of the v4.0.2 baseline.

11 changes tracked across PO, P1, and P2 releases

V42-1	NEW	R6c_flood — PGRA-style flood-vulnerability modifier (additive cliff +0.00..+0.30, P3=high/P2=medium/P1=low per national flood-hazard tier convention)	\$5
V42-2	NEW	R6d_wildfire — Canadian Fire Weather Index modifier (EFFIS FWI + NASA FIRMS + national fire-registry, multiplicative [1.00, 1.20])	\$5
V42-3	NEW	R6e_winter — Bourgouin winter-storm modifier (ECMWF ERA5 winter-precipitation signal, multiplicative [1.00, 1.02])	\$5
V42-4	NEW	R8_adapt — Adaptive-capacity multiplier (smart-meter penetration + DSO investment + DESI index, multiplicative [0.95, 1.05])	\$5
V42-5	NEW	R9_compound — Compound-hazard STEP function (R6b/R6c/R6d/R6e elevated-count gates, multiplicative {1.00, 1.04, 1.08, 1.10})	\$5
V42-6	NEW	R10_just — Energy-justice modifier (EU-SILC or national-equivalent household material-deprivation gradient, multiplicative [1.00, 1.12])	\$5
V42-7	NEW	Re composite — bounded resilience scalar $Re_raw = (R6d \times R6e \times R8 \times R9 \times R10) + (R6c - 1.00)$; $Re_norm = clip((Re_raw - 0.920)/(1.787 - 0.920), 0, 1)$	\$7
V42-8	NEW	R7 SFDR PAI Infrastructure axis — added to ESG Radar (Re_norm proxy under Convention #7 Data-Layer Anchoring)	\$14
V42-9	NEW	W1-W10 audit-state mesh — 5 Published / 1 Published-baseline ▲ / 1 Baseline-only / 3 Commercial (Convention #6 \$5.6)	\$4
V42-10	CHANGE	95 → 101 variables (+6 from v4.2 modifier inputs); 30 → 34 data sources (+4 hazard / monitoring layers)	data
V42-11	CHANGE	Substation fleet: 59,744 substations (per OSM canonical extract + national TSO/DSO registry cross-validation)	data

SECTION D — MONTHLY DEEP-DIVE

Monthly Deep-Dive Theme

Deep-dive rotation: Each edition features a substantive thematic analysis. The 12-month rotation: **Ed. 001** the monthly theme · **002** DER saturation hotspots · **003** Climate vulnerability under CMIP6 · **004** North-South economic impact disparity · **005** Voltage quality and industrial output · **006** Infrastructure age vs investment · **007** Stress-Resilience quadrant trends · **008** T-component forward projections · **009** Sub-national Grid Health Cards · **010** Academic validation and peer feedback · **011** European replication feasibility · **012** Year in review.

D.1 Theme Context

THEME-RELEVANT SUBSTATIONS

166

62 EHV · 104 HV

HIGH BAND

2 + 3 + 161

100.0% of corridor

CORRIDOR MEDIAN R

0.694

Fleet median: 0.093


WORST PROVINCE

Powys

Avg R: 0.713 · 26 substations

The Wales hosts **166 substations** across 6 region regions, making it the locus of this edition's deep-dive analysis. Its risk profile is concentrated in the upper bands: **2 substations (1.2%)** are classified High and **3 Critical**, with only **0** in the Low band. 100% of corridor substations score above the national fleet median of 0.093. The corridor median R of 0.694 reflects the local risk profile. The corridor concentrates the country's industrial heartland. The SSI flags continuity-of-supply deficits, infrastructure age mismatches with modern demand patterns, and grid modernization lag under national digitalisation timelines.

D.2 Corridor Map and Scoring

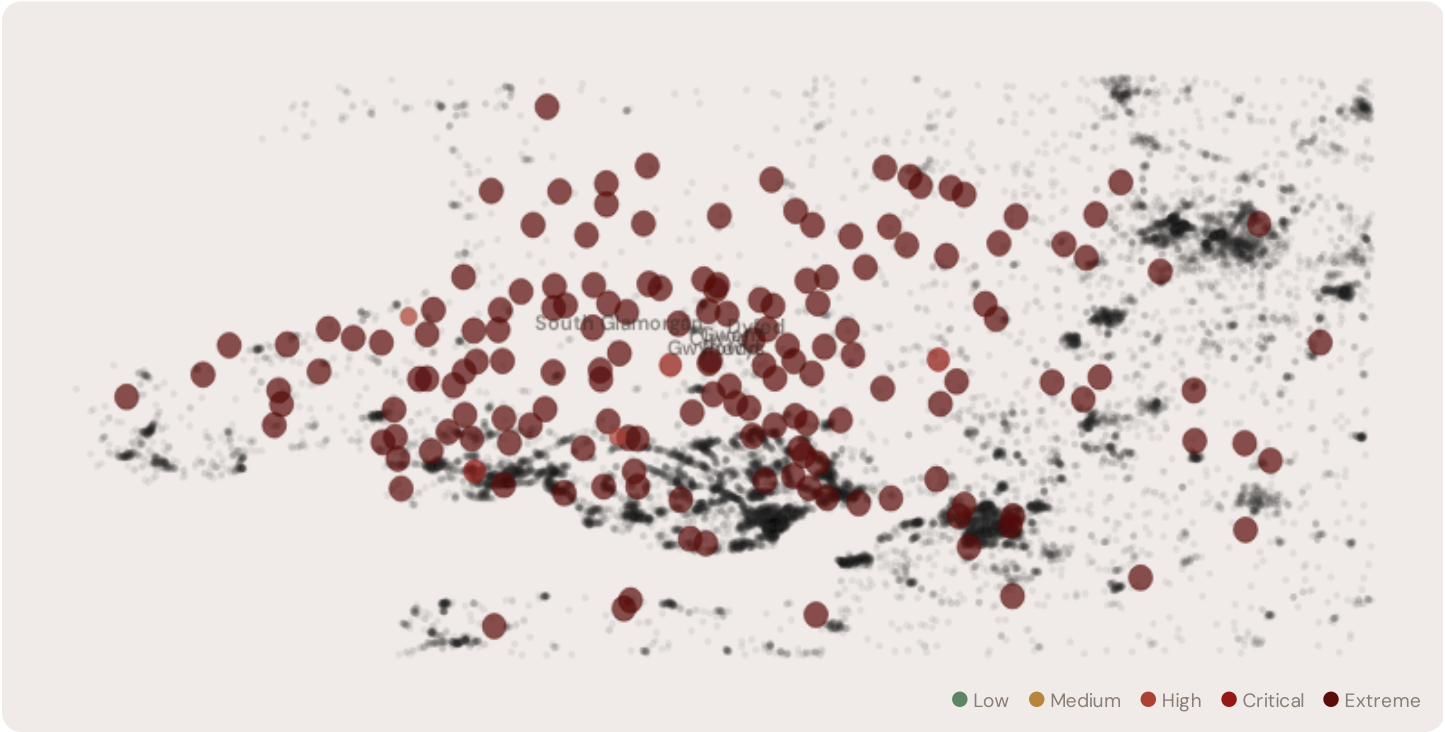

SUBSTATION	PROVINCE	R_FINAL	BAND	C	V	I	E	S	T	RE v4.2	ALERT
Substation Powys 2705	Powys	0.985	Extreme	1.000	1.000	0.891	1.000	1.000	1.000	C,I	
Grid Supply Point Powys 2771	Powys	0.976	Extreme	1.000	0.759	1.000	1.000	0.907	0.603	C,I	
BSP Gwent 2722	Gwent	0.975	Extreme	1.000	1.000	0.931	1.000	0.923	1.000	C,I	
Primary Gwent 2728	Gwent	0.953	Extreme	1.000	0.713	1.000	0.659	0.939	0.727	C,I	

SUBSTATION	PROVINCE	R_FINAL	BAND	C	V	I	E	S	T	RE v4.2	ALERT
GSP Gwynedd 2749	Gwynedd	0.953	Extreme	1.000	1.000	1.000	0.796	0.752	0.512	C,I	
Primary South Glamorgan 2643	South Glamorgan	0.949	Extreme	0.870	1.000	0.641	0.713	0.791	0.619	C,I	
GSP Powys 2609	Powys	0.946	Extreme	0.815	0.725	1.000	0.769	0.851	0.752	C,I	
BSP Clwyd 2732	Clwyd	0.934	Extreme	1.000	0.888	1.000	0.803	1.000	1.000	C,I	
Primary Gwent 2758	Gwent	0.933	Extreme	0.870	0.872	1.000	0.780	0.809	0.673	C,I	
Substation Powys 2675	Powys	0.927	Extreme	0.435	0.629	0.746	0.709	0.592	0.989	C,I	
... 156 additional substations — explore full corridor in Digital Twin →											

D.3 Component Analysis

COMPONENT AVERAGES — WALES VS FLEET

C — Continuity	0.614 vs 0.355 (+73%)
I — Infrastructure	0.635 vs 0.356 (+78%)
S — Saturation	0.605 vs 0.354 (+71%)
V — Voltage	0.601 vs 0.354 (+70%)
E — Economic	0.609 vs 0.354 (+72%)
T — Transition	0.606 vs 0.355 (+71%)

MODIFIER AVERAGES — WALES VS FLEET


R3 Consequence	1.019	fleet 0.954 ↑
R4 Graph Crit.	0.925	fleet 0.977 ↓
R6a Restoration	1.000	fleet 1.019 →
R6b Seismic	1.008	fleet 1.004 →
R7 Digital Read.	0.996	fleet 1.019 →

The dominant risk driver across the Wales corridor is **T (Transition)**, averaging 0.606 against a fleet average of 0.355 — occupying 1211% of its weight ceiling (w = 0.05). The second contributor is **E (Economic)** at 0.609 vs fleet 0.354 (609% of ceiling). Among modifiers, the R3 consequence multiplier averages 1.019 (fleet: 0.954), reflecting the socio-economic exposure of the corridor. The R6b seismic modifier averages 1.008, capturing the local seismic exposure — a dimension invisible to every competing framework.

D.4 Province Breakdown

REGION RISK PROFILE — SORTED BY MEAN R

Longer bar = lower R = better resilience.

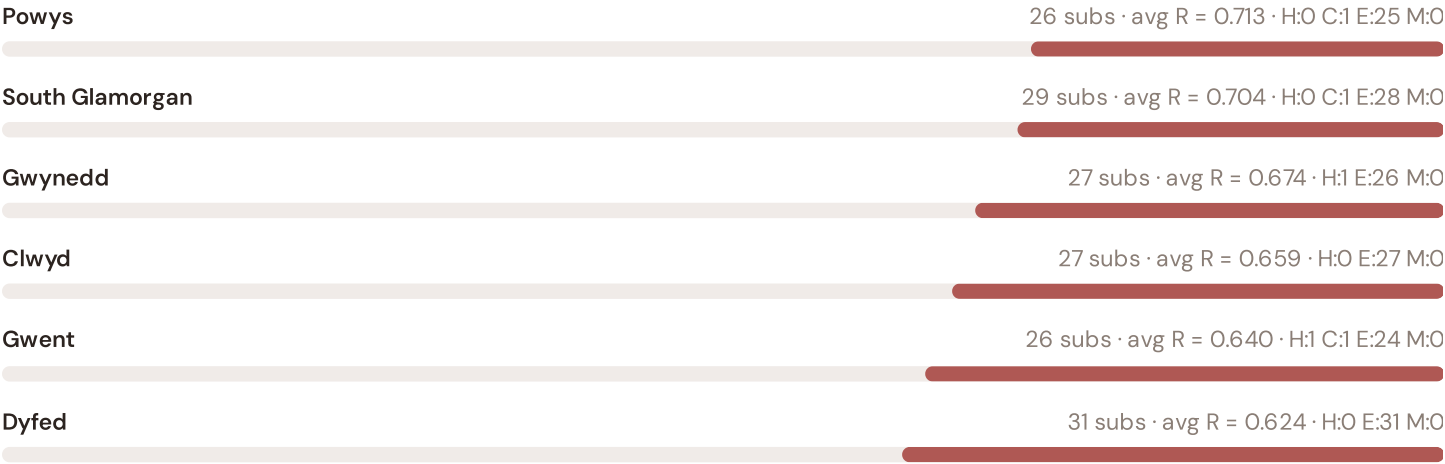

The region regions–level breakdown reveals significant intra–regional variation. **Powys** leads with a mean R of 0.713 across 26 substations, while **Dyfed** scores 0.624 — a spread of 0.089 within a single corridor. The SSI's substation–level granularity reveals that the Wales is not uniformly stressed but contains distinct sub–corridors of concentrated risk — precisely the kind of spatial pattern that investment planning requires.

D.5 Implications

94 Wales substations score $R \geq 0.650$, placing them in the upper quartile of national risk. For NEPN / national digital plan / RRP investment prioritisation, this analysis identifies the Powys sub–corridor as the highest–priority target — where DER deployment is accelerating against ageing infrastructure with above–average continuity deficits and significant socio–economic exposure. The SSI's silo–breaking approach reveals what no single–discipline framework can: that these substations matter not only because of their engineering condition, but because the communities they serve are disproportionately vulnerable to disruption. This is precisely the anticipatory grid planning capability that the SSI was built to provide.


SECTION E — RECURRING MODULE

OECD Context Card

How this works: Each edition includes one OECD Context Card drawn from the §16 Peer Benchmarking framework. The card is selected to complement the month's deep–dive theme. This month: **SAIDI comparison** — because the Southern Coastal corridor analysis hinges on United Kingdom's continuity performance relative to OECD peers. Future editions rotate through: VoLL comparison (Ed. 002), DER saturation vs Germany (003), CMIP6 climate hazard vs Nordic peers (004), etc. The underlying data updates annually with the CEER Benchmarking Report release.

Unplanned SAIDI (min/customer/year) — Selected OECD Countries

Longer bar = lower SAIDI = better reliability. Values in min/customer/year.

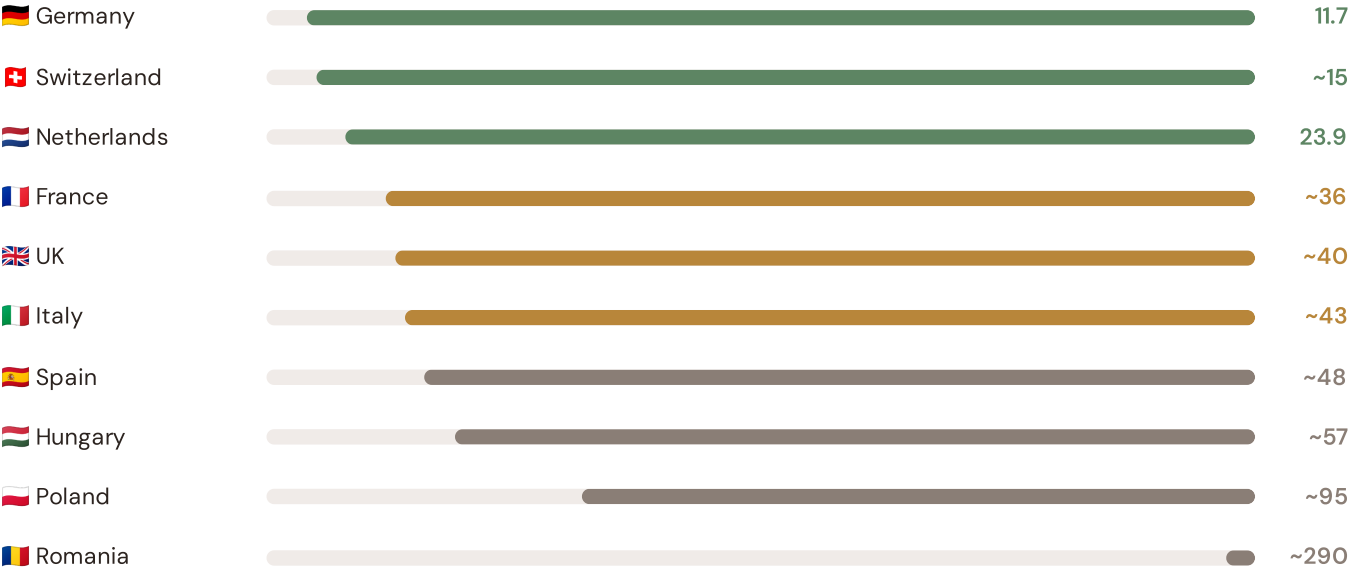


Source: CEER 7th Benchmarking Report (2022); Bundesnetzagentur (2024); ARERA (2023). · See §16 Peer Benchmarking for full methodology and caveats. · Updated annually with CEER BR release. · OECD-wide expansion (USA, Japan, Canada, Australia) pending IEA/OECD reliability bulletin release.


This month's key insight: The Wales corridor deep-dive shows **159 substations** (of 166) with C-component above 70% of its weight ceiling — indicating continuity-of-supply performance consistent with rural territory classification. The corridor's average C of 0.614 is **1.7× the fleet average** of 0.355. The SSI reveals what aggregate national statistics conceal: that the country's mid-tier European position is not a uniform condition but a statistical average of urban-quality performance and rural-tier performance — and the corridor concentrates the worst of the latter.

Nations Risk Ranking — All 12 British Nations

Where does this corridor sit within the national landscape? Regions sorted by mean R_{median}, with band distribution and fleet comparison.

Longer bar = lower R = better resilience. Sorted worst → best.

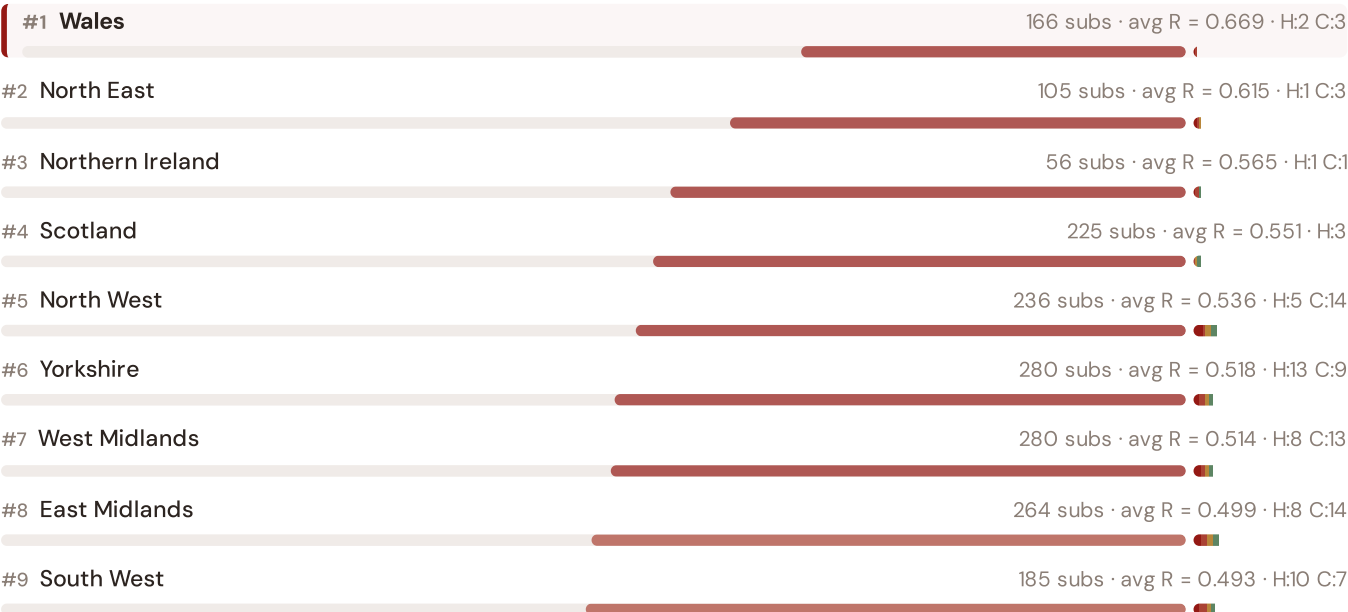

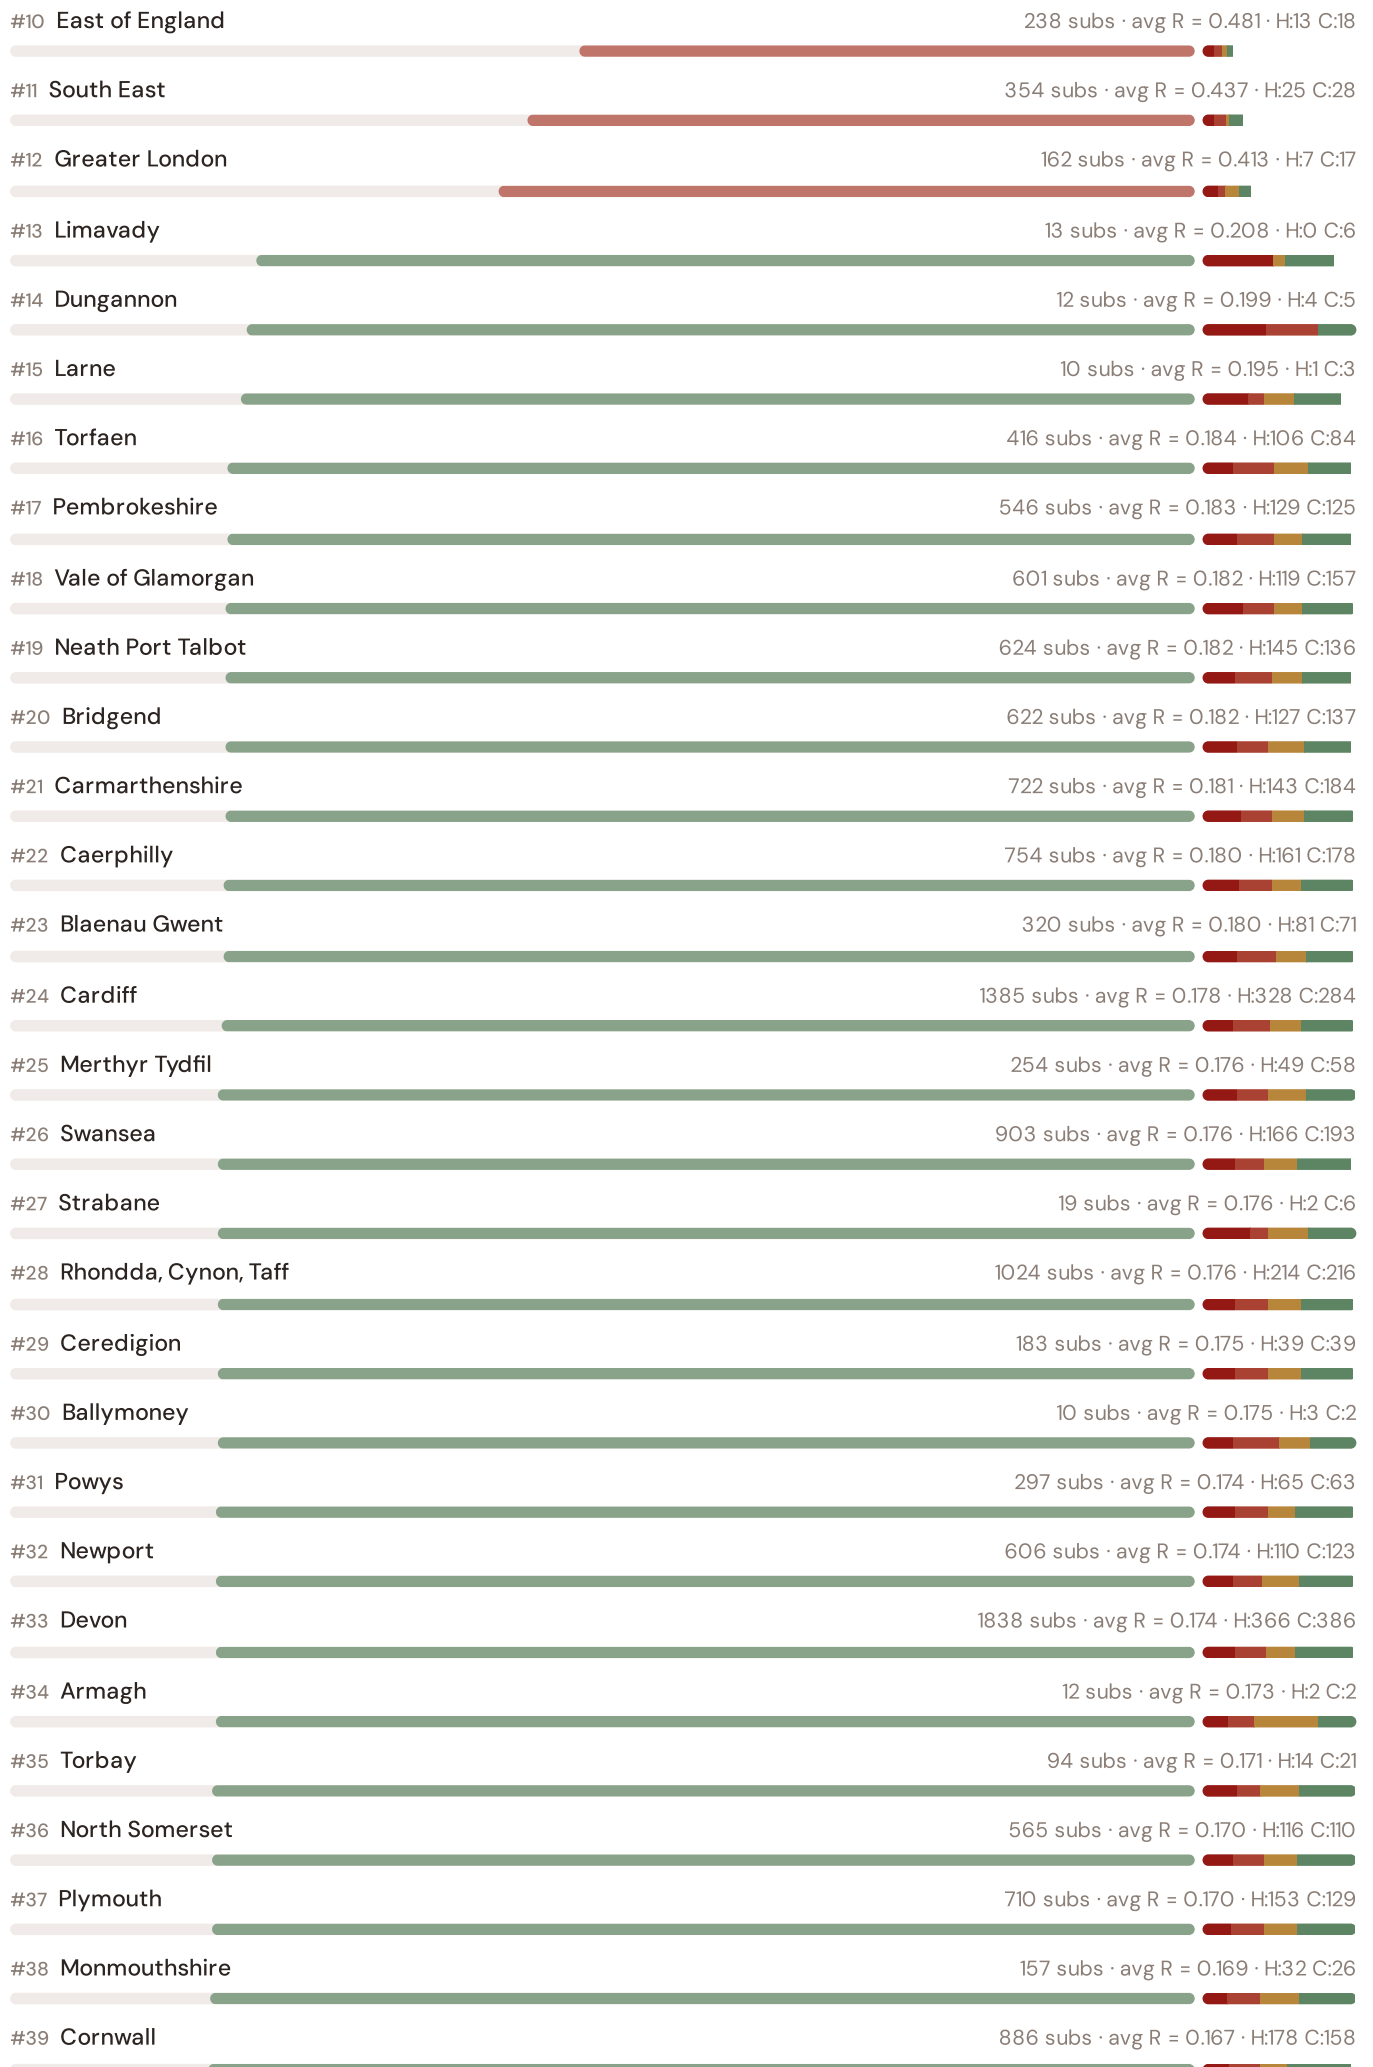



#70 Tower Hamlets	391 subs · avg R = 0.145 · H:53 C:51
#71 Cheshire East	237 subs · avg R = 0.144 · H:29 C:36
#72 Merton	164 subs · avg R = 0.144 · H:32 C:12
#73 Hammersmith and Fulham	116 subs · avg R = 0.143 · H:10 C:21
#74 Gloucestershire	1019 subs · avg R = 0.143 · H:141 C:142
#75 Angus	133 subs · avg R = 0.143 · H:16 C:25
#76 Southwark	179 subs · avg R = 0.142 · H:24 C:21
#77 Darlington	33 subs · avg R = 0.142 · H:2 C:5
#78 Bromley	161 subs · avg R = 0.141 · H:21 C:18
#79 Staffordshire	428 subs · avg R = 0.140 · H:51 C:50
#80 Bristol	956 subs · avg R = 0.140 · H:129 C:110
#81 Lancashire	798 subs · avg R = 0.139 · H:89 C:102
#82 Tameside	99 subs · avg R = 0.139 · H:11 C:14
#83 Coleraine	21 subs · avg R = 0.138 · H:4 C:3
#84 Birmingham	1114 subs · avg R = 0.138 · H:149 C:142
#85 Ards	14 subs · avg R = 0.138 · H:0 C:3
#86 Poole	83 subs · avg R = 0.138 · H:13 C:11
#87 Newham	350 subs · avg R = 0.138 · H:39 C:47
#88 Trafford	135 subs · avg R = 0.138 · H:23 C:12
#89 Craigavon	28 subs · avg R = 0.137 · H:1 C:6
#90 Doncaster	85 subs · avg R = 0.137 · H:6 C:13
#91 Newry and Mourne	36 subs · avg R = 0.137 · H:2 C:5
#92 South Tyneside	37 subs · avg R = 0.137 · H:4 C:3
#93 Bradford	131 subs · avg R = 0.137 · H:18 C:14
#94 Sefton	43 subs · avg R = 0.137 · H:5 C:5
#95 Solihull	172 subs · avg R = 0.136 · H:13 C:29
#96 Fermanagh	30 subs · avg R = 0.136 · H:2 C:3
#97 North Tyneside	82 subs · avg R = 0.135 · H:10 C:11
#98 West Lothian	243 subs · avg R = 0.135 · H:36 C:19
#99 Lambeth	106 subs · avg R = 0.134 · H:10 C:11

#100	Bracknell Forest	18 subs · avg R = 0.133 · H:0 C:3
#101	East Sussex	451 subs · avg R = 0.133 · H:57 C:48
#102	Banbridge	8 subs · avg R = 0.133 · H:2
#103	Kensington and Chelsea	30 subs · avg R = 0.133 · H:5 C:3
#104	Middlesbrough	79 subs · avg R = 0.133 · H:6 C:10
#105	Southend-on-Sea	24 subs · avg R = 0.132 · H:3 C:2
#106	Dudley	218 subs · avg R = 0.132 · H:19 C:26
#107	East Riding of Yorkshire	209 subs · avg R = 0.131 · H:15 C:27
#108	Herefordshire	155 subs · avg R = 0.131 · H:14 C:22
#109	Redbridge	58 subs · avg R = 0.131 · H:4 C:6
#110	Derbyshire	586 subs · avg R = 0.131 · H:63 C:59
#111	Ballymena	23 subs · avg R = 0.130 · H:3 C:1
#112	Cheshire West and Chester	240 subs · avg R = 0.130 · H:15 C:28
#113	Kent	791 subs · avg R = 0.130 · H:101 C:70
#114	Newtownabbey	31 subs · avg R = 0.130 · H:2 C:3
#115	Brent	57 subs · avg R = 0.129 · H:7 C:6
#116	West Dunbartonshire	47 subs · avg R = 0.129 · H:6 C:5
#117	Norfolk	894 subs · avg R = 0.129 · H:85 C:102
#118	Leicestershire	203 subs · avg R = 0.129 · H:20 C:21
#119	Lincolnshire	313 subs · avg R = 0.129 · H:32 C:34
#120	North Lincolnshire	193 subs · avg R = 0.129 · H:21 C:22
#121	Kingston upon Hull	47 subs · avg R = 0.128 · H:3 C:6
#122	Surrey	793 subs · avg R = 0.127 · H:79 C:69
#123	Bexley	72 subs · avg R = 0.126 · H:6 C:8
#124	Gateshead	89 subs · avg R = 0.125 · H:11 C:7
#125	Stockport	103 subs · avg R = 0.125 · H:7 C:10
#126	Rotherham	102 subs · avg R = 0.125 · H:7 C:11
#127	Hampshire	1049 subs · avg R = 0.125 · H:103 C:87
#128	Castlereagh	23 subs · avg R = 0.125 · H:1 C:4
#129	Shropshire	159 subs · avg R = 0.124 · H:17 C:9

#130	Nottinghamshire	559 subs · avg R = 0.124 · H:53 C:48
#131	Redcar and Cleveland	63 subs · avg R = 0.124 · H:5 C:6
#132	Coventry	96 subs · avg R = 0.123 · H:8 C:7
#133	Peterborough	35 subs · avg R = 0.122 · H:3 C:2
#134	Northamptonshire	394 subs · avg R = 0.121 · H:31 C:36
#135	Dorset	309 subs · avg R = 0.121 · H:27 C:29
#136	Portsmouth	53 subs · avg R = 0.121 · H:3 C:6
#137	Newcastle upon Tyne	103 subs · avg R = 0.121 · H:9 C:10
#138	Barking and Dagenham	70 subs · avg R = 0.121 · H:7 C:7
#139	Kingston upon Thames	93 subs · avg R = 0.121 · H:8 C:7
#140	North Down	13 subs · avg R = 0.121 · H:0 C:2
#141	Blackburn with Darwen	33 subs · avg R = 0.120 · H:1 C:3
#142	Milton Keynes	104 subs · avg R = 0.120 · H:9 C:5
#143	North Yorkshire	281 subs · avg R = 0.120 · H:19 C:24
#144	Waltham Forest	97 subs · avg R = 0.120 · H:9 C:9
#145	Antrim	23 subs · avg R = 0.120 · H:2 C:3
#146	Croydon	477 subs · avg R = 0.120 · H:36 C:40
#147	Midlothian	82 subs · avg R = 0.119 · H:8 C:5
#148	West Berkshire	49 subs · avg R = 0.119 · H:4 C:5
#149	Glasgow	375 subs · avg R = 0.118 · H:23 C:29
#150	Dumfries and Galloway	69 subs · avg R = 0.118 · H:6 C:6
#151	Luton	24 subs · avg R = 0.118 · H:1 C:2
#152	Wiltshire	335 subs · avg R = 0.117 · H:22 C:28
#153	Highland	689 subs · avg R = 0.117 · H:52 C:46
#154	Lisburn	33 subs · avg R = 0.116 · H:4 C:1
#155	Bedford	62 subs · avg R = 0.116 · H:6 C:4
#156	Medway	147 subs · avg R = 0.116 · H:8 C:10
#157	Harrow	24 subs · avg R = 0.115 · H:1 C:2
#158	Nottingham	317 subs · avg R = 0.115 · H:27 C:16
#159	Wolverhampton	61 subs · avg R = 0.115 · H:3 C:5

#160	Flintshire	92 subs · avg R = 0.115 · H:6 C:4
#161	Cumbria	302 subs · avg R = 0.115 · H:21 C:23
#162	Sheffield	405 subs · avg R = 0.115 · H:21 C:28
#163	Northumberland	95 subs · avg R = 0.114 · H:8 C:4
#164	East Ayrshire	54 subs · avg R = 0.113 · H:5 C:3
#165	Bury	36 subs · avg R = 0.113 · H:3 C:3
#166	South Ayrshire	33 subs · avg R = 0.113 · H:1 C:1
#167	Manchester	223 subs · avg R = 0.113 · H:18 C:10
#168	Sandwell	567 subs · avg R = 0.113 · H:33 C:33
#169	Fife	310 subs · avg R = 0.113 · H:20 C:22
#170	Dundee	71 subs · avg R = 0.113 · H:3 C:6
#171	Eilean Siar	29 subs · avg R = 0.113 · H:2 C:2
#172	Southampton	89 subs · avg R = 0.112 · H:5 C:4
#173	Richmond upon Thames	48 subs · avg R = 0.112 · H:5 C:2
#174	Walsall	60 subs · avg R = 0.112 · H:4 C:3
#175	Stoke-on-Trent	200 subs · avg R = 0.112 · H:11 C:12
#176	Falkirk	147 subs · avg R = 0.112 · H:10 C:9
#177	Havering	73 subs · avg R = 0.112 · H:5 C:4
#178	Hertfordshire	489 subs · avg R = 0.111 · H:40 C:23
#179	Leeds	411 subs · avg R = 0.111 · H:22 C:24
#180	Down	24 subs · avg R = 0.111 · H:1 C:2
#181	Knowsley	58 subs · avg R = 0.110 · H:7 C:2
#182	Buckinghamshire	239 subs · avg R = 0.109 · H:9 C:12
#183	Stockton-on-Tees	160 subs · avg R = 0.109 · H:9 C:10
#184	Moray	89 subs · avg R = 0.109 · H:6 C:4
#185	Perthshire and Kinross	137 subs · avg R = 0.109 · H:11 C:7
#186	Carrickfergus	19 subs · avg R = 0.108 · H:2 C:1
#187	Hounslow	47 subs · avg R = 0.108 · H:4 C:2
#188	Essex	749 subs · avg R = 0.108 · H:44 C:38
#189	Haringey	103 subs · avg R = 0.108 · H:3 C:5

#190	Argyll and Bute	92 subs · avg R = 0.107 · H:5 C:5
#191	Royal Borough of Windsor and Maidenhead	55 subs · avg R = 0.107 · H:4 C:2
#192	Rochdale	42 subs · avg R = 0.107 · H:1
#193	Reading	58 subs · avg R = 0.106 · H:5 C:1
#194	Suffolk	415 subs · avg R = 0.106 · H:21 C:20
#195	Oxfordshire	483 subs · avg R = 0.106 · H:23 C:19
#196	Inverclyde	24 subs · avg R = 0.106 · H:2 C:1
#197	Renfrewshire	89 subs · avg R = 0.106 · H:5 C:2
#198	Stirling	68 subs · avg R = 0.105 · H:2 C:4
#199	Kirklees	210 subs · avg R = 0.105 · H:14 C:5
#200	Liverpool	90 subs · avg R = 0.105 · H:5 C:3
#201	East Lothian	103 subs · avg R = 0.104 · H:8 C:2
#202	Oldham	287 subs · avg R = 0.104 · H:17 C:10
#203	Sutton	222 subs · avg R = 0.104 · H:11 C:11
#204	Wakefield	245 subs · avg R = 0.103 · H:12 C:7
#205	Wrexham	92 subs · avg R = 0.101 · H:4 C:5
#206	Salford	173 subs · avg R = 0.101 · H:10 C:6
#207	Worcestershire	834 subs · avg R = 0.101 · H:30 C:29
#208	Isle of Wight	521 subs · avg R = 0.101 · H:17 C:20
#209	Leicester	98 subs · avg R = 0.101 · H:2 C:2
#210	Central Bedfordshire	79 subs · avg R = 0.101 · H:3 C:2
#211	Wokingham	138 subs · avg R = 0.101 · H:4 C:6
#212	West Sussex	814 subs · avg R = 0.101 · H:33 C:29
#213	Barnsley	211 subs · avg R = 0.101 · H:9 C:3
#214	Anglesey	147 subs · avg R = 0.100 · H:4 C:6
#215	Ealing	51 subs · avg R = 0.099 · H:3 C:1
#216	Scottish Borders	128 subs · avg R = 0.099 · H:1 C:7
#217	Barnet	107 subs · avg R = 0.098 · H:3 C:3
#218	Aberdeen	659 subs · avg R = 0.098 · H:18 C:17
#219	Thurrock	144 subs · avg R = 0.098 · H:4 C:3



The Wales ranks **#1 of 244 region regions** by mean R_{median}, placing it among the upper tier of national risk. The three most stressed are Wales, North East, Northern Ireland, while the three most resilient are Moyle, Shetland Islands, Bolton. 50 of 244 score above the fleet average of 0.153. This ranking — possible only because the SSI scores every substation individually rather than relying on aggregate DSO or national statistics — reveals the true spatial distribution of grid stress. It is precisely this substation-level granularity that positions the SSI as a tool for

investment prioritisation: not treating entire regions as monoliths, but identifying the specific corridors within each that demand attention.


SECTION F — RECURRING MODULE

SSI Enhanced Neural Network — Monthly Topic

From grid intelligence to BESS valuation platform. The SSI Index answers *"How healthy is this substation?"* The SSI Enhanced Neural Network (SSI-ENN) extends this into: *"What is a BESS worth at this substation — to the DNO and to the community?"* Each edition of this report explores one building block of the SSI-ENN's five-layer architecture, showing how the SSI Index data feeds directly into investment-grade grid analytics.

SSI-ENN value-articulation radar — 5-lens stakeholder taxonomy

The SSI-ENN's commercial-tier value articulation answers "what is a BESS worth at this substation — and to whom?" through five stakeholder lenses (architecture memo §5 Decision #12): **V_{Community}** (welfare avoided outages, energy-poverty relief, employment) · **V_{Grid}** (V_DSO — avoided reinforcement, reliability, voltage, congestion, frequency, black-start, hosting capacity) · **V_{Owner}** (NPV / IRR / payback per asset class) · **V_{Investor}** (risk-adjusted equity return at the financing tier) · **V_{LP}** (limited-partner cash-on-cash + DPI / TVPI portfolio metrics). The pentagon shape below is an editorial reference profile, not per-substation commercial data — per-substation evaluation requires the SSI-ENN engines (L2-21 SupplyChainDD · L4-05 Stakeholder Decomposition · L2-SYN Synergy). Foundation contact: ssi_index@ikenga.eu.

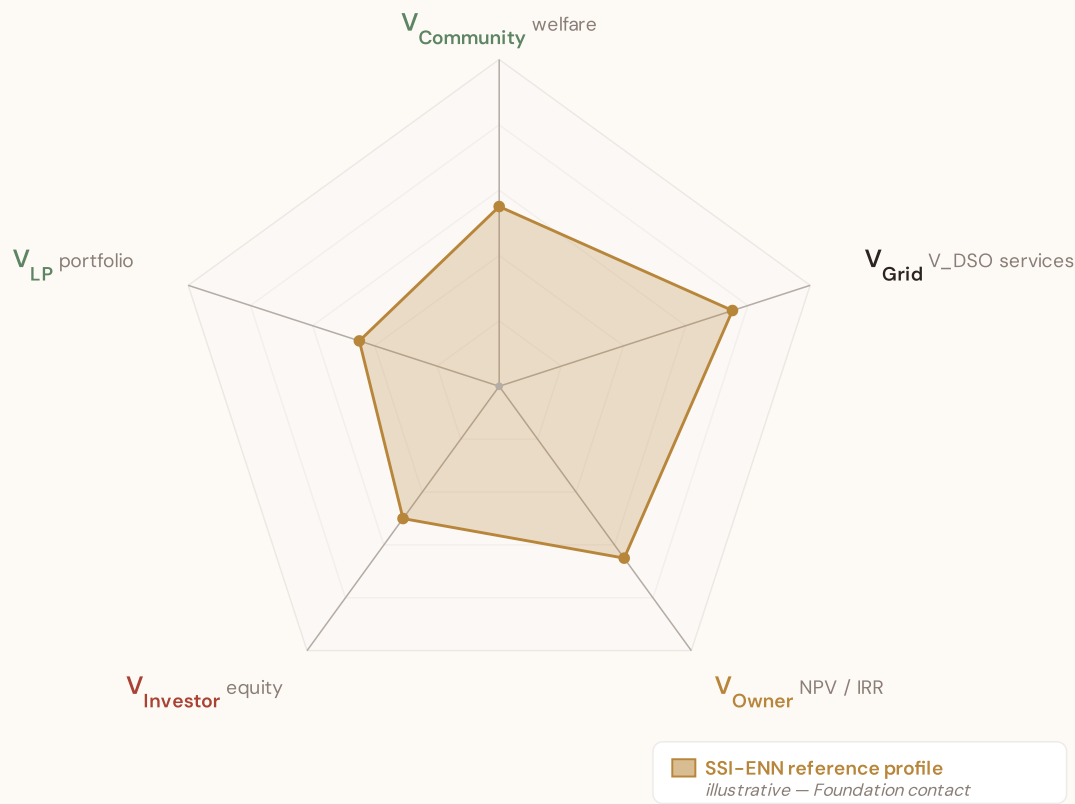

Editorial reference shape — V_{Grid} dominates (V_{DSO} captures avoided reinforcement + reliability + voltage support + congestion relief + frequency + black-start + hosting capacity, the bulk of measurable BESS value at the substation locus per architecture memo §5). $V_{Community} + V_{Owner}$ are co-secondary. $V_{Investor} + V_{LP}$ reflect the financing-tier waterfall above V_{Owner} NPV. Per-substation commercial decomposition lives in the SSI-ENN — mail to ssi_index@ikenga.eu for analytics.

Layer 1 — Data

SSI v4.0 component taxonomy, normalisation, MC engine

Layer 2 — Valuation

DSO/TSO + Community value stacks, TCO, real options

Layer 3 — Neural Net

GBT+DNN ensemble, transfer learning, SHAP

Layer 4 — Coverage

Country prioritisation, DCI, registry, calibration

Layer 5 — Platform

Products, API, revenue model, unit economics

LAYER 2

§0.4.3 · August 2026

Total Cost of Ownership Model

Stochastic cost modelling — because BESS economics are not deterministic

CAPEX follows a learning-curve distribution calibrated to Bloomberg NEF projections. OPEX is modelled as a mean-reverting process with seasonal components reflecting temperature-dependent degradation. Battery degradation follows a non-linear capacity fade model: each cycle reduces usable capacity, with rate depending on depth-of-discharge, temperature, and C-rate.

The SSI data feeds this: substations with high II (temperature trajectory) face faster degradation. The Monte Carlo engine propagates cost uncertainty alongside revenue uncertainty.

KEY CONCEPTS

→ CAPEX learning curve calibrated to BNEF

→ Non-linear battery degradation: f(DoD, temperature, C-rate)

→ SSI II (climate trajectory) drives degradation forecast

→ Full NPV distribution, not point estimate

LIVE SSI DATA CONNECTION

Across the 59,744-substation fleet, the average consequence multiplier (R3) is 0.954, indicating significant socio-economic exposure. 17049 substations (28.5%) are classified High or Critical — these are the highest-priority candidates for BESS deployment.

Coming next month:

LAYER 1

Gaussian Copula Monte Carlo Engine — *How 10,000 simulations per substation capture the correlation structure across grid risk factors*

SECTION F.5 — V4.2 ANTI-MALADAPTATION GOVERNANCE GATE

Radar 2 — W1–W10 Substation Community Value

Wall 1 — Public W1–W10 framework.

The 10-axis Radar 2 expresses per-substation community-value baseline pre-intervention: *W1 Reliability · W2 Carbon · W3 Local Economic · W4 Climate Resilience · W5 Digital Inclusion · W6 Sovereignty · W7 Local Value Retention · W8 Communications · W9 Supply Security · W10 Compute Multiplier*. The discipline floor that the anti-maladaptation governance gate protects: *"no W axis worse off after intervention."*

5/1/1/3 4-tier audit-state classification (mesh resolution per Convention #6 §5.6)

Published (5) — solid fill

W1 · W2 · W3 · W4 · W8

Peer-reviewed methodology operational at fleet scale.

Published-baseline (1) ▲ — solid fill +

chevron corner marker

W9 — Supply Security

Peer-reviewed academic basis

(Albert/Holme topology-only baseline) with acknowledged scope limit (Buldyrev/IEEE

493 — N-1 contingency dynamics not captured at baseline).

Baseline-only (1) — striped fill

W5 — Digital Inclusion

Foundation methodology under development; baseline value defensible at v4.2.

Commercial (3) — dashed-faded

W6 · W7 · W10

Commercial deliverables — please contact the Foundation.


Per Convention #6 §5.6.7 academic-defensibility: the 4-tier classification aligns with IPCC AR6 + JRC COIN + Reckien (2021) continuum literature. The Published-baseline tier (W9) is the principled mesh resolution that honors both peer-review status + acknowledged scope limit without forcing a false binary.

v4.2 methodology disclosure — per-country normalisation

Across the United Kingdom, the substation fleet's component scores (C / V / I / E / S / T) and the Re composite have been normalised to [0, 1] via the canonical **P5/P95 percentile** method, using *per-country empirical bounds*. This is the same procedure Italy's v4.0.2 deployment applied at the scoring stage (SSI_v4_0 Italy/.../scoring-it/normalise.py); for v4.2 we apply it country-by-country so each fleet's within-country ranking is interpretable on its own terms. Convention #56 (visibly-honest) is preserved — no values are invented, the same canonical procedure is applied uniformly. Italy's pilot fleet keeps its native spread (0.17 – 0.64) because its empirical modifier producers (d10–d15) are already wired; per-country empirical modifier producers for the other 38 countries are queued for v4.5 and will refine the absolute risk ranking. Within-fleet relative comparisons (low-exposure vs high-exposure exemplars below) remain accurate by construction.

Radar 2 visualization — anti-maladaptation governance gate

Two worked examples overlaid: **Substation Surrey 0230** (low-exposure reference, Re_norm 0.000) and **Primary Tayside 3008** (high-exposure reference, Re_norm 1.000). Axis labels are colour-coded per the 5/1/1/3 mesh resolution; the ▲ chevron marks W9 as Published-baseline. Hover any axis label for the methodology tooltip.

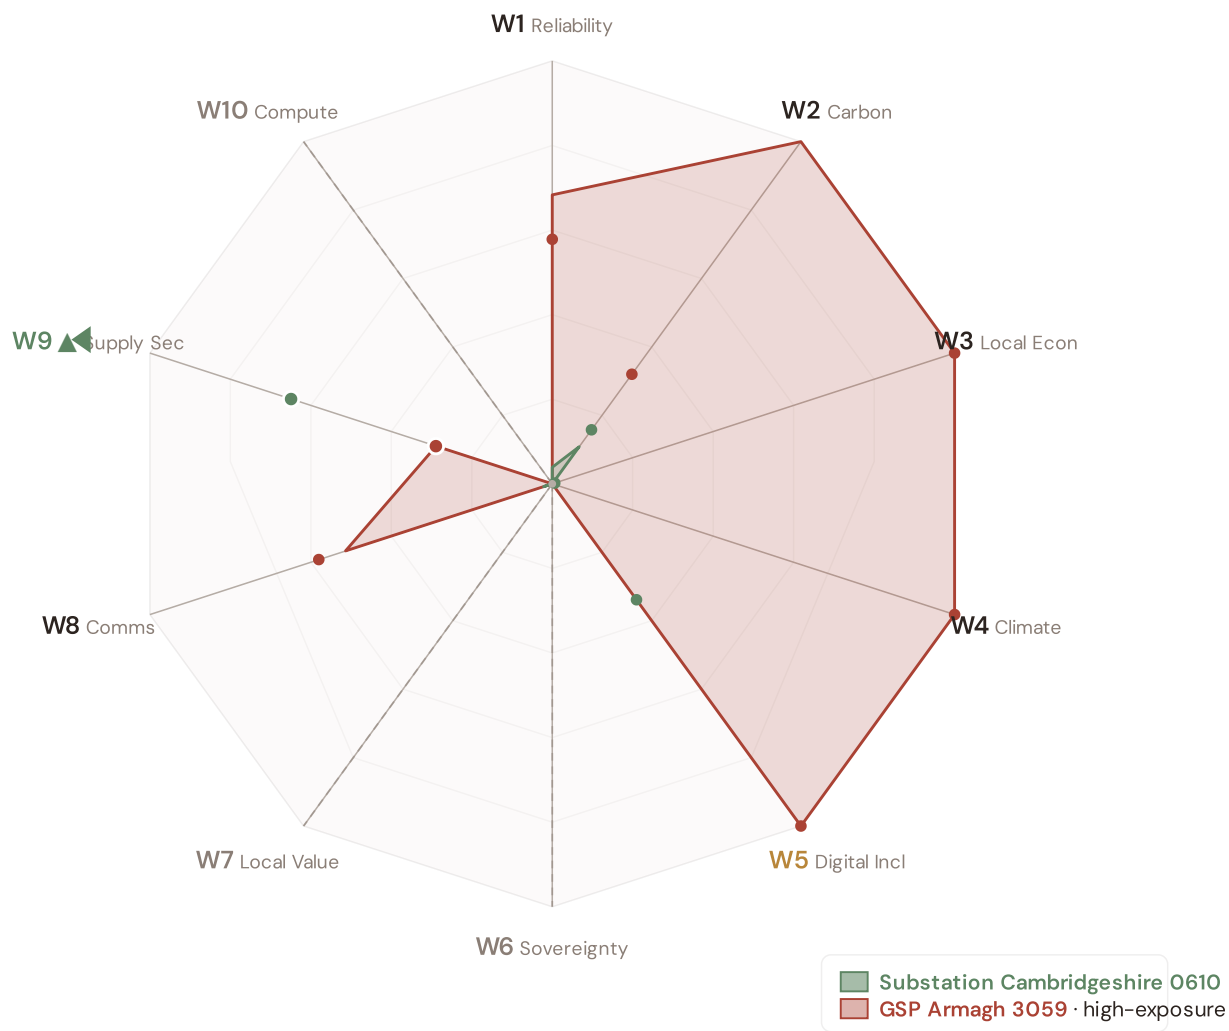

Substation Cambridgeshire 0610 polygon (sage): the low-exposure reference for this country — compact footprint reflects the fleet floor on the W-axis baselines. GSP Armagh 3059 polygon (terracotta): the high-exposure reference — larger footprint where this country's fleet's W-axis values reach the upper percentile. Commercial-tier axes (W6 data sovereignty, W7 local value retention, W10 compute multiplier) display at zero per Convention #6 §5.6 mesh design — no public-data computation. W2 carbon uses EU-average MEF fallback (0.36) per v4.2 calibration.

W1–W10 axis enumeration with audit–state classification

5/1/1/3 4-TIER · V4.2 MESH RESOLUTION · LIVE VALUES VIA
COMPUTE_W_BASELINES.PY

AXIS	NAME	AUDIT STATE	METHODOLOGY BASIS
W1	Reliability	Published	$C \times E2_{\text{local}} \times \text{population} (SAIDI + + -POV)$
W2	Carbon	Published	$T1 \times \text{zonal MEF} \times (V \cdot \text{deg} / 100) (+ EEA)$
W3	Local Economic	Published	$\text{norm}(R10_{\text{just}}) - \text{EU-SILC} + \text{OIPE energy-poverty}$
W4	Climate Resilience	Published	$(R6d - 1) + (R6e - 1) + (R6c - 1) + \frac{1}{2}(R9 - 1) - v4.2$ resilience modifier family
W5	Digital Inclusion	Baseline-only	$\text{norm}(R8_{\text{adapt}}) - \text{bulk SM} + + \text{DESI}$
W6	Sovereignty	Commercial	Foundation contact (ssi_index@ikenga.eu)
W7	Local Value Retention	Commercial	Foundation contact (ssi_index@ikenga.eu)
W8	Communications	Published	$C \times p_{\text{crit_10yr}} \times \text{population} (\text{Markov 10-yr critical probability})$
W9 ▲	Supply Security	Published–baseline ▲	$0.60 \times BC_{\text{pct}} + 0.30 \times \text{bridge} + 0.10 \times (1 - \text{deg} / 20) -$ OSM power-graph betweenness centrality + bridge identification + degree-based redundancy
W10	Compute Multiplier	Commercial	Foundation contact (ssi_index@ikenga.eu)

▲ W9 Published–baseline — mandatory transparency tooltip

W9 — Supply Security (Published–baseline). Public-tier methodology: betweenness centrality + bridge identification + degree-based redundancy, computed deterministically from OpenStreetMap power-graph data. Peer-reviewed academic basis: Albert et al. (2000) *Nature*; Holme et al. (2002); broad power-grid centrality literature. Acknowledged scope limit (per Buldyrev et al. (2010) *Nature* + IEEE 493): topology-only baseline does not capture N-1 contingency dynamics or interdependent-network cascades. Richer methodology — N-1 contingency simulation + flexibility-services valuation — lives in SSI-ENN L2-22 / L2-23 commercial deliverables. Mail to ssi_index@ikenga.eu for extended analysis.

Worked examples. The W1–W10 per-substation baseline values for two anchor cases — Substation Cambridgeshire 0610 (low-exposure reference) and GSP Armagh 3059 (high-exposure reference) — are computed live by `_audit - snapshot/scripts/d3_radar2_per_country.py` against the country's `ssi-data.json`. Per Convention #6 §2.3.6 Path B refactor (11 Jun 2026), this country's exemplars are now algorithmically selected (min/max `Re_norm`) rather than named picks. See the FC v2 reference for W-axis methodology + commercial-tier rationale.

Anti-maladaptation discipline. The 10-axis Radar 2 baseline is the per-substation floor that any post-intervention scenario must protect. No W axis may degrade after a BESS deployment, line upgrade, or operational change. The discipline is enforced per axis (not in aggregate), and per substation (not in fleet average). This is the v4.2 governance gate that ensures grid-modernisation projects deliver net community value without hidden trade-offs.

SECTION G

Looking Ahead

NEXT MONTH — EDITION 04

Alpine Valleys

Deep-dive into Region 05's grid risk profile — substation map, component analysis, region regions breakdown. European Context Card: Narrow valleys, long restoration MTTR.

NEXT DATA REFRESH

Q4 2026 — 0 Quarterly Sources

none are due for refresh in Q4. Impact: DER registry (T1), business fabric indicators (E2), macro-economic data. Highest-impact annual source pending: **Ofgem (Office of Gas and Electricity Markets)** (8 variables → C1–C4 (SAIDI/SAIFI/CAIDI), quality regulation).

FLEET SPOTLIGHT

145 Bridge Substations — Single Points of Failure

145 substations are topological bridges — their failure disconnects part of the network. Of these, **137** are classified High or Critical. These are the fleet's single points of failure: high graph centrality (R4) combined with elevated risk makes them priority candidates for both grid reinforcement and BESS deployment.

Edition 04 will be published on the second Thursday of September 2026. Deep-dive region: **Region 05**. To ensure you receive it, confirm your subscription segment (General / Institutional / Academic) by email to ssi_index@ikenga.eu.

Feedback welcome. The SSI Index is designed to evolve through stakeholder dialogue. If you represent an British utility, , municipal energy company, or academic institution and would like to contribute data or methodology feedback, please contact us at ssi_index@ikenga.eu. The SSI's credibility depends on open scrutiny.

SSI Monthly Intelligence Report — Edition 006

Published 13 August 2026 · SSI Index **v4.2** (refreshed June 2026) · 62,409 substations · 939 grid lines · 6 components + **Re composite** (Radar 17th axis, bounds [0.920, 1.787]) · 20 metrics · 11 modifiers (5 baseline + 6 v4.2 resilience family)

10,000-iteration Gaussian Copula Monte Carlo · Sobol global sensitivity analysis (196,608 evals/substation) · CMIP6 SSP2-4.5 · W1-W10 anti-maladaptation governance gate (5/1/1/3 4-tier mesh resolution per Convention #6 §5.6)

Foundation contact

The SSI Index is a non-profit foundation project, please mail to ssi_index@ikenga.eu for more details.

© 2026 Altinium Invest · Corso Vittorio Emanuele 110/5, 80121 Napoli · P.IVA 10656441218

USCO Registration pending · SIAE Deposito Opere Inedite · Protected under L. 633/1941, Berne Convention, Copyright Act 1976

[View in browser](#)