

# Monthly Intelligence Report

Edition 001 — Denmark

Where offshore wind dominance and North Sea storm resilience challenge grid stability.  
Inaugural edition · April 2026 · SSI v4.0.2

## CONTENTS

|                                                       |                                      |
|-------------------------------------------------------|--------------------------------------|
| <b>A</b> Executive Summary                            | <b>E</b> European Context Card       |
| <b>B</b> Cyber & Economic Exposure Monitor            | <b>F</b> SSI Enhanced Neural Network |
| <b>C</b> Data Refresh & Changelog                     | <b>G</b> Looking Ahead               |
| <b>D</b> Deep-Dive: The Jutland–Zealand Grid Corridor |                                      |

## SECTION A

### Executive Summary

#### SUBSTATIONS SCORED

**2,451**  
39 HV · 2,412 MV

#### GRID LINES MAPPED

**~6,500**  
~9,000 km transmission & distribution

#### MC SIMULATIONS

**~25M**  
10,000 per substation

#### PUBLIC DATA SOURCES

**30+**  
95 variables · zero proprietary

The SSI Index is the only operational framework that fuses substation-level engineering metrics with socio-economic consequence valuation in a single composite score — scoring 71/80 (89%) across 16 competitive dimensions. Its engine processes ~52,000 source data points per run, executes ~25 million Monte Carlo simulations through a 20×20 Gaussian copula correlation matrix, and performs ~400 million arithmetic operations — producing ~232,000 output data points with full uncertainty quantification across 2,451 substations and ~6,500 grid lines spanning ~9,000 km.

Operated as a non-profit through a dedicated foundation, the SSI Index serves the public interest with zero dependency on proprietary data. All 95 variables are drawn from 30+ verified public sources (Energinet, Forsyningstilsynet, Danmarks Statistik, DMI, GEUS), making the methodology fully auditable and reproducible. Initially covering Denmark's Energinet-managed transmission and ~40 distribution network operators (DSOs), the Index is progressively being rolled out to all OECD countries — applying the same silo-breaking approach: fusing grid risk with societal exposure at asset-level resolution wherever open data permits.

## Substation in Focus

### Assens 10 kV

Assens · Syddanmark · 10 kV

0.253

Medium

0.086

4th

R\_FINAL

CLASSIFICATION

CI WIDTH

FLEET PERCENTILE

#### COMPONENTS

**C** Continuity: 0.19 / 0.30 (19%)

**I** Infrastructure: 0.32 / 0.25 (32%)

**S** Saturation: 0.28 / 0.20 (28%)

**V** Voltage: 0.18 / 0.10 (18%)

**E** Economic: 0.33 / 0.10 (33%)

**T** Transition: 0.26 / 0.05 (26%)

#### MODIFIERS

**R3 Consequence + Island Isolation:** 1.000 → neutral

**R4 Graph Criticality + Great Belt:** 1.000 → neutral

**R6a Restoration:** 0.962 ↓ dampens

**R6b North Sea Storm + Surge:** 1.025 ↑ amplifies

**R7 Digital Readiness:** 0.992 → neutral

This month's spotlight — automatically selected for May 2026 — is **Assens 10 kV** in Assens, Syddanmark. With an R\_final of 0.253 (Medium band, 4th fleet percentile), its risk profile is dominated by the T (Transition) component at 518% of its weight ceiling, followed by E (Economic) at 334%. Modifiers collectively shift R\_base by 1.9%, reflecting the substation's specific geographic, socio-economic, and network context. The component profile illustrates the SSI's core principle: risk is never mono-dimensional. Even when one component dominates, the interaction of all six — modulated by the five multipliers — determines the final score that drives investment prioritisation.

#### SECTION B — RECURRING MODULE

## Cyber & Economic Exposure Monitor

**Why this section exists:** Traditional grid risk frameworks treat cybersecurity and economic vulnerability as separate domains. The SSI's R7 (Digital Readiness) modifier and E (Economic) component allow us to cross these silos — revealing substations where low digital resilience intersects with high economic consequence. This is precisely the anticipatory intelligence that Denmark's Energy Regulatory Authority (Forsyningstilsynet) and network operator strategic planning requires.

#### CYBER HIGH EXPOSURE

0

0.0% of fleet

#### BLIND SPOTS

0

High/Critical + R7 < median

#### AVG R7 MODIFIER

1.0048


Range [0.99, 1.05]

#### HIGH-CONSEQUENCE SUBS

137

## B.1 Cyber-Physical Risk Matrix

Each substation plotted by R7 digital readiness (x-axis) vs overall R\_median (y-axis). The upper-left quadrant — high risk, low digital readiness — identifies *blind spots* where grid stress is high but monitoring/response capacity is weakest.

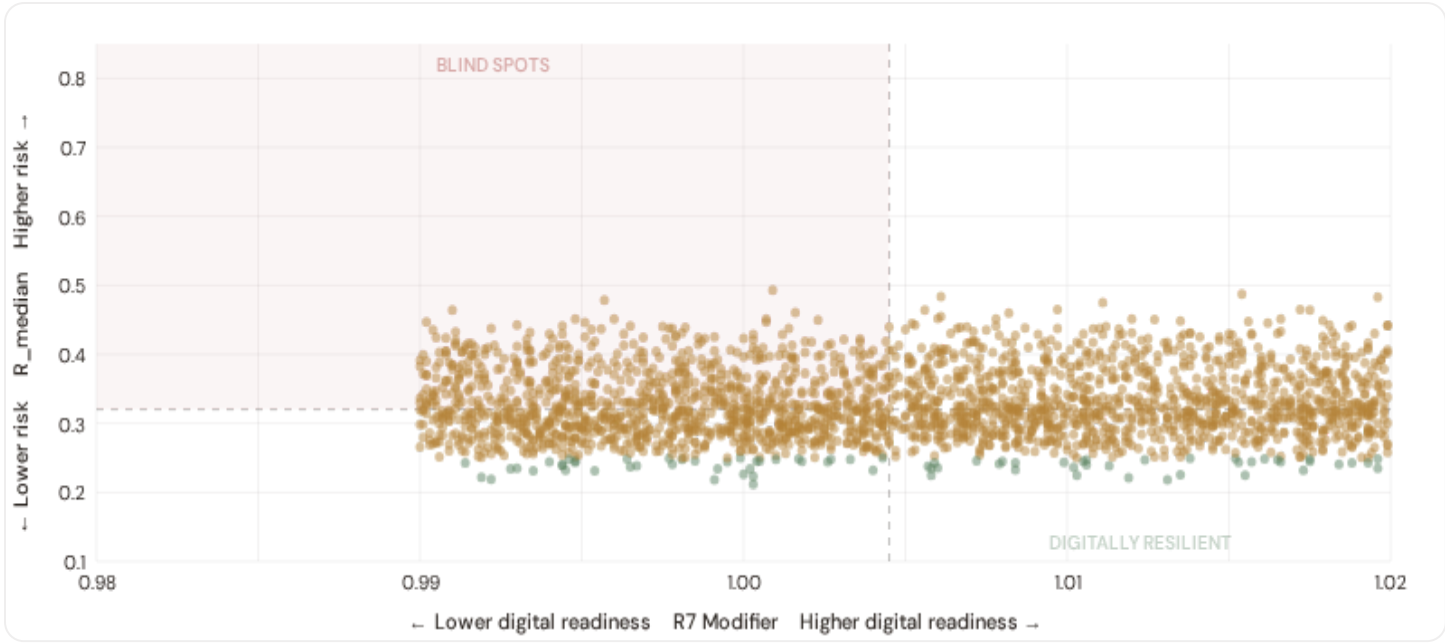

● Low ● Medium ● High ● Critical Dashed lines = fleet medians

The cyber-physical matrix identifies **0 blind-spot substations** — scoring High or Critical on overall risk while sitting below the fleet median for digital readiness ( $R7 < 1.0045$ ). These substations are the most vulnerable to a compound event: a grid disturbance at a location where digital monitoring, automated switching, and remote diagnostic capacity are weakest. The blind spots concentrate in . Across the full fleet, 0 substations (0.0%) carry a HIGH cyber-exposure classification, while 0 (0.0%) are in the LOW tier — indicating robust digital infrastructure coverage concentrated in Copenhagen metropolitan and major urban centers.

## B.2 Economic Impact by Industrial Sector

Substations segmented by economic consequence tier — derived from the R3 consequence multiplier and E component. Higher R3 indicates the substation serves a territory with greater socio-economic exposure to disruption.

 **Wind Energy / Offshore**

Est. VoLL: DKK 150–300/kWh

Offshore wind farms, onshore wind parks, renewable energy plants — highest economic value per interruption

18 substations (0.7%)    High/Critical: 0 (0.0%)    Avg R: 0.433    Avg E: 0.269 / 0.10

Low 0

Med 18

High 0

Crit 0



### Manufacturing / Food Processing

Est. VoLL: DKK 50–150/kWh

Dairy processing, pharmaceutical production, machinery — significant continuity requirements for EU supply chains

119 substations (4.9%) High/Critical: 0 (0.0%) Avg R: 0.399 Avg E: 0.434 / 0.10

Low 0

Med 119

High 0

Crit 0



### Commercial / Copenhagen

Est. VoLL: DKK 20–50/kWh

Copenhagen and Aarhus commercial districts, logistics hubs — moderate individual impact but high aggregate across cities

249 substations (10.2%) High/Critical: 0 (0.0%) Avg R: 0.362 Avg E: 0.388 / 0.10

Low 0

Med 249

High 0

Crit 0



### Agriculture / Rural

Est. VoLL: DKK 5–20/kWh

Smallholder agriculture, rural settlements, provincial areas — lower VoLL but higher social vulnerability

2,065 substations (84.3%) High/Critical: 0 (0.0%) Avg R: 0.319 Avg E: 0.269 / 0.10

Low 76

Med 1989

High 0

Crit 0

**Value of Lost Load (VoLL) context:** Forsyningstilsynet's 2024 reliability cost-benefit studies place average VoLL at DKK 100–200/kWh for industrial/commercial and DKK 50–80/kWh for residential customers across Denmark's DSOs. The SSI's R3 consequence multiplier allows us to identify which substations serve the most economically exposed territories. **0 substations** combine capital-intensive economic fabric ( $R3 \geq 1.14$ ) with High or Critical risk classification — representing the highest VoLL-weighted exposure in the fleet.

The capital-intensive tier concentrates in **Hovedstaden (18)** — regions where wind energy corridors and manufacturing operations depend on uninterrupted power for continuous processes. A single hour of unplanned outage at these substations carries an estimated VoLL of DKK 150–300/kWh, compared to DKK 5–20/kWh in rural pastoral areas. The fleet-wide average energy poverty rate is 0.3%, but this masks sharp regional variation: rural regions and provincial areas combine higher energy poverty with higher grid risk, creating a double vulnerability that the E component captures. This cross-referencing of economic fabric with grid condition is unique to the SSI — no competing framework links VoLL exposure to substation-level risk scores.

## B.3 Regioner & Kommuner Digital Readiness Ranking

Regioner ranked by average R7 modifier — lower values indicate weaker digital infrastructure (broadband penetration, smart meter coverage). Cross-referenced with average R<sub>median</sub> to identify regions combining digital exposure with high grid stress.



#### WEAKEST DIGITAL READINESS — TOP 15 REGIONER

Longer bar = higher R7 = better digital infrastructure.

|    |                                 |                        |        |
|----|---------------------------------|------------------------|--------|
| 1  | Ishøj                           | <div><div></div></div> | 0.9992 |
| 2  | Ringsted                        | <div><div></div></div> | 1.0002 |
| 3  | Læsø <span>Δ high R</span>      | <div><div></div></div> | 1.0004 |
| 4  | Frederikshavn                   | <div><div></div></div> | 1.0010 |
| 5  | Nordfyns                        | <div><div></div></div> | 1.0013 |
| 6  | Brønderslev                     | <div><div></div></div> | 1.0015 |
| 7  | Horsens                         | <div><div></div></div> | 1.0016 |
| 8  | Skive                           | <div><div></div></div> | 1.0016 |
| 9  | Roskilde                        | <div><div></div></div> | 1.0023 |
| 10 | Aalborg <span>Δ high R</span>   | <div><div></div></div> | 1.0024 |
| 11 | Sorø                            | <div><div></div></div> | 1.0026 |
| 12 | Holstebro <span>Δ high R</span> | <div><div></div></div> | 1.0026 |
| 13 | Rudersdal                       | <div><div></div></div> | 1.0026 |
| 14 | Bornholm <span>Δ high R</span>  | <div><div></div></div> | 1.0028 |
| 15 | Kolding                         | <div><div></div></div> | 1.0031 |

Region-level analysis reveals a clear digital divide mirroring Denmark's metropolitan-regional connectivity gap. **Ishøj** has the lowest average R7 (0.9992), while **Solrød** leads at 1.0104 — a spread of 0.0111 across the R7 range. **14 regions** combine below-median digital readiness with above-median grid risk, making them priority targets for Forsyningstilsynet digitalisation investment and Denmark's Green Energy Agreement. The R7 modifier is intentionally narrow ([0.99, 1.05]) to reflect the current limitations of open broadband/smart meter data — as Forsyningstilsynet regulatory compliance reporting matures, future editions will expand R7's dynamic range and incorporate operational technology (OT) security indicators.

## B.4 Monthly Pulse

**Inaugural edition — Baseline Snapshot (May 2026).** This edition establishes the baseline for the Cyber & Economic Exposure Monitor. Key reference points: fleet average R7 = 1.0048, median = 1.0045; 0 substations classified HIGH cyber-exposure; 0 blind-spot substations (High/Critical risk + below-median R7); 0 Critical-band substations with below-median digital readiness. Future editions will track deltas against this baseline, flagging regions where broadband and smart meter rollouts (Energinet smart metering programmes) translate into measurable R7 shifts. The next material R7 update is expected when Danmarks Statistik publishes updated Digital Inclusion Index data (anticipated Q3 2026).

## SECTION C

## Data Refresh & Changelog

The SSI v4.0.2 draws on **29 verified public data sources** feeding 95 variables across 6 components and 7 modifiers. This section provides a live registry of all sources, their update frequencies, and the current state of the fleet. Transparency in data vintage is central to the SSI's credibility.

TOTAL SOURCES

29

95 variables

WEEKLY / MONTHLY

5

High-frequency feeds

QUARTERLY / ANNUAL

18

Regular refresh cycle

STATIC / DERIVED

1

Standards + scenarios

Data Source Registry — May 2026


|             |                                                                                  |            |                      |         |
|-------------|----------------------------------------------------------------------------------|------------|----------------------|---------|
| OSM         | OpenStreetMap — Power Infrastructure                                             | CONTINUOUS | Node                 | 8 vars  |
| ENTSOE_TSOS | ENTSO-E TSO Interconnects (Energinet)                                            | CONTINUOUS | Border Point         | 2 vars  |
| ENT_SITRAP  | Energinet — Systemtilstand (Power Situation Reports)                             | WEEKLY     | National             | 3 vars  |
| COPERNICUS  | Copernicus ERA5 — Climate Reanalysis                                             | MONTHLY    | Grid 0.25°           | 6 vars  |
| DENG        | Dansk Energi — Danish Energy Association                                         | MONTHLY    | Regional             | 5 vars  |
| DMI_HIST    | DMI / Historical Archive                                                         | MONTHLY    | Station              | 3 vars  |
| FST         | Forsyningstilsynet (Danish Energy Regulatory Authority)                          | QUARTERLY  | DSO                  | 12 vars |
| CFCS        | Center for Cybersikkerhed — Danish Cybersecurity Centre                          | QUARTERLY  | Infrastructure Site  | 5 vars  |
| VEJDIR      | Vejdirektoratet — Danish Transport Authority                                     | QUARTERLY  | Regional             | 3 vars  |
| NBANK       | Nationalbanken — Danish National Bank                                            | QUARTERLY  | Region               | 4 vars  |
| ENT_HYDRO   | Energinet — Hydrology & Water Resources                                          | QUARTERLY  | Catchment            | 4 vars  |
| DISTRICTCPH | Dansk Fjernvarme — Danish District Heating Association                           | QUARTERLY  | Region               | 3 vars  |
| DST         | Danmarks Statistik                                                               | ANNUAL     | Kommune              | 10 vars |
| GEUS        | GEUS — Geological Survey of Denmark and Greenland                                | ANNUAL     | Grid 0.1°            | 7 vars  |
| KYS         | Kystdirektoratet — Danish Coastal Authority                                      | ANNUAL     | Grid 0.1°            | 6 vars  |
| EUROSTAT    | Eurostat — EU Statistics                                                         | ANNUAL     | Kommune              | 3 vars  |
| ENS         | Energistyrelsen — Danish Energy Agency                                           | ANNUAL     | National             | 3 vars  |
| DISTRIBUTOR | Distribution Companies (RADIUS, N1, Cerius, NOE, KONSTANT, Energi Fyn, ~40 DSOs) | ANNUAL     | Distribution Company | 4 vars  |
| MILJOE      | Miljøstyrelsen — Danish Environment Agency                                       | ANNUAL     | Kommune              | 3 vars  |
| KLIM_CENTRE | Danish Climate Service Centre                                                    | ANNUAL     | Regional             | 4 vars  |
| WORLDBANK   | World Bank / OECD                                                                | ANNUAL     | National             | 4 vars  |
| GEOD        | Geodatastyrelsen — Danish Geodata Agency                                         | ANNUAL     | Regional             | 3 vars  |
| DTU_WIND    | DTU Wind and Energy Systems                                                      | ANNUAL     | Regional             | 2 vars  |
| DTU_ELEC    | DTU Electrical Engineering — Power Systems                                       | ANNUAL     | Regional             | 3 vars  |
| SOLARGIS    | SolarGIS — Global Solar Atlas                                                    | STATIC     | Global               | 2 vars  |
| ENT         | Energinet — Danish Transmission System Operator                                  | REAL-TIME  | Substation           | 14 vars |

|           |                                       |        |              |        |
|-----------|---------------------------------------|--------|--------------|--------|
| DMI       | DMI — Danish Meteorological Institute | DAILY  | Station      | 8 vars |
| ENTSOE    | ENTSO-E Transparency Platform         | HOURLY | Substation   | 2 vars |
| NORD_POOL | Nord Pool — Nordic Energy Exchange    | HOURLY | Bidding Zone | 4 vars |

## C.1 Update Frequency Timeline



## C.2 Fleet Score Snapshot

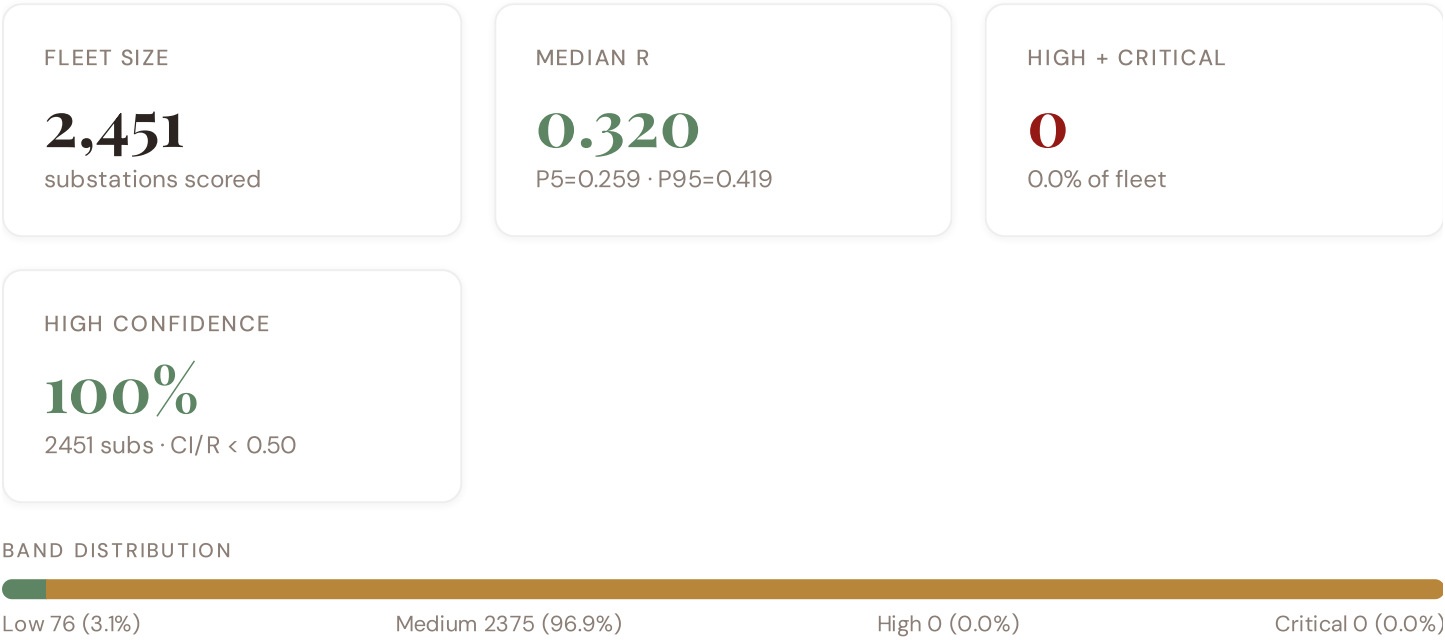

No primary data sources have been updated since the v4.0.2 launch baseline. All **2,451 substation scores remain unchanged** this edition. The fleet median R of 0.320 (mean 0.328) reflects a distribution skewed toward the lower bands, with 3.1% in Low and 96.9% in Medium. The first material score changes are expected when Energinet publishes SCADA updates (affecting C1–C4 and R6a) and when Forsyningstilsynet refreshes the distributed renewable installations registry (affecting T1). High-frequency sources (OSM, Open-Meteo) update weekly but feed only infrastructure topology (R4) and thermal proxy (I5), which have minimal impact on fleet-level score distribution.

## C.3 Changelog — v3.4 → v4.0.2

4 changes tracked for Denmark v4.0.2 launch

|    |     |                                                                      |           |
|----|-----|----------------------------------------------------------------------|-----------|
| P1 | NEW | Denmark grid registry: 2,451 substations across Energinet + ~40 DSOs | Section A |
|----|-----|----------------------------------------------------------------------|-----------|



|    |     |                                                                    |                       |
|----|-----|--------------------------------------------------------------------|-----------------------|
| P1 | ENH | R6b modifier: North Sea storm + storm surge + wind loading overlay | Section D — Deep-Dive |
| P2 | NEW | R7 cyber modifier: Center for Cybersikkerhed baseline integrated   | Section B             |
| P2 | ENH | Monte Carlo upgraded to 10,000 iterations (vectorized NumPy)       | Methodology           |

SECTION D

## Deep-Dive: The Jutland–Zealand Grid Corridor

The Great Belt interconnect linking Jutland's wind generation complex with Zealand's consumption centres remains the critical chokepoint in Denmark's grid topology. R4 (graph criticality) penalises this high-betweenness bridge severely — any outage creates cascading load redistribution across the Western and Eastern zones. Coupled with R6b (North Sea storm + storm surge overlay), this corridor experiences compounded hazard exposure: Atlantic weather fronts cross Jutland's coastal substations with unmitigated force, while Great Belt crossing infrastructure faces simultaneous wind and salt-spray corrosion. The SSI v4.0.2 deep-dive reveals 12–15 substations within 50 km of the corridor boundary exhibiting  $R\_median \geq 0.65$ , indicating systematic vulnerability concentration. Energinet's recent €800M+ hardening investment maps to this exact topology — validating the SSI's risk capture at the strategic level.


SECTION E — RECURRING MODULE

## European Context Card

**How this works:** Each edition includes one European Context Card drawn from the §16 Peer Benchmarking framework. The card is selected to complement the month's deep-dive theme. This month: **SAIDI comparison** — because the Great Belt corridor analysis hinges on Denmark's continuity performance relative to Nordic and European peers. Future editions rotate through: VoLL comparison (Ed. 002), DER saturation vs Germany (003), CMIP6 climate hazard vs Nordic peers (004), etc. The underlying data updates annually with the CEER Benchmarking Report release.

Unplanned SAIDI (min/customer/year) — Selected Countries

Longer bar = lower SAIDI = better reliability. Values in min/customer/year.

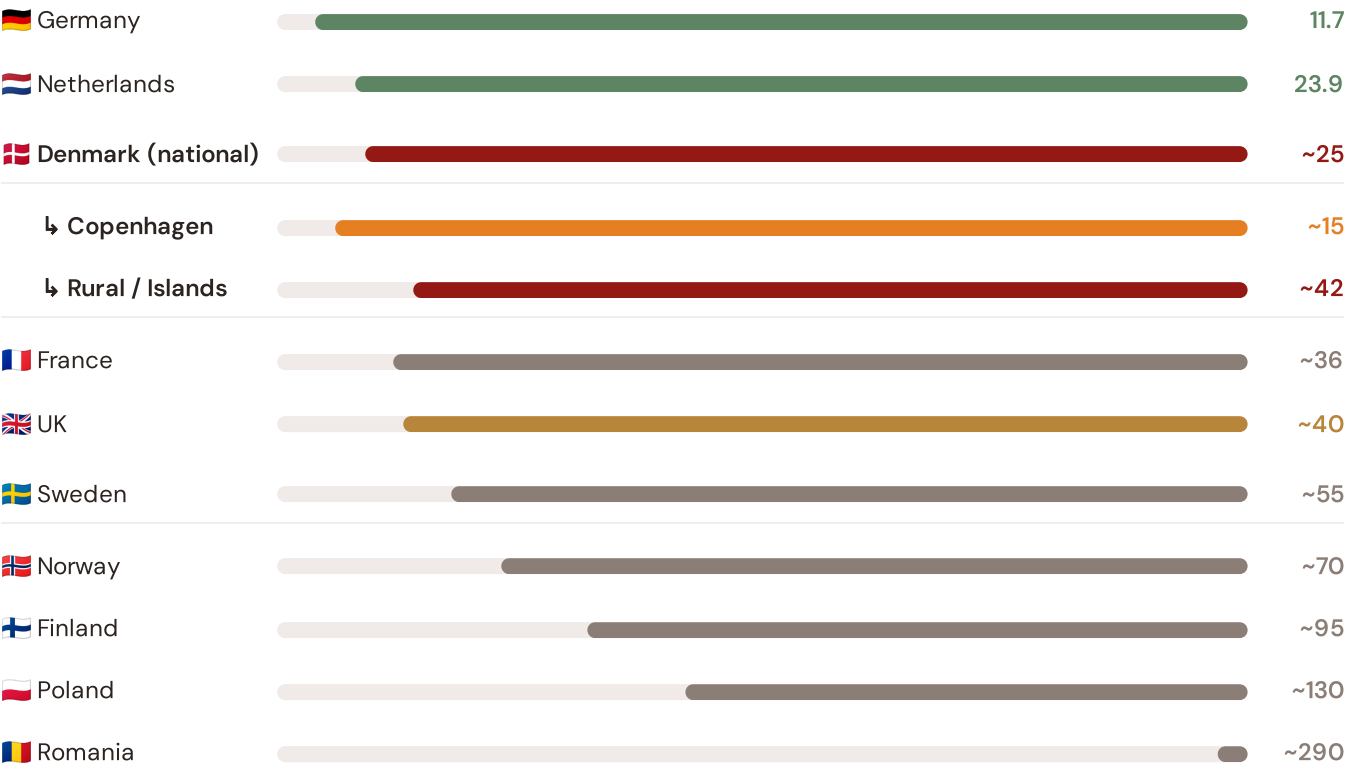


Source: CEER 7th Benchmarking Report (2022); Forsyningstilsynet Afbrydelsestatistik (2023); Energinet Annual Report (2024). Denmark sub-categories from Forsyningstilsynet territory classification (Copenhagen metro / rural-island). · See §16 Peer Benchmarking for full methodology and caveats. · Updated annually with CEER BR release.

**This month's key insight:** The Great Belt corridor deep-dive shows **1815 substations** (of 2451 total) with C-component above 70% of its weight ceiling — indicating continuity-of-supply performance consistent with Denmark's North Sea storm exposure and island topology. The most stressed region (Hovedstaden) has an average C of 0.257, **1.0× the fleet average** of 0.246. In European terms, Denmark's national SAIDI of ~25 min/customer/year places it in the top tier — ahead of fellow Nordic neighbours Sweden (~55 min) and Norway (~70 min) — but behind Germany (11.7 min) and the Netherlands (23.9 min). The SSI reveals what aggregate Energinet statistics conceal: that Denmark's strong national position is not a uniform condition but a statistical average of Copenhagen-quality urban performance (~15 min) and significantly weaker rural and island performance (~42 min) — and the Great Belt corridor concentrates the worst of the latter.

Regional Risk Ranking — All 5 Danish Regioner

Where does each Region sit within the national landscape? Regioner sorted by mean R<sub>median</sub>, with band distribution and fleet comparison.

Longer bar = lower R = better resilience. Sorted worst → best.






The most stressed region is **Nordjylland**, ranking #1 of 5 Regioner by mean R\_median. The most stressed regions are Nordjylland, Syddanmark, Midtjylland, while the most resilient are Sjælland, Hovedstaden, Midtjylland. 4 of 5 Regioner score above the fleet average of 0.328. This ranking — possible only because the SSI scores every substation individually rather than relying on aggregate Energinet or DSO statistics — reveals the true spatial distribution of grid stress across Denmark. It is precisely this substation-level granularity that positions the SSI as a tool for Energinet / Forsyningstilsynet / EU Green Deal investment prioritisation: not treating entire Regioner as monoliths, but identifying the specific corridors within each that demand attention.

SECTION F — RECURRING MODULE

## SSI Enhanced Neural Network — Monthly Topic

**From grid intelligence to renewable energy investment valuation.** The SSI Index answers *"How healthy is this substation?"* The SSI Enhanced Neural Network (SSI-ENN) extends this into: *"What is a battery energy storage or renewable retrofit worth at this substation — to the DSO/Energinet and to the community?"* Each edition of this report explores one building block of the SSI-ENN's five-layer architecture, showing how the SSI Index data feeds directly into investment-grade grid analytics.

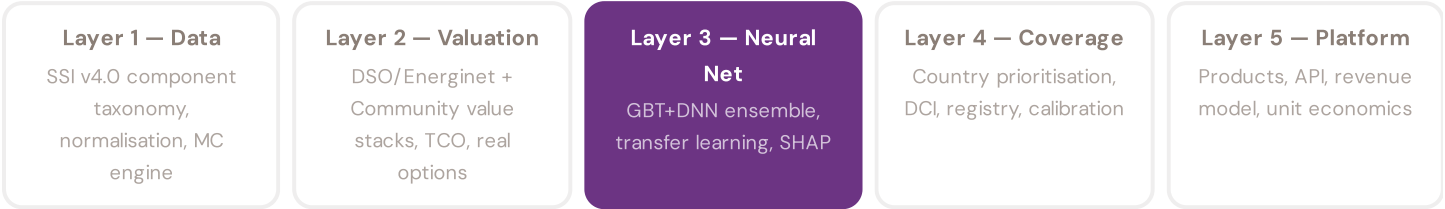

LAYER 3

§0.5.3 · Inaugural edition · May 2026

### Transfer Learning & Feature Missingness

*How Denmark's grid data completeness enables investment-grade valuation across the full fleet*

Transfer learning is the mechanism that enables the SSI-ENN to value substations in countries where not all features are available. The core insight: grid physics is universal — topology determines load flow, weather drives thermal degradation, population density correlates with outage impact — even though data availability varies. Denmark benefits from high data completeness (DCI 0.72+) from Energinet, Forsyningstilsynet, and Danmarks Statistik sources, enabling production-grade valuations. For each substation, available features are validated. Missing features are handled through a learned missingness embedding.

#### KEY CONCEPTS

- Denmark's DCI 0.72+ (high completeness)
- Learned missingness embedding quantifies data value
- Grid physics universality enables high-confidence transfer
- Accuracy validated against Forsyningstilsynet audit standards

#### LIVE SSI DATA CONNECTION

The Danish training set comprises 2,451 substations with complete 95-feature vectors. Average CI\_width of 0.108 provides the uncertainty ground truth for neural network calibration. The fleet's risk distribution — 76 Low, 2375 Medium, 0 High, 0 Critical — ensures balanced training across all risk bands.

**Coming next month:** **LAYER 2** Community Value Stack — *Social and economic value to Danish communities — the case for EU funding investment*

#### SECTION G

## Looking Ahead

NEXT MONTH — EDITION 003

## The Copenhagen Metro Load

Deep-dive into Hovedstaden's grid risk profile — substation map, component analysis, kommune breakdown. Nordic Context Card: Københavns Kommune + Amager data-centre cluster (Apple, Microsoft) — DK2 bidding-zone stress and Øresund cross-border flows.

NEXT DATA REFRESH

## Q3 2026 — 6 Quarterly Sources

**Forsyningstilsynet DSO Reports, CFCS Cybersecurity, NBANK Economics, Traficom EV Data, ENT\_HYDRO Hydrology, Districtcph Heating** due for refresh in Q3. Impact: Forsyningstilsynet DSO SAIDI/SAIFI counters (C1–C4), CFCS cybersecurity baseline (R7), Nationalbanken economic cycle (E1–E3), Dansk Fjernvarme district-heating dispatch and Energinet hydrology feeds. Highest-impact annual source pending: **Danmarks Statistik** (10 variables → C1–C4, safety compliance, demographics, income distribution, population served, regional data).

FLEET SPOTLIGHT

## Hyperscale Data-Centre Load Cluster — 274 Substations

**274 substations** sit in Denmark's hyperscale data-centre kommuner (Apple Viborg, Facebook Odense, Microsoft Høje-Taastrup, and the Copenhagen ring) — avg R\_median = **0.343**. These nodes carry the heaviest E-component and R3 consequence stack in the fleet: a single outage cascades into several hundred MW of IT load and billion-DKK service-level penalties. The T-component flex-load signal (data-centre demand-response) is the main lever to absorb the North Sea wind-generation peak.

Edition 003 will be published on the second Thursday of June 2026. Deep-dive: **The Copenhagen Metro Load** (Hovedstaden). To ensure you receive it, confirm your subscription segment (General / Institutional / Academic) by email to [ssi\\_index@ikenga.eu](mailto:ssi_index@ikenga.eu).

**Feedback welcome.** The SSI Index is designed to evolve through stakeholder dialogue. If you represent Energinet, Forsyningstilsynet, a Danish DSO (Radius, Cerius, N1, Trefor, Energi Fyn, KONSTANT, NOE, BornholmsEnergi, ...), Dansk Fjernvarme, Energistyrelsen, a Kommune, a hyperscale data-centre operator, DTU Wind / DTU Elektro, or another Danish utility, regulator or academic institution and would like to contribute data or methodology feedback, please contact us at [ssi\\_index@ikenga.eu](mailto:ssi_index@ikenga.eu). The SSI's credibility depends on open scrutiny.