

Substation ESG Report

Substation-level Environmental, Social, and Governance assessment aligned to CSRD/ESRS, EU Taxonomy, TCFD, SFDR, and UN PRI frameworks. Updated annually via the SSI Index scoring engine.

SUBSTATION

60/10 kV
Rynkeby

DK_0644 · Kerteminde,
Syddanmark

SSI SCORE (R_{MEDIAN})

0.307

● Medium Risk 37.9th
percentile

VOLTAGE CLASS

60 kV

Distribution

CONFIDENCE INTERVAL

0.259 – 0.362

P5–P95 · CI width 0.103 ·
medium confidence

MARKOV ETTC

50 yr

Expected time to criticality


DER PENETRATION

0.274

T1 transition stress score

Component Fingerprint


Six-component weighted decomposition of the SSI composite score — the substation's structural risk profile

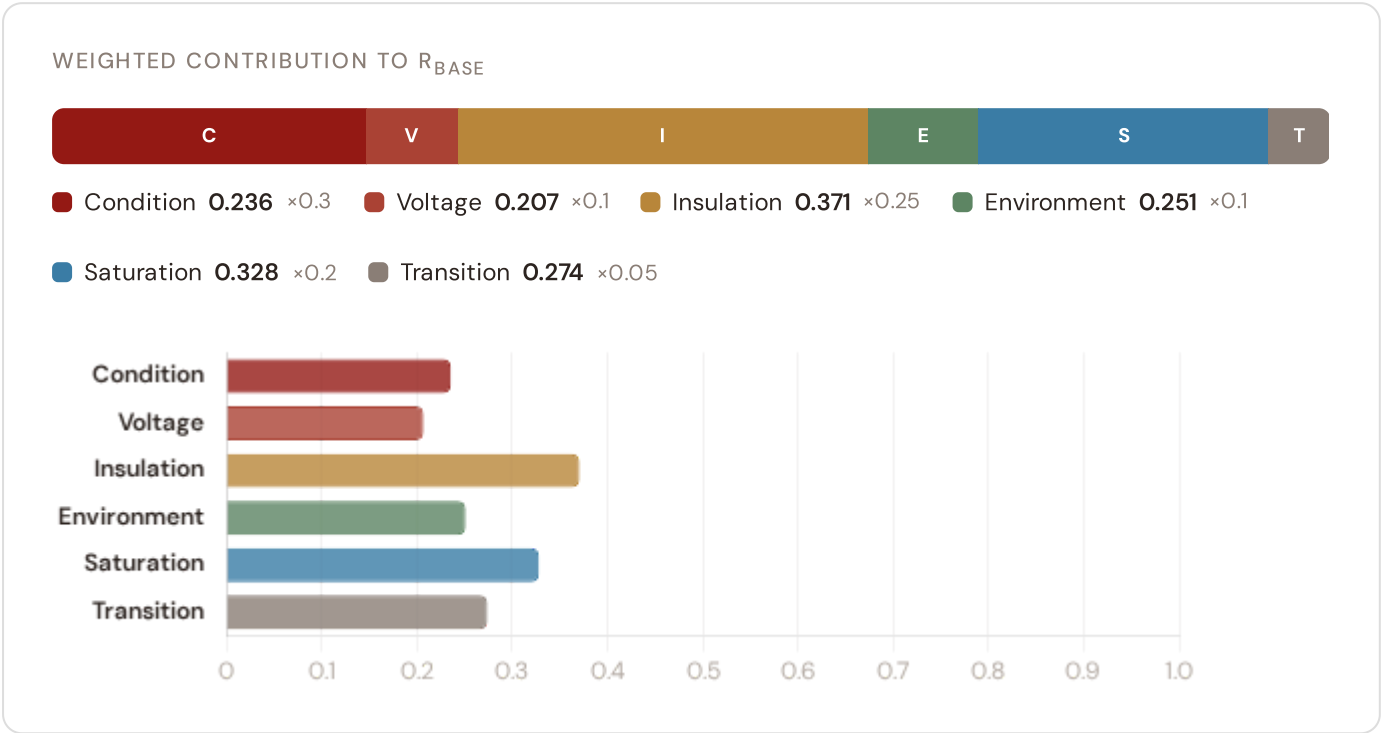

Markov Degradation Profile

CIGRE TB 761 five-state condition model — steady-state probability distribution and expected time to criticality

STEADY-STATE DISTRIBUTION

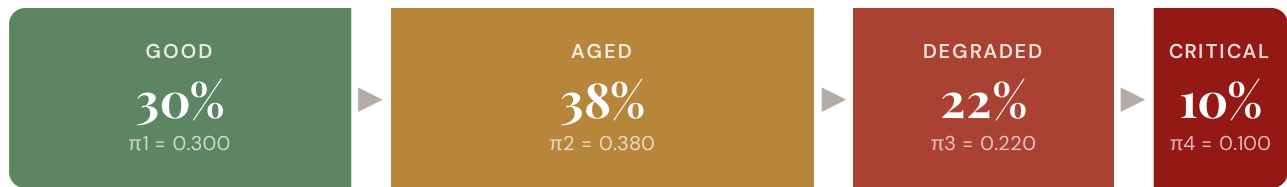

Markov 5-state model calibrated from CIGRE Technical Brochure 761 (2019). States represent asset condition from new/good through critical. Steady-state probabilities indicate the long-run proportion of time the asset spends in each condition state given current operating environment.

RISK SCORE

0.349

Composite Markov risk

ETTC

50 yr

Expected time to critical

P(CRITICAL) 20YR

0.0%

Probability of reaching critical

CORROSION


C2

ISO 9223 classification



ESG Radar — Six-Report Overview

Composite readiness across 6 ESG dimensions, each linked to UN Sustainable Development Goals

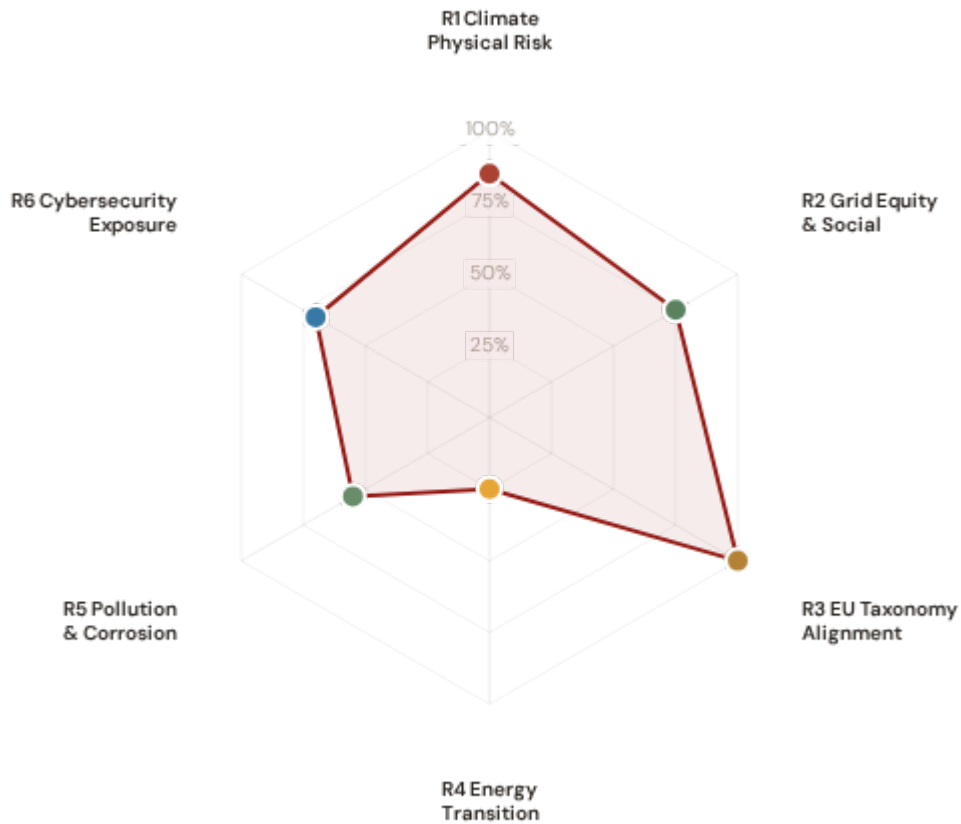

R1 · Climate Physical Risk Assessment **READY**

SDG 13 Climate Action · SDG 9 · SDG 11

SDG 13

SDG 9

SDG 11

R2 · Grid Equity & Social Vulnerability **PARTIAL**

SDG 7 Affordable and Clean Energy · SDG 10 · SDG 1

SDG 7

SDG 10

SDG 1

R3 · EU Taxonomy Alignment **READY**

SDG 9 Industry, Innovation, Infrastructure · SDG 13 · SDG 12

SDG 9

SDG 13

SDG 12

R4 · Energy Transition & DER Stress **GAP**

SDG 7 Affordable and Clean Energy · SDG 13 · SDG 9

SDG 7

SDG 13

SDG 9

R5 · Pollution & Corrosion **PARTIAL**

SDG 11 Sustainable Cities and Communities · SDG 3 · SDG 15

SDG 11

SDG 3

SDG 15

1

Climate Physical Risk Assessment

ESRS E1 · TCFD Physical Risk · EU Taxonomy Annex A

READY

WHY THIS REPORT EXISTS

ESRS E1 (Climate Change) is material for 98% of CSRD-reporting companies. TCFD physical risk disclosure is mandatory in 36+ jurisdictions. The EU Taxonomy requires climate change adaptation activities to demonstrate that physical climate risks have been identified and addressed. This report quantifies acute and chronic climate hazard exposure at substation level using ERA5 reanalysis and Markov degradation modelling.

SDG Alignment

SDG 13 — Climate Action (primary)

Target 13.1 calls for strengthening resilience and adaptive capacity to climate-related hazards. The SSI IRI metrics (snow/ice, wind, heat stress) and Markov degradation model directly quantify how climate hazards affect this substation's operational resilience over 10- and 20-year horizons. With a Markov risk score of 0.349 and ETTC of 50 years, this substation's climate trajectory can be assessed against TCFD physical risk and EU Taxonomy adaptation screening requirements.

SDG 13

SDG 9

SDG 11

Substation Profile

Insulation Risk (I component)	0.371
Environment Component (E)	0.251
Markov Risk Score	0.349
ETTC (time to criticality)	50 years
P(critical) at 20 years	0.0%
Corrosion Class	C2

SSI Variables Feeding This Report

SSI VARIABLE	VALUE	ESG DISCLOSURE REQUIREMENT	STATUS
I1 Snow/Ice IRI	0.130	ESRS E1-9: Financial effects from physical risks	READY
I2 Storm IRI	0.111	TCFD Strategy (b): Physical risk impact	READY
I3 Heat-wave IRI	0.074	EU Taxonomy Annex A: Heat stress	READY
I5 Thermal stress	0.056	ESRS E1-4: Climate mitigation targets	READY
Markov Risk score	0.349	TCFD Risk Management: Risk identification	READY
P_crit P(critical) 20yr	0.0%	ESRS E1-9: Time horizons	READY

Data Sources & Vintage

ERA5 Climate Reanalysis Copernicus CDS	2024 Weekly
North Sea Storm Hindcast Danmarks Meteorologiske Institut (DMI)	2024 Multi-year
Coastal Geology & Storm Surge GEUS (De Nationale Geologiske Undersogelser)	2023 Multi-year
Weather Data DMI (Danmarks Meteorologiske Institut)	2024 Daily
IEEE C57.91 Thermal Model IEEE	Standard N/A
CIGRE TB 761 Markov CIGRE	2019 N/A
CMIP6 SSP2-4.5 Projections Copernicus CDS	— Not ingested

TECHNICAL VALIDITY

IRI metrics are computed from ERA5 reanalysis (31 km, hourly, 1940–present) using IEEE C57.91 thermal loading curves. Markov 5–state degradation is calibrated from CIGRE Technical Brochure 761 (2019) condition assessment data. All inputs are production–grade with institutional provenance.

WHY THIS REPORT EXISTS

ESRS S2 requires companies to disclose impacts on affected communities. SFDR mandates 5 social PAI indicators. The SSI Index is uniquely positioned here because no competing grid risk framework integrates socio-economic vulnerability at substation resolution. This report surfaces where infrastructure risk concentrates in economically disadvantaged populations.

SDG Alignment

SDG 7 — Affordable and Clean Energy (primary)

Target 7.1 requires universal access to affordable, reliable energy. This substation serves a catchment with V_socio of 0.19. The R3 social modifier (1.000) amplifies risk scores in regions with high unemployment, elderly concentration, and net outward migration — making spatial inequality visible and quantifiable at asset level.

SDG 7

SDG 10

SDG 1

Substation Profile

V_socio (energy poverty index)	0.19
EP Rate (energy poverty %)	0.27%
Unemployment Rate	4.1%
GDP per Capita	DKK 57,660
R&D % of GDP	0.0419%
R3 Social Multiplier	1.000
Elderly Vulnerability	0.211%
Migration Score	0.04

SSI Variables Feeding This Report

SSI VARIABLE	VALUE	ESG DISCLOSURE REQUIREMENT	STATUS
V_socio Energy poverty index	0.19	ESRS S2-4: Impacts on affected communities	READY
EP_rate Energy poverty rate	0.27%	SFDR PAI #14: Fossil fuel exposure proxy	READY
R3 Social multiplier	1.000	ESRS S1-6: Workforce characteristics	READY

Data Sources & Vintage

Population & Economics Danmarks Statistik	2023 Annual
Energy Market Data Energinet	2023 Annual
DSO Reliability Metrics Forsyningstilsynet	2023 Annual

TECHNICAL VALIDITY

V_socio is computed from the LIHC (Low Income High Cost) energy poverty definition using Danmarks Statistik household expenditure data. The R3 modifier amplifies infrastructure risk scores in catchments with high unemployment, elderly concentration, and net outward migration.

3

EU Taxonomy Alignment

Climate Delegated Act · Article 11 Climate Adaptation · Technical Screening Criteria

READY

WHY THIS REPORT EXISTS

The EU Taxonomy defines technical screening criteria for climate change adaptation in infrastructure. This is the lowest-hanging ESG product from the SSI Index — READY for 9 of 10 countries today. The SSI composite score (R_median), 6 components, modifier architecture, and Markov risk outputs provide the quantitative evidence base for Article 11 screening at asset level.

SDG Alignment

SDG 9 — Industry, Innovation, Infrastructure (primary)

Target 9.4 calls for upgrading infrastructure to make it sustainable. The EU Taxonomy is the regulatory instrument that translates SDG 9 into investable criteria. By classifying this substation against Article 11 technical screening criteria — using R_median (0.307), all 6 components, and 5 modifiers — this report provides asset-level Taxonomy alignment that enables sustainable finance reporting.

SDG 9

SDG 13

SDG 12

Substation Profile

R_median (composite)	0.307
R_base (pre-modifier)	0.289
Modifier Impact	6.5%%
C (Condition)	0.236
V (Voltage)	0.207
I (Insulation/Climate)	0.371
E (Environment)	0.251
S (Saturation)	0.328
T (Transition)	0.274

SSI Variables Feeding This Report

SSI VARIABLE	VALUE	ESG DISCLOSURE REQUIREMENT	STATUS
R_median Composite score	0.307	EU Taxonomy Art. 11: Adaptation screening	READY
6 Comp. C/V/I/E/S/T	All present	EU Taxonomy TSC: Physical risk identification	READY
R3-R7 Modifier suite	All applied	ESRS E1: Adaptation measures evidence	READY
Markov Degradation model	0.349	TCFD: Forward-looking risk assessment	READY
R5 Asymmetric CI	0.103	ESRS: Uncertainty quantification	READY

Data Sources & Vintage

ERA5 Climate Reanalysis Copernicus CDS	2024 Weekly
North Sea Storm Hindcast Danmarks Meteorologiske Institut (DMI)	2024 Multi-year
Population & Economics Danmarks Statistik	2023 Annual
CIGRE TB 761 Markov CIGRE	2019 N/A

TECHNICAL VALIDITY

Article 11 screening uses the full SSI v4.0.2 scoring engine: 6-component weighted composite (C=0.30, V=0.10, I=0.25, E=0.10, S=0.20, T=0.05), Gaussian copula Monte Carlo (10,000 iterations), and 5 modifiers (R3 social, R4 topology, R5 asymmetric CI, R6a restoration, R7 cyber). The Markov 5-state degradation model provides the forward-looking element.

The energy transition creates infrastructure stress — bidirectional power flows, EV charging load, and intermittent renewable output strain substations designed for unidirectional delivery. Denmark's aggressive offshore wind programme (7+ GW) makes this report particularly material: grid infrastructure must keep pace with decarbonisation ambition.

SDG Alignment

SDG 7 — Affordable and Clean Energy (primary)

Target 7.2 requires substantially increasing the share of renewable energy. This substation has a DER penetration of 32.1%. The T1_score (0.274) measures the stress this places on the substation.

SDG 7

SDG 13

SDG 9

Substation Profile

T1 Score (transition stress)	0.274
DER Penetration	32.1%
Wind Capacity	393.3 MW
EV Fleet Share	16.4%
RE Share (local)	49.7%
T Component Weight	0.05

SSI Variables Feeding This Report

SSI VARIABLE	VALUE	ESG DISCLOSURE REQUIREMENT	STATUS
T1 Transition stress score	0.274	ESRS E1: Transition plan assessment	READY
DER DER penetration	32.1%	TCFD Transition: Technology risk	READY
Wind Wind capacity (MW)	393.3	EU Green Deal: Grid flexibility	READY
EV EV fleet share	16.4%	SDG 7: Clean energy access	READY

Data Sources & Vintage

Energy Market Data
Energinet

2023 Annual

DSO Reliability Metrics
Forsyningstilsynet

2023 Annual

Renewable Installations
DataHub / Energinet

2024 Monthly

Smart Meter Data
DataHub

2024 Monthly

TECHNICAL VALIDITY

T1_score is the weighted composite of DER_ratio (renewable generation vs. local demand), DER_variability (intermittency), and EV_load_ratio (electric vehicle charging load as fraction of capacity). DER data sourced from Energinet and DataHub.

5 Pollution & Corrosion

ESRS E2 Pollution · ISO 9223 Corrosion Classification · Environmental Impact

PARTIAL

WHY THIS REPORT EXISTS

Transformer oil degradation, SF6 leakage, and corrosion-driven failures release pollutants affecting local environments. ESRS E2 requires disclosure of pollution risks. Denmark's coastal substations face elevated salt-spray corrosion — the ISO 9223 classification captures this maritime exposure.

SDG Alignment

SDG 11 — Sustainable Cities and Communities (primary)

Target 11.6 aims to reduce the adverse environmental impact of cities. The corrosion class (C2) and E component (0.251) track environmental degradation and pollution sensitivity at asset level.

SDG 11

SDG 3

SDG 15

Substation Profile

Corrosion Class (ISO 9223)	C2
E2 Local Enrichment	0.14
E Component Score	0.251
Markov Risk Score	0.349

SSI Variables Feeding This Report

SSI VARIABLE	VALUE	ESG DISCLOSURE REQUIREMENT	STATUS
Corrosion ISO 9223 class	C2	ESRS E2: Pollution risk classification	READY
E2_local Environmental sensitivity	0.14	ESRS E2: Local environmental impact	READY
E Environment component	0.251	ISO 9223: Atmospheric corrosion	READY

Data Sources & Vintage

Environmental Data Miljøstyrelsen (Danish EPA)	2023 Annual
ISO 9223 Corrosion ISO	2012 N/A

TECHNICAL VALIDITY

Corrosion class follows ISO 9223:2012 atmospheric corrosion classification (C1–CX). Denmark's maritime climate produces elevated corrosion in coastal zones. Full validation requires Miljøstyrelsen air quality monitoring overlay at substation coordinates.

6 Cybersecurity Exposure

NIS2 Directive · ENISA Cybersecurity Index · ESRS G1 Governance

PARTIAL

WHY THIS REPORT EXISTS

The NIS2 Directive mandates cybersecurity risk management for energy operators. A grid that is physically resilient but cyber-vulnerable is not truly resilient. The SSI R7 modifier combines SCADA assessment, communication architecture analysis, and national-level cyber maturity (ENISA/DESI indices) to produce a substation-level digital vulnerability score.

SDG Alignment

SDG 9 — Industry, Innovation, Infrastructure (primary)

Target 9.1 calls for resilient infrastructure — in digitalised grid systems, this must include cyber resilience. The R7 modifier (1.001) assesses digital vulnerability combining SCADA exposure, communication protocol security, and national cyber maturity.

SDG 9

SDG 16

Substation Profile

R7 Cyber Modifier	1.001
Graph Degree (topology)	3
BC Percentile (centrality)	0.121
Is Bridge Node	No
Cluster Coefficient	0.3500

SSI Variables Feeding This Report

SSI VARIABLE	VALUE	ESG DISCLOSURE REQUIREMENT	STATUS
R7 Cyber modifier	1.001	NIS2: Cybersecurity risk management	READY
BC Betweenness centrality	0.121	ESRS G1: Governance & topology risk	READY
Degree Graph degree	3	Grid resilience: Connectivity	READY

Data Sources & Vintage

Smart Meter Data	2024 Monthly
DataHub	
Cybersecurity Index	2024 Biennial
ENISA	
DESI Connectivity	2024 Annual
European Commission	

TECHNICAL VALIDITY

R7_cyber is computed from a weighted combination of: (1) national cyber maturity via ENISA Cybersecurity Index and EU DESI connectivity indicators, (2) graph topology vulnerability (betweenness centrality = single-point-of-failure risk), and (3) SCADA protocol exposure assessment.

C

Audit Trail & Methodology Note

Traceability for CSRD Article 29a limited assurance

ITEM	VALUE
Scoring Engine	SSI Index v4.0.2 — Gaussian copula Monte Carlo (10,000 iterations)
Weight Architecture	C=0.30, V=0.10, I=0.25, E=0.10, S=0.20, T=0.05
Modifiers Applied	R3 C_mult: 1.000, R4 F_topo: 1.000, R6 restoration: 1.047, R6 seismic: 1.018, R7 cyber: 1.001
Degradation Model	Markov 5-state, CIGRE TB 761 calibration
Thermal Model	IEEE C57.91 transformer loading curves
Report Date	17 March 2026
Reporting Period	Calendar year 2025
Refresh Cadence	Annual (data ingestion → scoring engine → display)
Substation	60/10 kV Rynkeby (DK_0644)
Data Assurance Level	All inputs from institutional open-source with citable vintage

