

Whit Jet/Rocket Engine

(!) A complete and flying aircraft can be fully casted, and produced by humanoid robots or robotic arms, with zero human input once set and running.

(Z)
Temperature realistic expectations in range between the Low melting point in temperature Celsius (°C), as seen below. Metal melting point range is dictated by the ore contraction, as to say purity, and compression of said ore. **Even Impurities**, The presence of other elements like silicon, aluminum, and manganese in the ore sample affects the overall melting point, in example impurities of graphite in ore sample, can lead to increased melting point of ore sample.


Metal	Low Melting Point (°C)	High Melting Point (°C)
Aluminum	660	1200
Brass	800	1652
Steel (Graphite Mixture)	2500	3050
Copper	1084	1983
Gold	1063	1945
Lead	328	622
Iron	1,538	2800
Platinum	1770	3218
Silver	961	1762
Steel (Aluminium Mixture)	1200	2500
Titanium	1670	3038
Tungsten	3400	6152
Non Metals		
Graphite	2800	3500
Flame Temperature		
Fuels		

Jet Fuel	416~500	816
Jet Fuel (Oxygen Mixture)	816	2000 (Rare)

Only one temperature in the example below is required to be aware of, the temperature of your metal casting ore choice, in example graphite enriched steel, 2500 celsius and the flame temperature of fuel choice, in example Jet fuel, 1000 Celsius, due to oxygen rich combustion chamber.

A oxygen jet fuel mixture can be used for higher flame temperature for increased heat pressure/ production, which in turn reduces the amount of time required for desired re fuelling time span, as to say in easy terms, the hotter the flame burns in the combustion chamber, the more heat pressure the combustion chamber produces, which in turn reduces the time required for ample enough pressure buildup for desired flight.

(S) Cockpit Sample

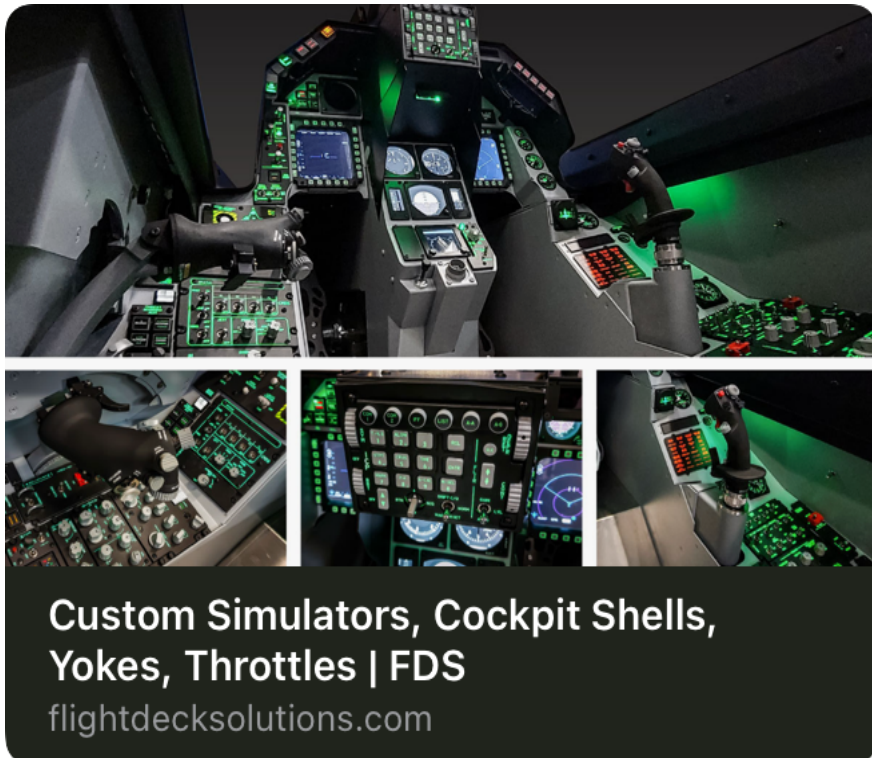

(S.0) Demo/sample Cockpit Chair in Frame. For custom design.



(!Racing frames are not specifically designed for Ground vehicles only)
(!In a craft manufactured with dense metals, such as iron, titanium and etc,
A "crash bar/crash frame" is not needed)

Aircraft simulator chair setup that can be plugged into the Egr valves electric motor control switch, the plug and play version, with a auto align EGr valve/exhaust/outlet locations with the Software. With a modern cockpit layout/design or aggressive design/layout. Has a software you can also add flight pathes and auto pilot, straight out the box, with the GPT voice Ai capasity. For GPT AI auto pilot and navigation. It comes with a SDK for the exhaust points/EGr valves.

(S.1) Unitree L2 Lidar, depth camera, wide-angle 3D radar


Unitree 4D LiDAR L2 | Unitree...

The 4D LiDAR produced by Unitree i...
unitree.com



(S.2) Flight Sensors / Inputs

BerryGPS-IMU

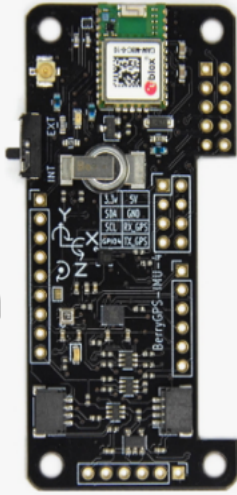

GPS
Accelerometer
Gyroscope
Magnetometer
Barometric/altitude
Temperature

BerryGPS-IMU V4

ozzmaker.com

(S.3) AUMA SEVEN ECOTRON Actuator, [[LINK](#)]

Inquire the pure copper unit (100/99% Cu)

SIPOS Aktorik GmbH - Products - SIPOS 5 actuators - ECOTRO...

sipos.de



(S1.4)

(S1.5) Flight Axis And Throttle Joysticks (Sample A)



HOTAS WARTHOG™
shop.thrustmaster.com

Sample B



HOTAS Flight Control System & Mount for Windows 11/10

horieurope.com

Sample C



HOTAS Flight Stick for Xbox Series X|S

horieurope.com

(S1.6) Throttle Joystick Sample D



PC

VIPER TQS MISSION PACK

shop.thrustmaster.com

(S1.7) Pedals for Ground Wheel/electric Motor Control (Sample A)



T.FLIGHT RUDDER PEDALS

shop.thrustmaster.com

Joystick / Cockpit Controls



Mini PC / ECU (GPT)

↓ (translated PWM / digital commands)

Outlet Control SDK

(S1.3) GPT AI Autonomous Flight. (ECU DEMO, AI 1.0)

Flight Sensors / Inputs (All in one unit)

- IMU (Gyro, Accelerometer)
- GPS / GNSS
- Barometer / Altimeter
- Airspeed Measurement System/sensor
- Cameras / LiDAR / Radar

- Joystick/flight simulator cockpit output (manual override)



Mini PC / GPT ECU

- Receives all sensor inputs
- Maintains flight state
- Plans trajectory / altitude
- Generates control outputs for pressure outlet valve electric motors
- Handles collision avoidance
- Can override manual inputs in risk environments.
- Can Handle rapid stabilization via a gyro sensor module.



Actuators / Motors / Control Surfaces / EGR / Thrust

- Executes GPT flight commands/Outlet valve open and closed positions
- Feedback to GPT via open and close sensory calculations.

(S.5) ECU with soldered away WiFi/internet and bluetooth connectivity



Or



Mac Studio

apple.com

Mini Pc with a CMD software installed with GPT source code, and with a Efficient Cooling System. Equipped with two efficient and silent cooling fans, it rapidly reduces the temperature of the internal power supply, ensuring continuous and stable power delivery. Phase change cooling materials swiftly capture heat, which is efficiently conducted away by dual pure copper heat pipes. Even under high loads, it quickly dissipates heat to maintain stable PC operation.

The Power on and off button can be physically removed, while placing the ECU at a contact turned on state.

The ECU uses a AMD Ryzen AI 9 HX **370**, **12** cores, **24** threads, 5.1GHz cpu clock Speed, and 128 Gigabytes of DDR5 (SO-DIMMx2) 5600MT/s memory,

The first example ECU also uses 2xM.2 2280 NVME SSD Slot with up to 4 Terabyte Storage via a PCIe4.0x4 connection or 1xM.2 2280 NVME SSD Slot with up to 4 Terabyte storage via a PCIe4.0x1 connection.

USB extension. Due to lack of USB ports, a USB external extension unit will be required. Can be bolted/welded to the chassi of the ECU. The plugged in USB cables to The ECU can be attached physically to the ECU, via soldering, in turn, keeping the USB cables connected consistently and constantly. With no vibrational issues, as to say, a vibration caused a USB cable to "unplug/pull out".

The Secound example ECU is by default encrypted, no remote back emd changes should be possible by foreign bodies, perhaps a remote viewing/display if a monitor is plugged in, but no source code can removed or altered remotely. The secound example ECU can be configured

without a bluetooth and wifi adapters/components on the motherboard.

(S.6) ECU GPT software Source Code (Stage one)

If the ECU source code one completely written is installed on a ECU with no bluetooth or wifi connection, and the code is proof read, its bullet proof and cant be remotely edited or controlled by foreign bodies. A offline ECU.

With a source code for Verbal password for voice commands and Face recognition and voice recognition, the autonomous flight can only be used by a pre defined user/owner, removing the risk of a foreign buddy controlling the autonomous flight AI.

(section not yet implemented fully—only placeholders for 3D facial images and voice profiles/recording)

(S1.7)




A complete turbine and a compression chamber with vacuum fans pre installed can be manufactured by a Turbine manufacturer with a custom manufacturing capacity. A steam turbine compressor by the way, which is usually used for electricity production, is also the same component of a jet/rocket engine main compressor mechanism, they function exactly the same, it compresses steam/gas/smoke/heat to propel an alternator, said compressed gas/steam/smoke when released can also propel a flying craft forward. Inquire a steam turbine compressor with a inbuilt fuel combustion chamber and a compressed exhaust outlet section/pipe.

(!) A complete turbine and pressure/exhaust/gas pipes/tubes/lines and a compression chamber

with vacuum fans pre installed can also be casted/produced by a sand caster in combination with a furnace, even an electric motor can be spun with the by a high speed coil spinner in combination with a furnace and sand caster.

(S1.1.4) Example image of a compressor without a combustion chamber or External Internal Vacuum Fan rotational force Production. Said steam turbine compressors marketed for electricity production can be purchased with ease in huge quantities in our current market conditions.

Unmatched/undescribed
holes can be ignored

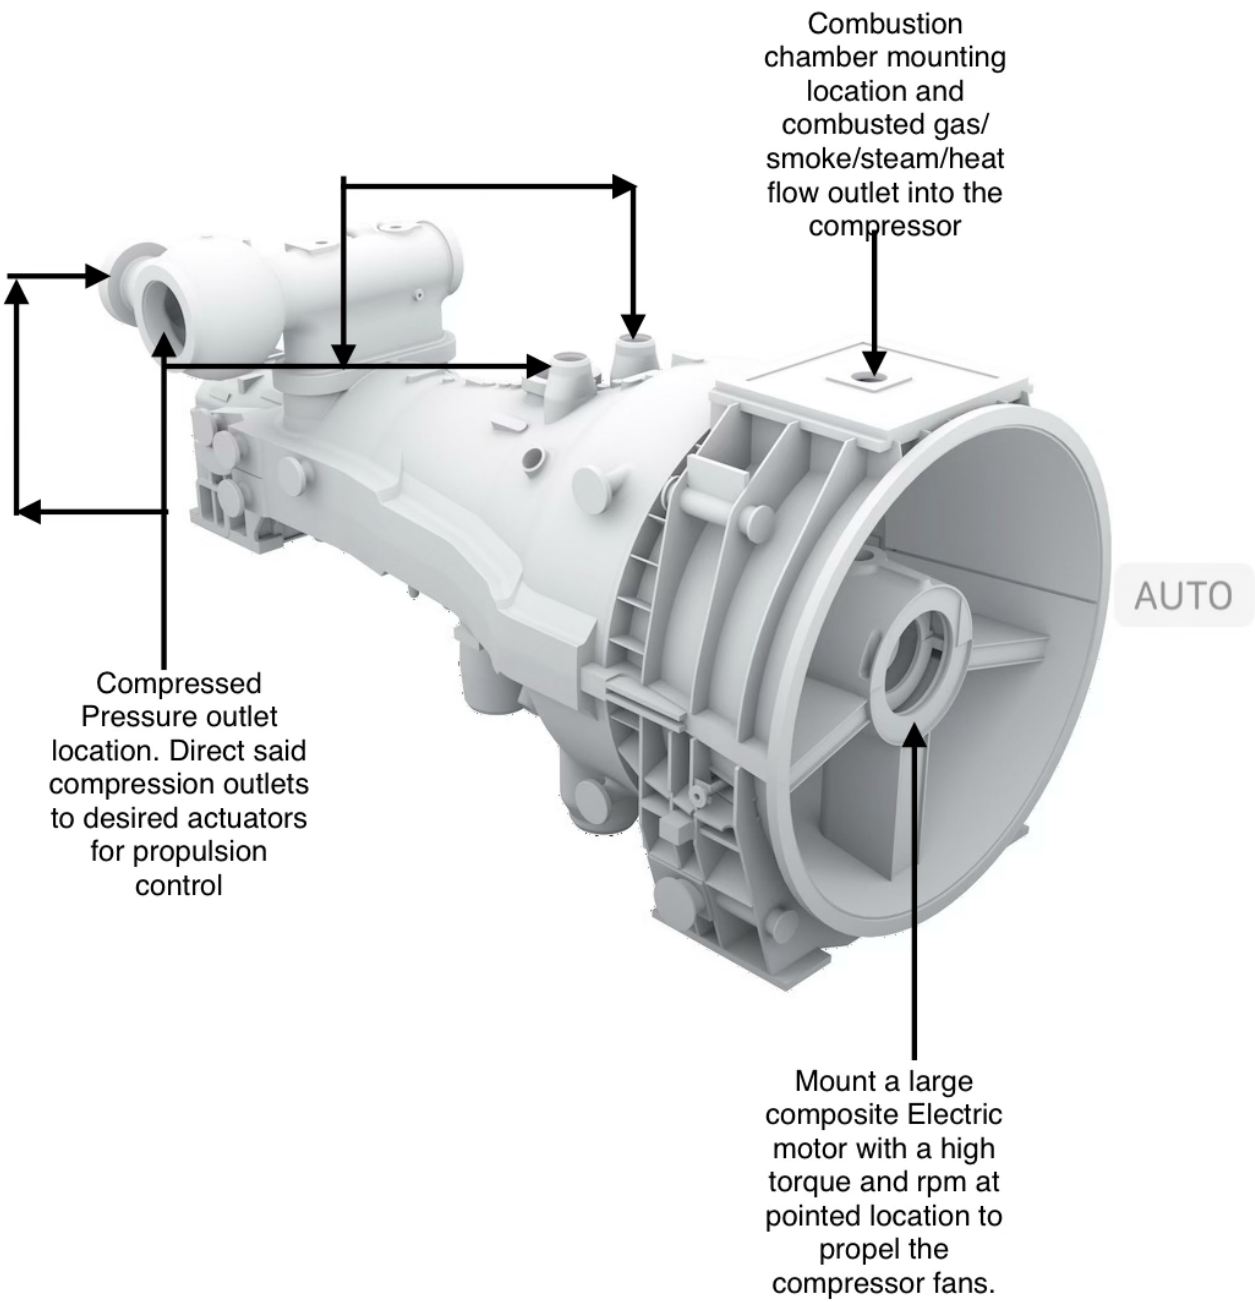

(S1.1.5) Smoke Oil



AeroShell Smoke Oil
petroleumservicecompany.com

(S1.1.6) Smoke Oil




Phillips 66 Aviation Smoke Oil

petroleumservicecompany.com

With Aviation Smoke Oil mixed with ones desired liquid fuel, such as Jet Fuel, one produces a higher output/amount of smoke in the combustion chamber which in turn increases the amount of particles to pressurised, in turn leading to a quicker refuel time for desired flight hours, as to say, with Aviation Smoke oil fuel mixture, one produces more pressure as smoke/gas particles are quite dense.

(A)

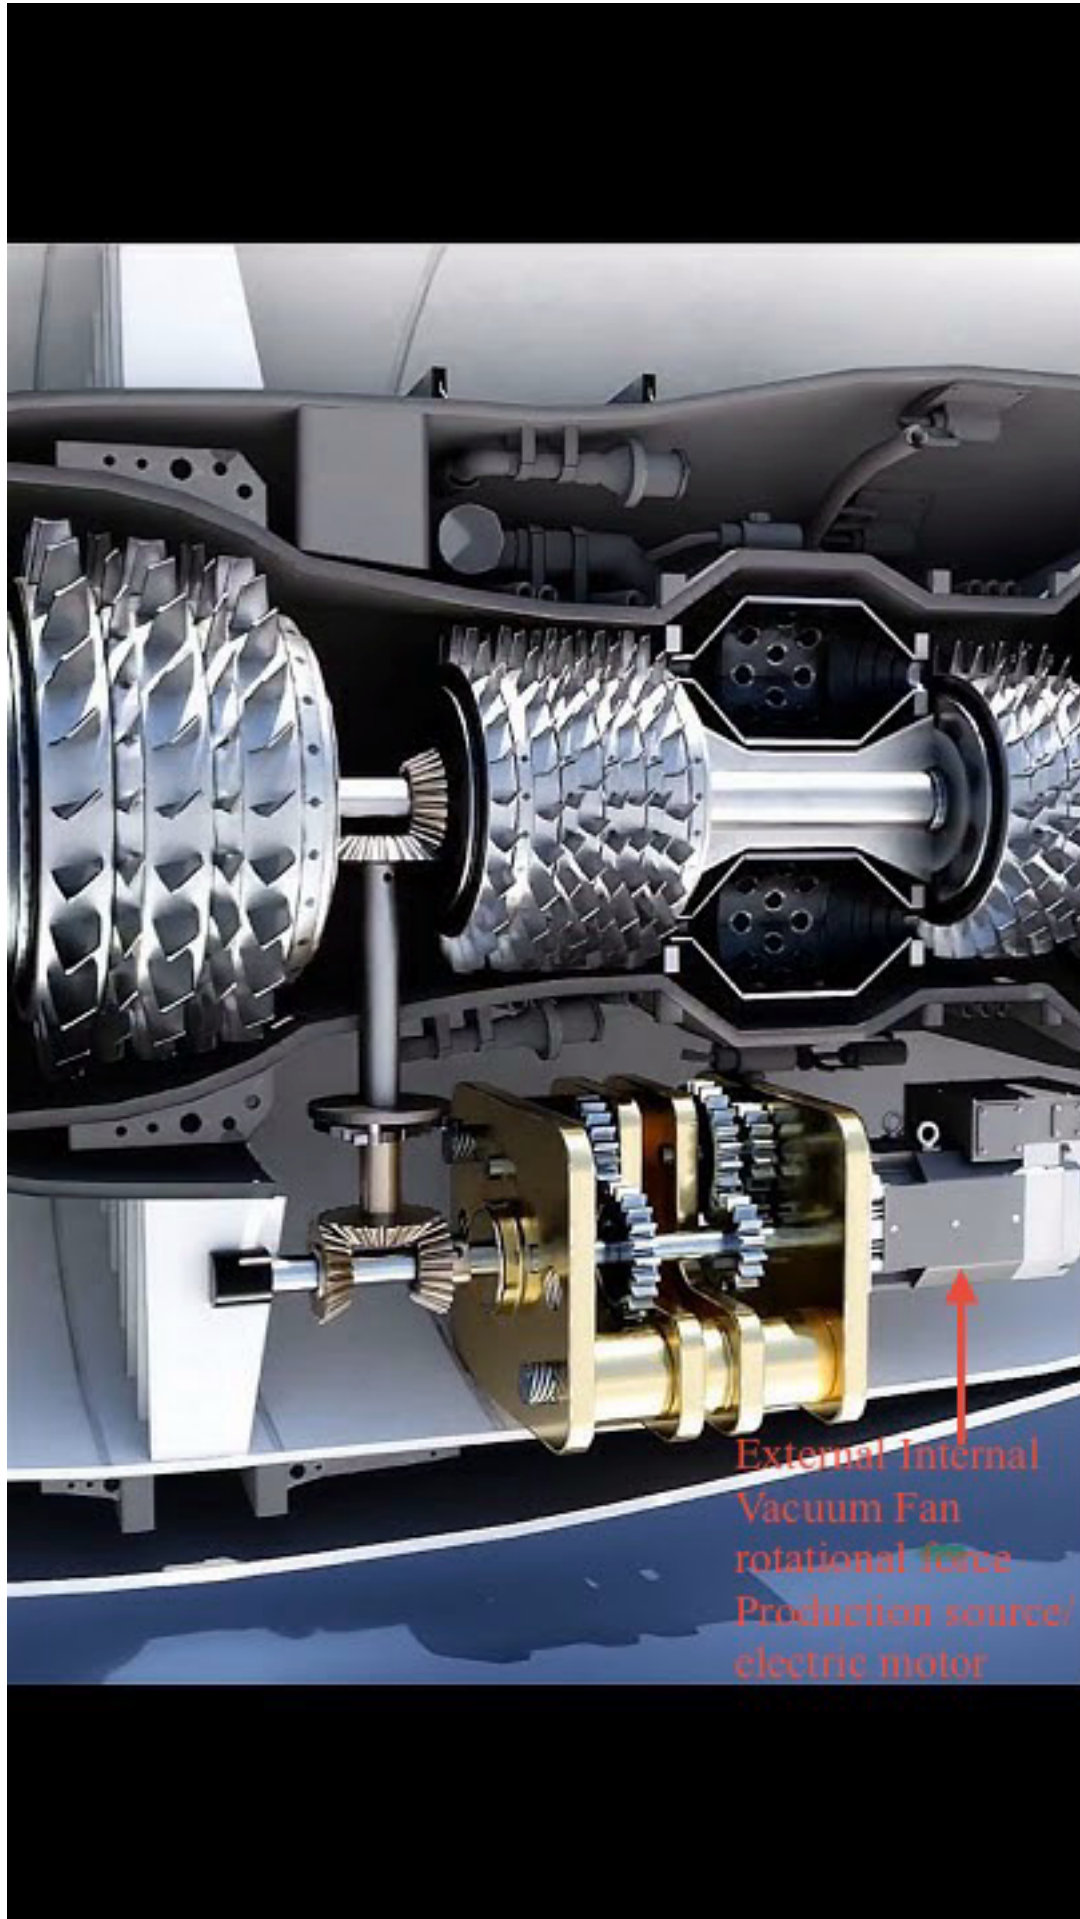


External Internal Vacuum Fan rotational force Production, fastest/highest rpm electric motor

Perhaps in a - c nitrogen environment. Reduces timeframe of pressure blow back towards and into the combustion compartment and Increased pressure production, in turn, propulsion production, at end turn, speed and fuel efficiency with a seal tight chamber with error of leakage within the internal compartment, in loss of rotational speed of in example, an electrical motor with outer frame in-housed in liquid nitrogen. Nay any external pressure leaking, zero margin of error, in reference to external leaks of pressure in gas form. In reference of fuel efficiency, an Internal Vacuum Fan rotational force, in example, several rings of suction fans which increases, better said decreases time span of fuelling time required in order for sufficient propulsion to be generated for flight, as to say, in simple terms, quicker refuelling time, faster speeds, higher physical fictional feel of torque, as to say, the force that pushes you back into your seat during acceleration, providing that "get-up-and-go" sensation from the engine, better said, vehicle. To add a further positive, and less tonnage of fuel required in general to achieve desired flight hours.

The External Internal Vacuum Fan rotational force Production is of the highest importance in a Jet engine, as A high RPM fan can hold back a significant amount of gas and heat pressure, as pressure held back is proportional to the square of the fan's speed. This means if you double the fan's speed, the pressure it withholds will increase, as to why the External Internal Vacuum Fan rotational force Production needs to be the highest rpm electric motor possible. As to say, the speed/rpm of your fan/Internal Vacuum Fan dictates the maxium amount of pressure that can be held inside of each and every pressure chamber within the compressor, in lay man terms, acquire the fastest electric motor in connection to the Internal Vacuum Fan if possible to achieve flight capable pressure.

And most importantly, add heat rods within the compression chamber/compressor to main the combusted heat pressures heat, other wise you lose the majority of the heat pressure as the combustion heat cools down over time, without the added heat rods, achieving flight capable pressure is quite difficult.

(A1.1)

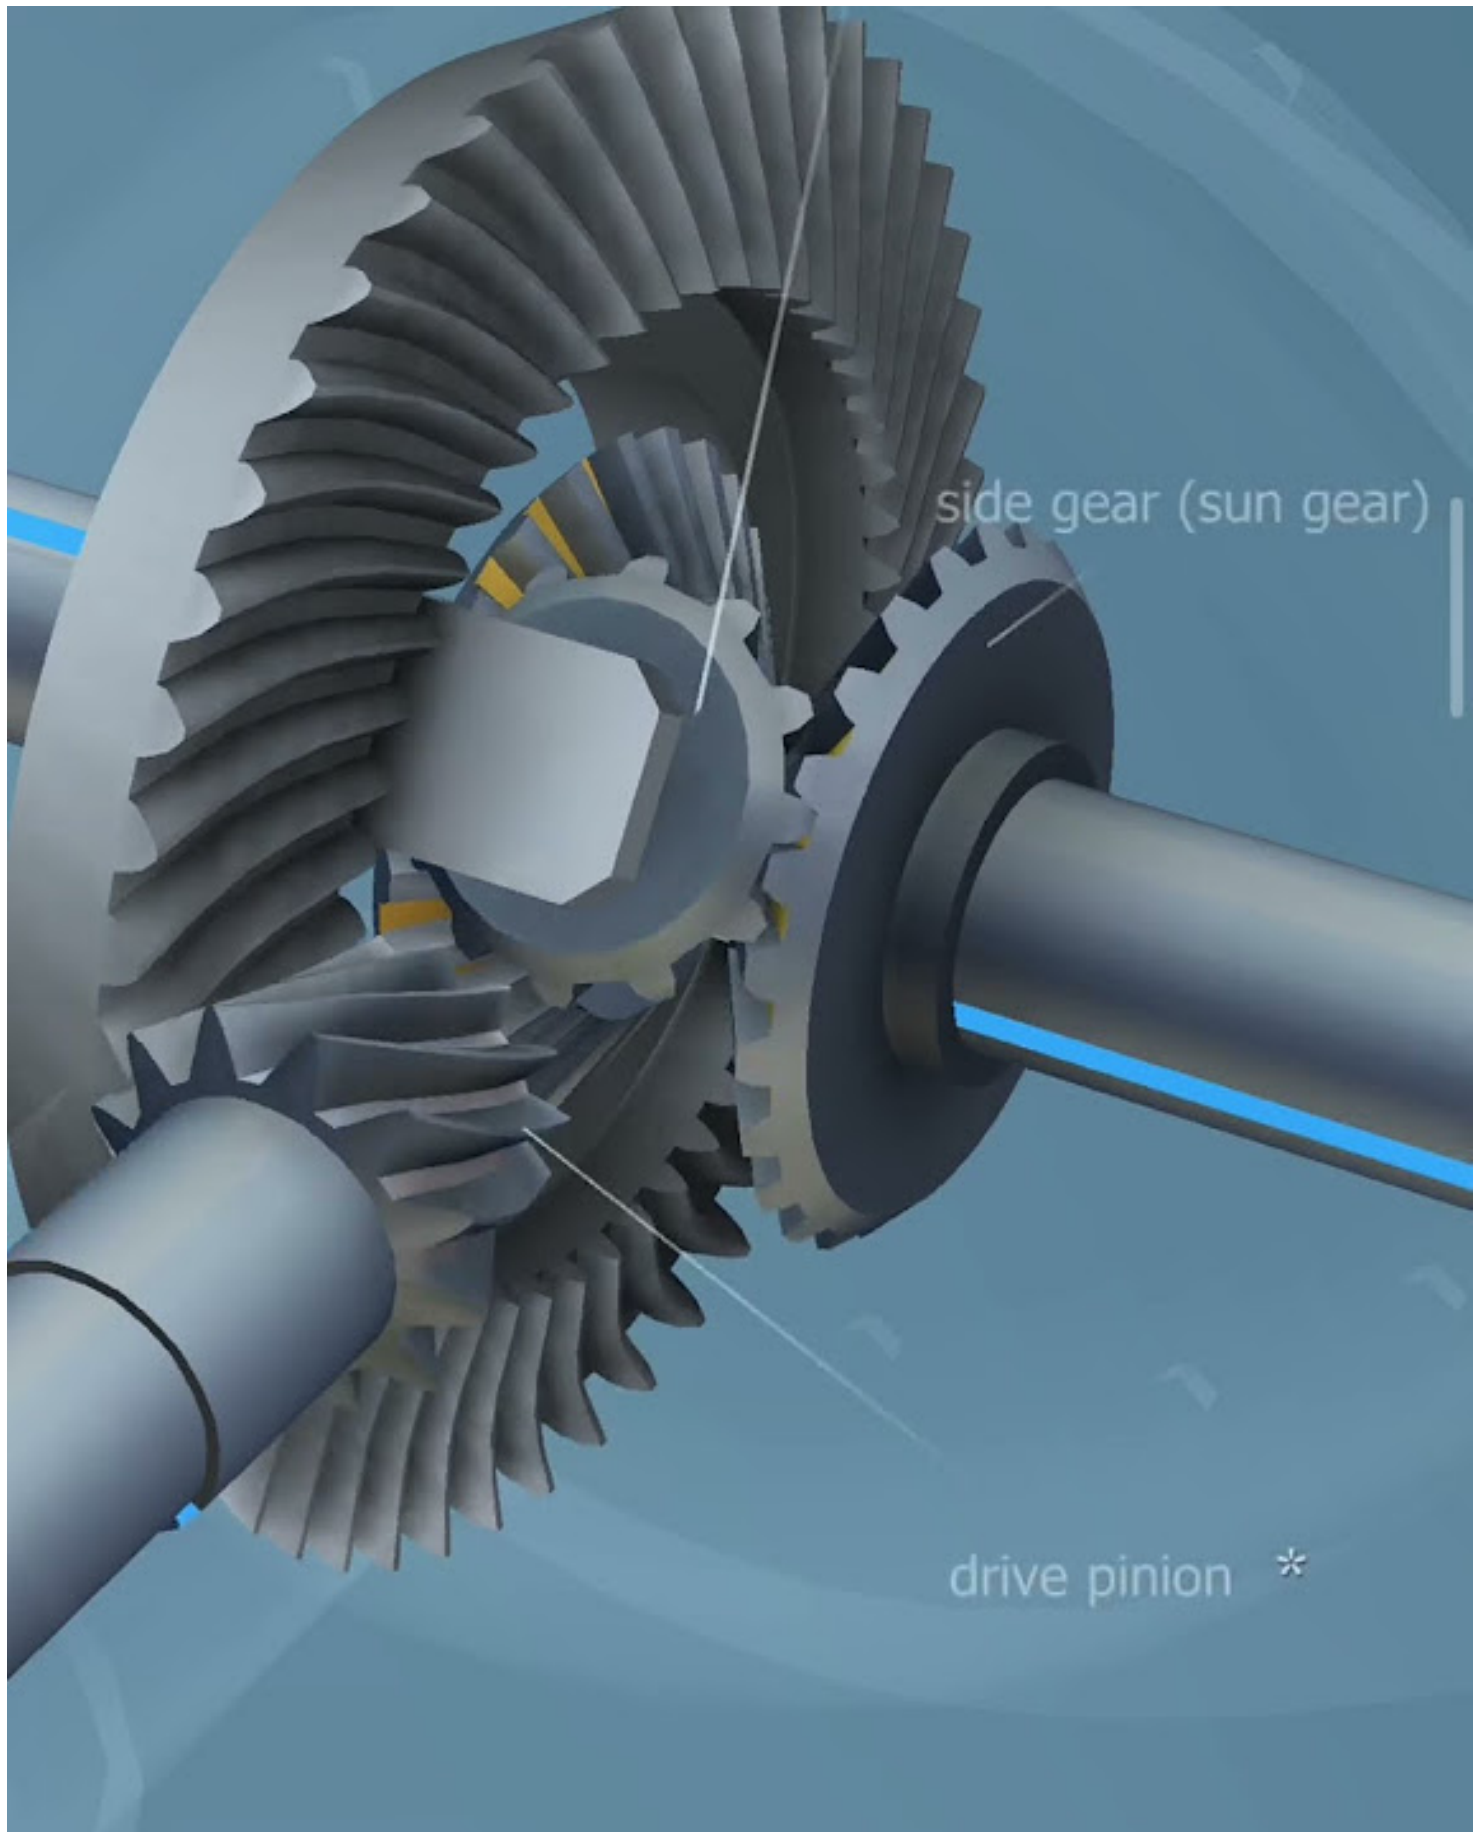

The External Internal Vacuum Fan rotational force Production can be placed in a straight line/ inlined with the central fans if the [Differential Gears](#) seen in the image above, (A1.1), posses to

complicated. I highly recommend this method, placing the electric motor and it's housing/ compartment horizontally inlined with the central rod, right at the beginning of the Jet engine, tverse across the most rear exhaust location if your vehicle has the capacity and ability for such a design. Nay destructive such a design if the nitrogen compartment is in case/inhoused in a enriched steel/iron compartment fully sealed and locked with zero error for leaks,

The destruction question is, what can physically puncture a black box, that can be found naturally on the airways and on the surface of the earth, in case of a collision/crash, as to say, an aircraft made of enriched steel/iron/titanium/tungsten hits/colides the body of its frame and suffered a puncture through heavy steal/titanium/tungsten, which are metals we know to only drill or melt/furnace smolt as punctuation is near impossible otherwise.

Any image proof of an aircraft with its frame bent, broken, is made from soft metals such as aluminium, which we don't recommend, the list of recommended metals to use on the planet Earth, are as follow, Tungsten, Titanium, compressed Steel/iron and a few more.

A differential gear can be seen above, (A1.1)

(A2)



Double Sided Sand Castings example/assumption. In combination with a Engine slide in/socket in construct. Perhaps with a pour down/molten pour welding/attachment mechanism in relevance and reference to Engine Slide in/ (Perhaps) lowered down, as to say, attachment of molten pour with ease if exhaust is inlaid inline. Straight pipe exhaust with raised pipes. Plug and play perhaps, excluding external exhaust control, in reference to function. External Exhaust control, as to say, directional control, could in assumption be in housed in the physical frame.

(A2.1)



The World's Largest 3D Printer for sand

voxeljet.com

A sand caster can be used to create a cast in sand with a molten pour hole. Can be used to create the cast example as seen in the example above, (2), and many more.

With the use of a 3D software, the sand caster can be instructed with a simple image data point and allows text commands for in-depth cast design. A simple to use 3D printing software for cast creations. Note the sand must be broken off/removed once the molten pour has cooled to desired temperature, a room temperature of 20 to 30 Celsius is recommended. To break off the sand, simply use a hammer or and water and a vacuum system to flow the dust and sand away. Can be performed by robotic arms and humanoid robots.

(A2.2)



Furnace Charging Systems

inductothermgroup.com

Conveyer Belt for filling/refilling the belt, with a simple Diesel truck load empty receiver attachment.

(A2.3) A manufacturer that can custom manufacture Furnaces and furnace related equipment.



Small-Capacity Steel Shell Furnaces

inductothermgroup.com

A larger tonnage/capacity gas driven/powered furnace.

(A2.4)



ARMS® Systems

inductothermgroup.com

A furnace pour robot is an automated system that uses robotic arms to precisely pour molten metal into molds, increasing safety and accuracy in metal casting. These robots perform tasks like loading and unloading materials, pouring, skimming slag, and cleaning furnaces, which reduces operator exposure to hazards and improves product quality.

(A2.5) Welding and buffing/filling robots manufacturer that can custom manufacture manufacturing robotic Arms and more.



**Arc welding robots | Industrial Robots by
Kawasaki Robotics**

kawasakirobotics.com

Welding and buffing/filling robots, can also pour and place pour cast, and buff off the excess once the welding pour is cool. Use - c nitrogen to achieve quicker cool down rates of molten pour.

(A2.6) Humanoid Robot Manufacturer.

Humanoid robot G1_Humanoid...

Unitree Robotics Humanoid Robot G...
unitree.com



Humanoid Robots with a LLM controls of robotic SDK, said humanoid robot can assist with hand held welding, buffing, pour welding and installation/socket in EGr valves directly into the casted frame. Same task can be performed by a robotic fixed stationary arm or in track/wheel arm or a humanoid robot.

(C) Electric Motor Manufacturer.



High-speed motors with up to 500,000 revolutions per minute

celeroton.com

A larger electric motor with a larger central rod radius is recommended in order for the Compressor chamber vacuum fans to be able to spin/generate a high RPM.

In pure copper wires/coils/motor and a titanium rod and outer casing/housing or iron/steel mixed with pure graphite, as to say, GGv/dark steel, durable steel, enriched steel/iron towards the discipline of heat resistance.

(D) Nitrogen Gas and Nitrogen Liquid providers/manufacturers.

[\[LINK\]](#)

Or



FAQ & Contact | Linde Gas Benelux

linde-gas.nl

(E) Demo Small size alternative Alternator/generator/turbine
Inquire the pure copper turbine/motor unit (100/99% Cu)



**48v60v72v Low Noise Pure Copper
Intelligent Range Extender 3-8kw
Electric Three Four Wheel Car Gasoline...**

alibaba.com

Image above can be incased in a heat resistant casing creating a smooth surface and shape with no objects seen in the image visually visible complete product. Just a nice 6 sided heat resistant enriched iron/steel box or a titanium 6 sided box.

Demo alternative generator, in visual sense, in size composited, positive, in need of larger wattage output and of pure copper coils and heat resistant outer cast/frame. In example above, (A), a powerful generator/powerplant is required in order to generate a bistandard power source if the pressure from the combustion engine is used/lead to spin/propel a powerplant/alternator/generator, if not, ignore bistandard, and a permanent power source is required. If a bistandard module is implemented, the bistandard alternator need only run/generate electricity for a certain x time, in order to spin the Internal Vacuum Fans, in turn generating compression which once used to spin /generate electricity, the bistandard alternator may and can be shut off/turned off, layed to idle.

(F)



Examples of Shutter Gate configuration for an external exhaust control, series of gates can be used in combination for more precise control of exhaust pressure and speed. Each shutter Gate, which many refer to as an EGR valve shutter gate, though physically different, however an EGR valve can perform and complete the same task as the shutter gate in this scenario. To control the shutter gate, as to say, lift and lower the physical gate part of the shutter gate, better said, the section that closes and opens a path within the exhaust pipe/outlet, back to subject, to lower said section, an example could be a series of pulleys and a string mechanism in connection to said pulleys with electric motors at the end of the pulleys loop, the motors spin the gate open and close fully or partially. The motors spin speed, as to say Rpm, is an essential element, the faster/higher the rpm, the better. The motors can also be housed in a -c nitrogen environment and the motors outer case/housing should be built of enriched steel/iron such as dark steel with heat resistance discipline focus or titanium.

(F1.1)EGR Valve



EGr valve in Titanium or Enriched Steel/iron in the discipline of heat resistance, in example a

graphite and metal ore smolten pour mixture, also referred as GGV. Recommend EGr Valves with the central rod having electric motors on both ends of the central rod, one spinning/rotating clock wise, and the other rotating/spinning anticlockwise. Electric Motors with high "torque/ RPM", in order to withstand pressure spinning the EGr central rod.

(F1.2) Actuator, Request a AUMA SEVEN ECOTRON actuator in GGV (Second Reference)
Inquire the pure copper motor unit (100/99% Cu)



Or

**Auma Variable Speed Actuator
Seven (ECOTRON) at best pric...**
indiamart.com




A gas/steam/smoke/heat/Pressure valve actuator is designed to control the opening and closing of valves in gas systems. It automates the valve operation process, ensuring precise control over gas flow.

.

(G)

Compressor

Combustor

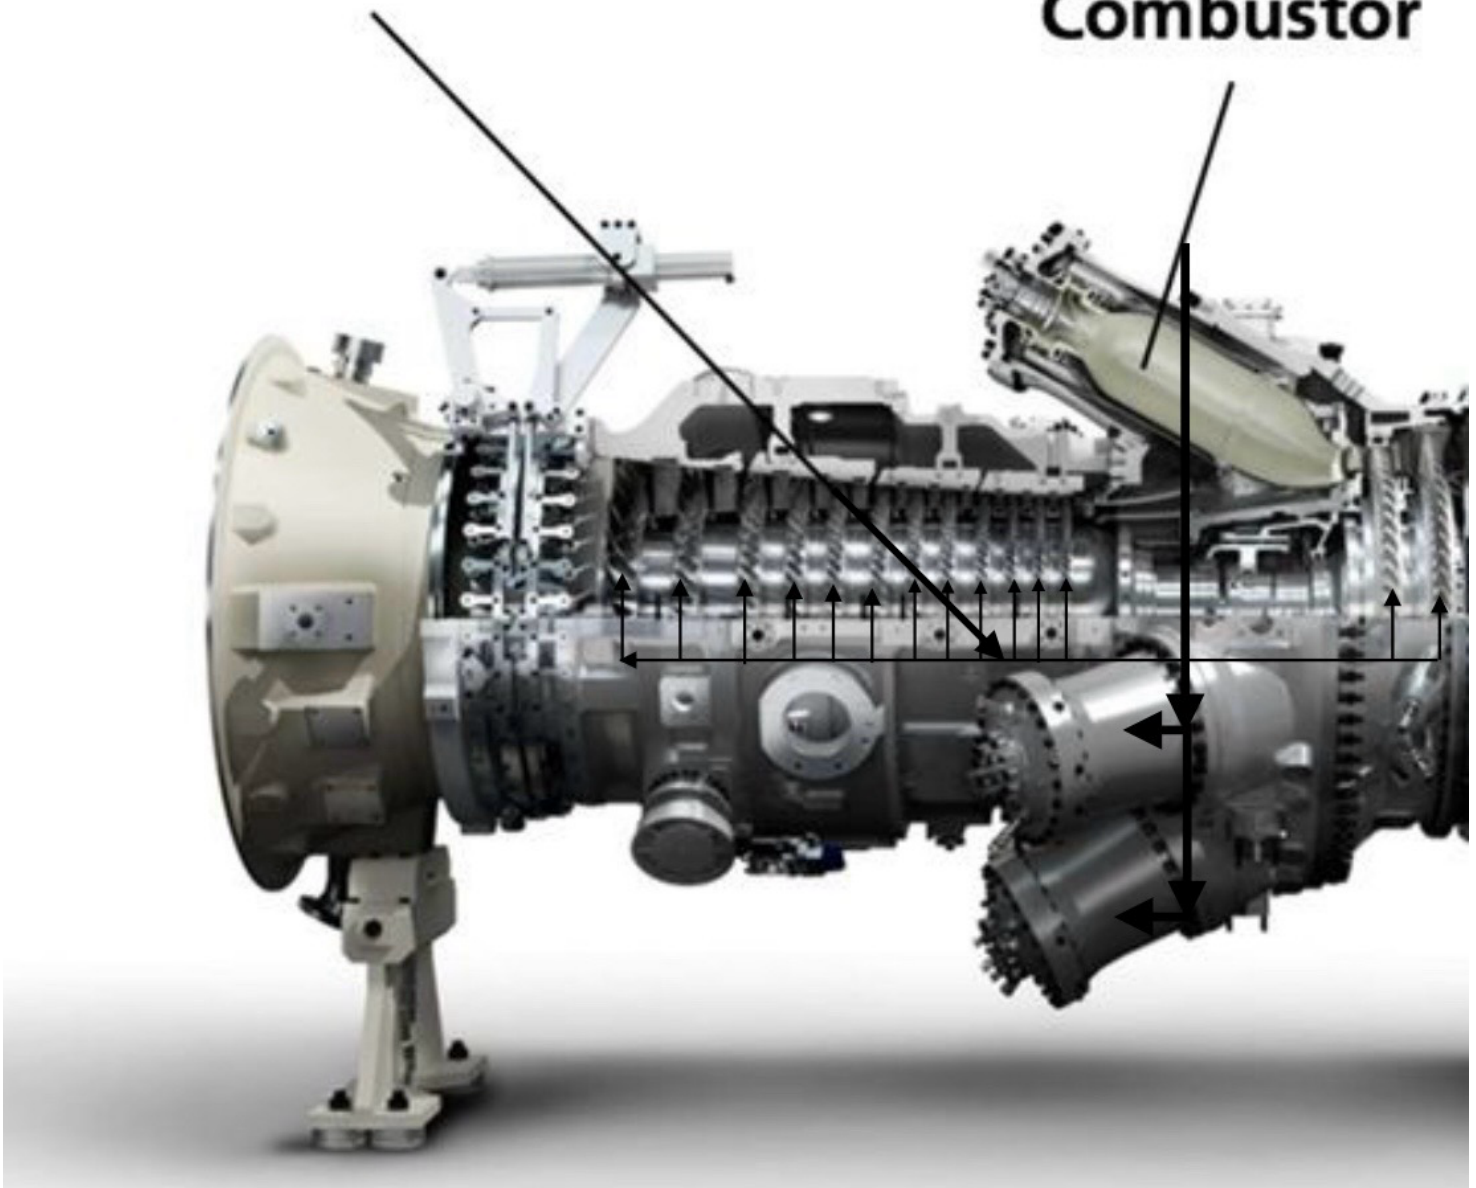


Example of a Combustion Chamber referred in the example image above as Combustor in connection to a jet engine compressor. As seen above, The engine in reference uses a uplifted tube/tank combustion chamber module, in reference, named Combustor. Perhaps a series of combustion chambers if we assume the other two chambers seen in the example above too are combustion chambers. Having a series of combustion chambers is a huge positive as this increases gas/smoke/heat production and longevity of said gas/smoke/heat production in scenarios of a pressure blow back. As a series of combustion chambers increases the time span of combustion chamber disruption due to the blow back of pressure making ignition of fuels important. As to say, the maximum amount of pressure the system can withstand/withhold, as to say, we're done fueling/ igniting fuel for

pressure production via compression of combustion gas.

(G1)

Compressor, as seen in the example above, (G) referred as compressor in the image example (G), though visually, the example image, (G), visually shows the exterior of the compressor, we still get a good idea of compressor example shape and size externally. Note the compressor contains several chambers and the only pressure/gas/smoke entrance to said chambers is only through the tiniest drill bit hole possible, note that a External Internal Vacuum Fan, as mentioned above, (A) , can be placed precisely behind said tiniest drill bit hole for shorten time frame of desired pressure Production.

(G0) Rear Turbine configuration.

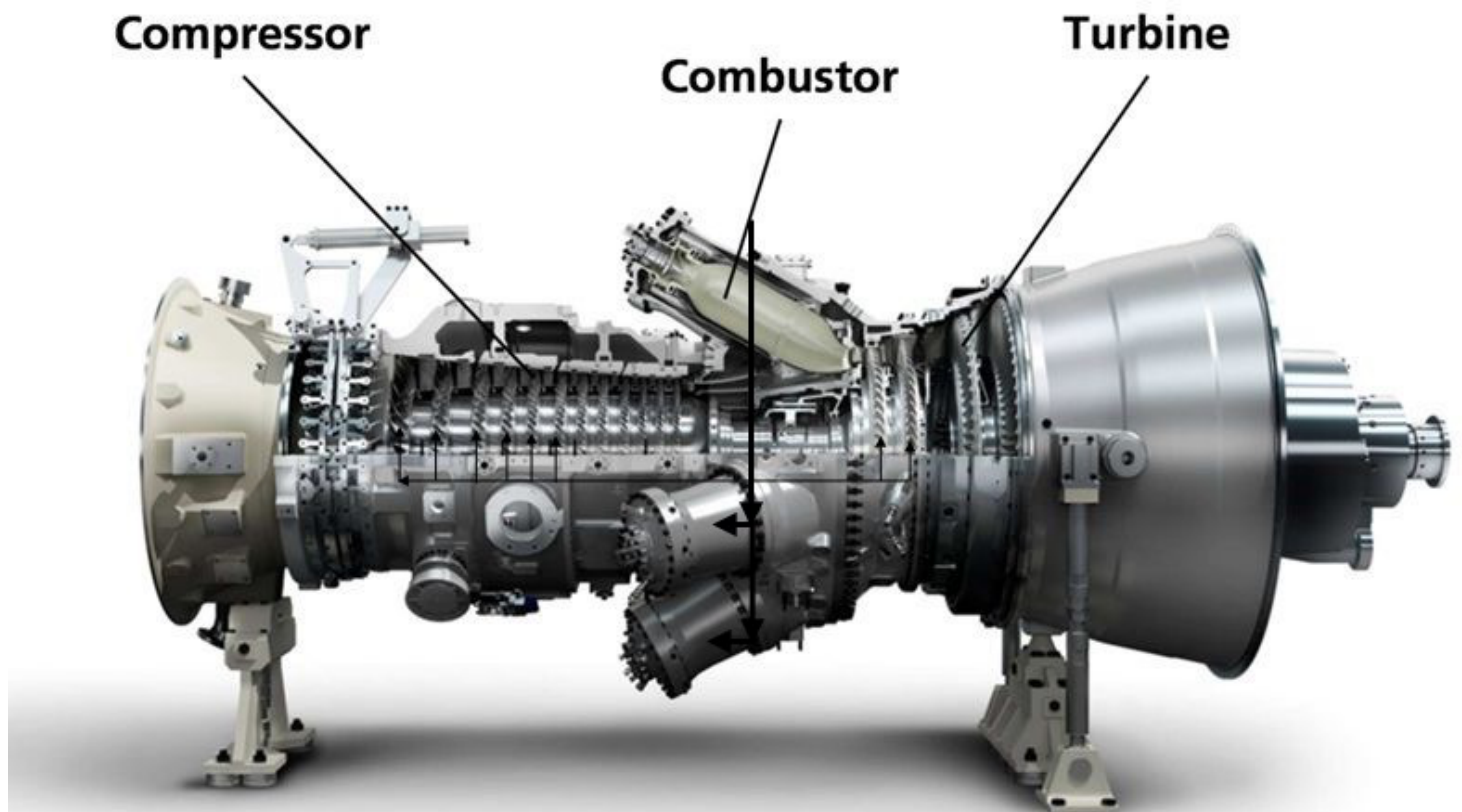

Rear Turbine configuration as seen in the example above, (G0), has the traits of a quicker blow back timeframe due to the turbine compression section being unable to hold and maintain large quantities/portion pressure before its fully pressurised and filled. To resolve the issue of the rear mounted turbine causing a quicker blow back, simply remove the turbine from the control pressure loop, as to say, place the turbines pressure inlet a different location along the pressure line, best at the most furthest point from the combustion chambers, at the point of highest built pressure is recommend, however, this leads to a longer time frame before the turbines starts spinning and generating electricity, however, this is easy to bistan with a bistan external jet fuel powered generator/alternator that should shut off once the pressure chambers are fully

pressurised and the rear mounted turbine is spinning and electricity is being outputted by the rear mounted turbine. Once the turbine is producing electricity, the electric production point can now be sourced away from the external alternator to the internal rear mounted turbine.

The external alternator/generator can be placed internally, acting as a small format bistand turbine, as a alternator/generator is a turbine in itself. The jet fuel inlet/pipe/path to the combustion section of the engine can be attached together with the small format bistand liquid fuel driven/powered generator/alternator, (E).

The heat/pressure/smoke generated from the jet fuel driven/powered internal external generator/alternator can be directed into the main jet/rocket engine compressor chamber, in turn, no pressure of propulsion per litter of jet fuel consumed in overall total is lost, as to say, the internal external alternator/generator is quite efficient.

However, A turbine configuration jet engine removes the further need for a inbuilt or external self contained alternative generator, as refered in example (E) above. However, a first life time startup power source could be needed or a longer first life time pressure built up is needed.

In the image example above, (G0), the Internal Vacuum Fan rotational force is produced by the turbines electrical output/Production.

What does the turbine do, it produces the electricity needed power the Egr valve or classical shutter gate electric motors, and the Internal Vacuum Fan electric motor, and "electric device".

In regards to faulty electric motors, a pure copper composit electric motor resolves the issue, as for a motor to fail, the electric flow flowing trough the cables/wires/coils must be breached/cut. Impurities in the copper coils could cause a breach, as why a pure copper composit electric motor resolves the issue of "faulty electric motors".

In regards to faulty electric motors due to melted coils/wires/cables, a -c nitrogen motor housing, or a GGV vermicular graphite/graphite enriched iron/steel, (J), electric motor housing/shell/casing resolves the issue of "Melted electric motors".

(H)

Inquire the pure copper spark mechanism unit (100/99% Cu)



Autolite Iridium Ultra Iridium Spark Plug AI5363

autozone.com

Spark plugs ignite the air-fuel mixture in a engine's combustion chamber, creating a spark that forces the fuel to ignite and generating heat/steam gas/smoke/pressure. They are essential for an engine to start, run smoothly, and operate efficiently, however, there are other methods than spark plugs, such as a bare fire source.

Material: Iridium

(i)



0445110369 Diesel Fuel Injector
0445110368 03L 130 277 J New 03L 130
277J 03L130277J 0986435166 .Comp...
amazon.ie

Or


[[LINK](#)] A Manufacturer able to custom order in alloy and configuration requirements.



In assumption, in reference above, a graphite steel mixture/enriched steel/GGv fuel injection/sprinkler. Place in a gas furnace to test it's melting point, just to be sure before installation.

Material: "high-speed steel", a term used to refer to enriched steel in the discipline of heat resistance, also known as GGv.

(J) GGv Engine block(Top holes and all holes seen in the image are configurable to desired use)

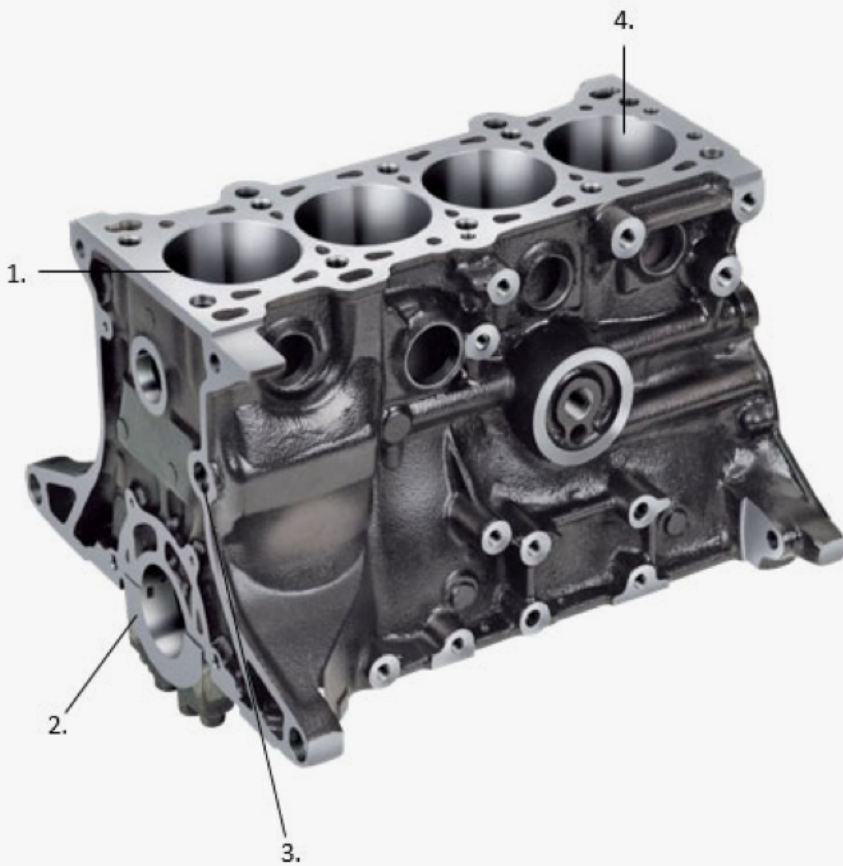

Engines


alcatools.co.uk

A GGV vermicular graphite/graphite enriched iron/steel cast Engine block with a oxygen injection possibility, can be used as a example combustion chamber. A pure combustion block is recommended, especially in a enriched metallurgical composition. Engineblocks can be placed/locked in a iron/steel box for visual appeal and increased pressure sealing.

A pure combustion block with Fuel injection, (i), holes/manifold/socket in slot/slide in socket/Bolt on point. A fuel injection device as seen in image example, (i), must be able to socket in the engine block with ease. As the same with Spark plugs, (H), the engine block must have holes/manifold/socket in slot/slide in socket/Bolt on point, for spark plugs as seen in image example, (H). The engine block must have holes/manifold/socket in slot/slide in socket/Bolt on point for oxygen/air.


The more holes for spark plugs and fuel injectors and oxygen the better, that means a longer/larger engine block, which is positive, as this gives us a quicker re fuelling time frame, as the more ignitions the engine performs, the more pressure the engine produces, a long engine block is recommended, with a long row or rows of fuel injectors/sprinklers and spark plugs/lighter/ignitor and fresh air/oxygen intake.

()Liquid Pump. It can be manufactured in different configurations, in example, a GGv housing/ Covering/box for visual appeal.[\[LINK\]](#)
Inquire the pure copper unit (100/99% Cu)

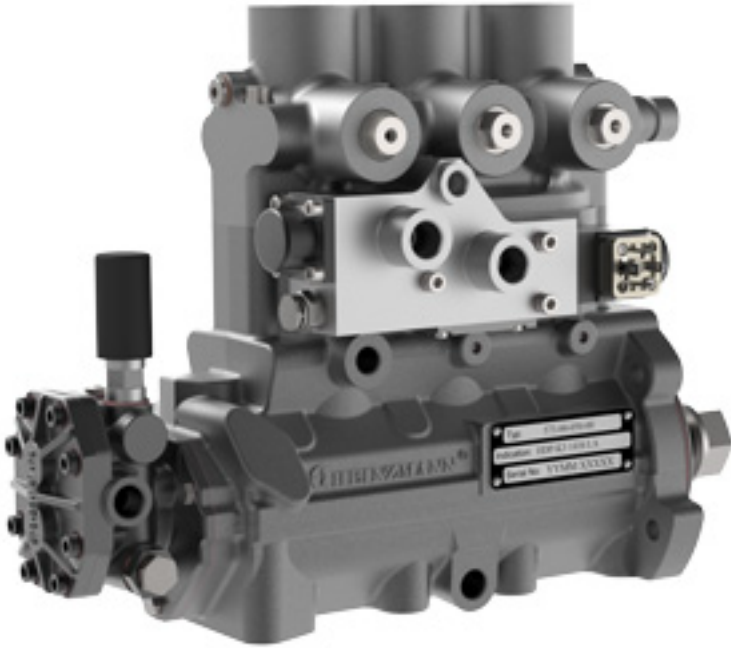

Example of A Fuel Pump with a fuel filter attachment for fueling/feeding the fuel injectors fuel, and also a custom amounts of points/locations/sections for liquid intake and outake, as to say, a larger pump with more fuel output lines, and perhaps one large fuel in take line, in example.

() Pressure Valve/Pressure Needle. It can be manufactured in different configurations, in example, the side Pressure Exhaust Point/Pressure outlet on the side can be removed for a straight through valve. [\[LINK\]](#)

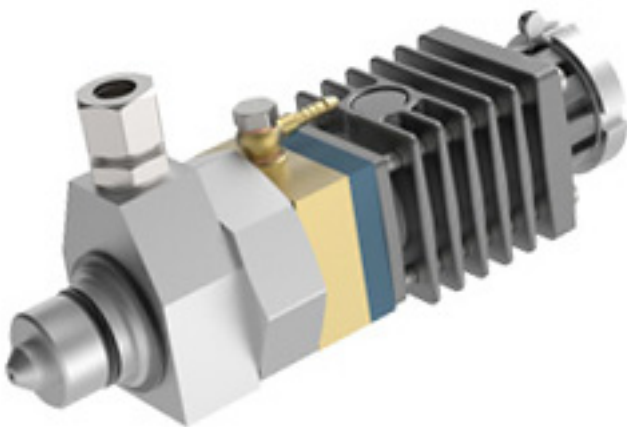

Example of A Pressure Needle/Pressure Valve, if a straight out hole can't be placed in cast, or drilled in the compressor section dividing part/barrier/Panel wall in the middle of the compressor chamber that splits the chambers in sectiona with a turbine fan precisely behind said hole, in continuation, if said hole can't be drilled, a needle/Pressure Valve such as you see above, , can

be used. The Pressure needle/Pressure valve can be constructed in GGv alloy.

Pressure Needles/Pressure Valves can also be used as a pressure controller, for pressure directional flow control with the side exhaust hole on the frame of the needle, in example, leading pressure to a turbine, and even to pressure outlets/exhaust points.

To attach/mount/install a Pressure Needle/Pressure valve, use a compression chamber with pre casted socket in holes, or drilled in holes in the section dividers within the compressor chamber. And install vacuum air pumps precisely behind the pressure needle/hole, vacuum pumps with the fastest/highest rpm.


For an increased pressure buildup and increased en turn propulsion, attach a EGR Valve precisely behind or in front of the Pressure needle/pressure valve/pressure entrances of each and every compressor chamber, and electrically program each EGR Valve to be fully closed until each individual chamber is fully filled and compressed, and then proceed to open the EGR Valve allowing pressure into the next chamber, and proceed with the same pattern until the last chamber. As each individual chamber behind is fully compressed of pressure, and pushing forward, a blow back is quite difficult to happen.

For in further pressure buildup up and pressure control, proceed with programming the EGR Valves in the compression chamber to close behind once the next chamber is compressed and reopen once the chamber behind is re compressed. This allows for smooth pressure control and once you've reached ample compression pressure, open all the EGR Valves within the compression chamber for a smooth free flow of heavy pressure from the rear to the most forward compression chamber, and please note and remember that every compression chamber is super tiny in size and diameter for quick pressure build up. As seen in the example image (G0), with each compression chamber having a visual divider looking like fins.

Please note that, to successfully create enough pressure to create lift, an electric motor of hundreds of thousands of rpms is required to act as the External Internal Vacuum Fan rotational force Production. And your aircraft must be as light as poetically said, "light as feathers".

() Liquid/fuel Injection Controller. [\[LINK\]](#)

A manufacturer that can custom manufacture, in example, a GGv alloy controller that is fully mechanical using simple volt control for injection/sprinkle/combustion intervals. Can be placed/welded physically onto the combustion engine block with the injectors/sprinklers mounted, with ease of access.

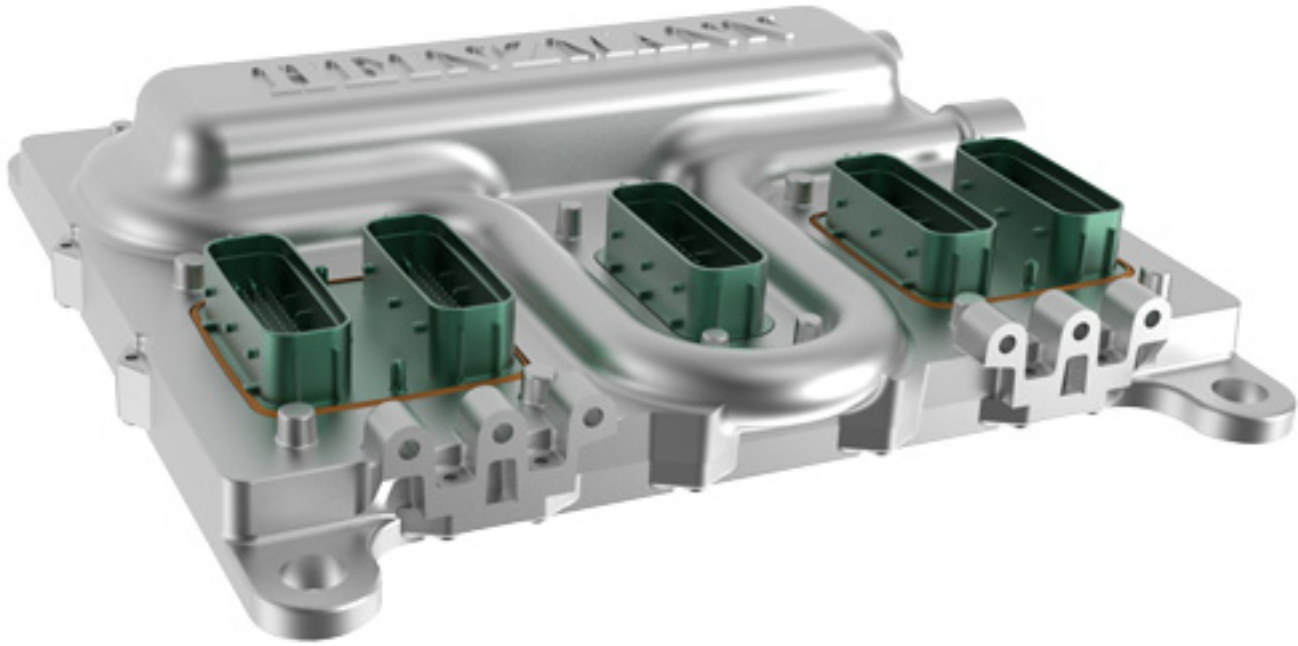

For each spark plug, one spray/sprinkle every second, a low rate, however guarantees the flame won't die, making sure/guarantees that the spark plug/igniter can spark /ignite and set a flame fuel with success. The sprinkle rate can be reduced with 50%, to 30 milli seconds between each sprinkle/spray/injection, still a slow rate, however, for highest rate of ignition per sprinkle/spray/injection of fuel.

The quantities of fuel per sprinkle/spray/injection is set at a rate per sparkplug/ignitor at 10 milli liter for highest ignition rate. The quantities of fuel to spray per circle of injection can be reduced with 50%, to 5 milli liter per sprinkle/injection per spark plug/igniter spot/location/socket/Manifold increasing the ignition rate.

The larger the amount of fuel the engine can ignite per second, the better the engine in terms of time span of pressure production, in turn the quicker the refuel time.

The larger the amount of fuel injected/sprayed/sprinkled onto the igniter/spark plugs, the higher the risk of the flame burning out/dying/blowing out, as to say, must sprinkle a small amount of fuel at a time, however, on a sweet spot it's called. 10 milli liter of liquid fuel every 30 milli seconds is recommended per individual ignition spot/spark plug.

Ignition calculation simplified: 100 injectors and spark plugs per engine block, 10 milli liter per injection per individual injector. 60 liters fuel combustion per minute.

Can be increased with more engine blocks, four engine blocks is recommended for quick refuelling/pressure compression time frame. An Average public street gas station fuel pump output rate is 40 liters per minute. With the above ignition calculation, no fuel tank is required on the aircraft.

() Hydrogen/Water Engine Block

If jet fuel is difficult to source, a hydrogen/water driven aircraft can be produced with ease, simply by making a small modification to the combustion chamber only. By removing the spark plugs from the engine block, and sealing the spark plug socket holes, maintaining the liquid injectors. Within the engine block, place a hydrogen core/liquid lava in a open roof or closed roof graphite housing/cup/container for lava, it's recommended the engine block can resist the heat of lava, use a GGV engine block. Simply replace jet fuel with water, and sprinkle water into/onto the lava, which in turn produces steam/smoke/gas/pressure, which in turn is led into the Pressure compressor as with the jet fuel engine block, however, the lava in a graphite cup, in a GGV engine block can produce enough pressure/compressed steam to fly a craft simply from water/hydrogen. The hydrogen driven craft can simply float on the ocean and engage re fueling, enabling hydrogen power for insane range and ease of fuel, in this case ocean water or a water hose/pipe from any water source.

A decent fuel filter and even a fuel debris grinder will be required and placed in connection with the liquid injectors fuel pump. A easy hydrogen core replacement design is helpful in the long term, a simple turn off aircraft, chain down aircraft, empty built up pressure, unscrew/unsocket/unbolt/grind cut away a combustion chamber containing a hydrogen core/lava in a graphite cylinder/container and replace with a new one.

Wheel sensor, if a wheel sensor is installed, one that monitors a electrical flow connection when the wheels/landing gear/floor grappling points are aligned/engaged/On the floor, in turn, joystick controls has a dynamic system that limits openings of the EGr valves/external exhaust outlets/external Pressure outlets. syntax example,

Electric pulse to true value

if electric pulse

 wheel sensor = true

if wheel sensors = true

 Grounded Joystick Profile = true

As to say, Pressure external outlet/EGr valves/shutter gates are disabled, as to say, propulsion

control/outlet is turned off when the aircraft is on the floor/ground.

In combination of a wheel speed sensor,

if spin at x interval (A wheel spinning sensor sends a electric pule to a switch, the switch in turn sends a digital pulse that gives a syntax true or false value. As to say, a switch that can communicate with a Ecu/computer/mini pc via a simple plug and play connection).

if wheel sensor spin x interval
wheel speed sensor = true

if wheel speed sensor true
Grounded Joystick Profile = false

As to say, Pressure external outlet/EGr valves/shutter gates are activated, as to say, propulsion control/outlet is turned on when the aircraft is moving at a certain speed on the floor/ground.

VTOL configuration/Vertical Take Off

If VTOL configuration true
Grounded Joystick Profile = false
VTOL Profile = true

As to say, Pressure external outlet/EGr valves/shutter gates are activated, as to say, propulsion control/outlet is turned on when the aircraft is at a standstill on the floor/ground with a certain profile for vertical take off, as to say/meaning, the aircraft can perform a vertical take off, as in said VTOL Profile, the EGr vales are set at a certain configuration.

Classical Thrust configuration

if Classical Thrust configuration profile true
Grounded Joystick Profile = false
Maximum Rear Bearing Acceleration Profile = true

As to say, Pressure external outlet/EGr valves/shutter gates are activated, as to say, propulsion control/outlet is turned on when the aircraft is at a standstill on the floor/ground with a certain profile for maximum rear thrust/propulsion/pressure outlet/realease, as to say/meaning, the aircraft can perform a rocket forward horizontal rolling take off, as in said VTOL Profile, in Classical Thrust configuration profile the EGr vales are set at a certain configuration.

Belly Roll/Half Roll and Aggressive Profile.

If

In said profile, a tilt left or right of the joystick leads to the craft performing a sides ways roll, with the EGr valves below/facing downwards opening a x outlet rate to lift.

(For ECU/Flight testing, Aircraft will be chained down for safety purposes. Chained down via a dugged hole/pit deep to water depth (if possible), with a titanium pole, held down with weight/dried cement, with layers of steel layers poled to the hole/putwalls for extra hold down dynamic. As to say, in grave a titanium pole or equivalent down the ground, and with liquid tones of cement, fill the hole/pit in order to hold the pole down and standing straight up and tall. And finally a titanium chain or equivalent is attached to said pole via welding/molten pour weld to desired aircraft for testing. Extra long chain).

() Fuelling Sensor

MASTERCAN
vehicle CAN bus analyser and simulator



Automatic J1939/71
parsing and imitation
of CAN J1939



**MasterCAN Tool - vehicle CAN bus
analyser / simulator**

jv-technoton.com



Industrial flow meter

jv-technoton.com

Fuel flow sensor in a modular housing that can be physically lifted from the craft's frame with a row of fuel filters physically attached in connection of the fuel flow sensor.

If ignition button = false

Fuel pump relay = off

Fuel injector pump/injectors relay = off

Spark plugs relay = off

If liquid fuel flow meter sensor = true and Ignition button = true

Fuel pump relay = on

Fuel injector pump/injectors relay = on

Spark plugs relay = on

If liquid fuel flow meter sensor = false

Fuel pump relay = off

Fuel injector pump/injectors relay = off

Spark plugs relay = off

**DISA offers a full range of
moulding machines & foundry...**

disagroup.com



**🔍 sand caster software image
to cast**

google.com



Overview review list



AVA F/A-18 Super Hornet Flightstick

support.thrustmaster.com

(Splice high voltage cable, in example Split one electric motor power wire/cable and plugin/ socket into into several different channels on the relay board/switch, the more turned On channels = more electrical flow through/power. As to say, one single switch as seen below, with all inputs/sockets plugged in for a single 1kw electric motor.

(!A electric steam turbine can be constructed with a reheat/re circulation of pressure mechanism that Places the pressure usage of the turbine within a loop. Creating a continuous electricity generator, perhaps needs a top up once in a while. Top up can be used took from the pressure compressor once in a while with a actuator back flow stop. As to say, during craft fuel refill and pressure compression, lead x amount of pressure into the turbine section/pre compressor for x time, the close the inlet to said turbine after x time, top up).

(The power is always on after first fuelling) (!A further actuator can be placed precisely behind the turbines main spinning compartment, last minute point, in order to turn off the turbine within a click of a button) (Manual kill power)

() [USB Controlled Relay Switch 4-Channel 30-Amp SPST Relays](#)

If lithium fuse mechanism, Inquire the pure lithium unit (100/99% Li)

Else, Inquire the pure copper unit (100/99% Cu)

usb controlled relay switch

SEO: META DESCRIPTION

relaypros.com



() Electric Motors (Second sample)

Inquire the pure copper unit (100/99% Cu)

High-Performance 48V Brushl...

Explore our 48V BLDC motors for eff...

pmsgenerators.com



Landing Gear Forward and Reverse electric motor control.

With high torque motors and complete 100% pure copper coils within said motors, roll back of motors due to landing/landing speed is nill.

Two Electric Motors attached on opposite ends of one and the same central rod with a wheel/tire on said central rod. One motor spinning clockwise/forward and the other anticlockwise/reverse.

if speed = 0kmh

Reverse Electric Motor = off

else Reverse button = true.

If Reverse/break pedal = true

Reverse Electric Motor = on.

If gas/throttle pedal = true

Forward spinning electric Motor = on.

Ground speed control/A dynamic ground wheel throttle:

if gas pedal down with x percent

x amount of individual independent Forward relay = on

If gas pedal released at x rate/percent

x amount of individual independent Forward relay = off.

If gas pedal released Completely

all individual independent Forward relay = off.

if break pedal down with x percent

x amount of individual independent reverse relay = on

If break pedal released at x rate/percent

x amount of individual independent reverse relay = off.

If break pedal released Completely

all individual independent reverse relay = off.

Electric Motor Parking Brake/Park

If speed = 0 km/h .

all individual independent Forward relay = on

all individual independent reverse relay = on

Landing gear with shock assist releaser/landing gear

Two Electric Motors attached on opposite ends of one and the same central rod with a T section going downwards attached to the physical middle of said central rod.

If landing gear button = true

all individual independent landinggeardown relay = on

all individual independent landinggearupp relay = off

(Add delay for bay operations with x delay time)

If landing gear button = false

all individual independent landinggeardown relay = off

all individual independent landinggearupp relay = on

(Add delay for bay operations with x delay time)

Ground wheel steering

Two Electric Motors attached in house together, one with a hollow central rod housing the

Second electric motors central rod, as to say, two individual motors with central rods, one motors rod is socketed/placed in a hollow central rod attached to the second electric motor. One spinning clock wise, the other spinning anti clockwise.

Attached and the top of the T section of the above mentioned rod which are attached on the same ends of one and the same central rod with a T section going downwards, and to say, on the central point of the T section and the top of the T section, the above is attached making the straight central rod that is holding the wheel housing.

If steering wheel/joystick x direction at x percentage
x amount individual independent xdirectiongroundwheelsteering relay = on
all individual independent xdirectiongroundwheelsteering relay = off

Landing gear bay gate/door/latch

Two Electric Motors attached on opposite ends of one and the same central rod with a door panel/body frame/latch panel physically attached to the central rod.

If landing gear button = true
all individual independent landinggearbaydown relay = on
all individual independent landinggearbayup relay = off

If landing gear button = false
all individual independent landinggearbayuppp relay = on
all individual independent landinggearbaydown relay = off

If wheel weight sensor = true
all individual independent landinggearbaydown relay = on
all individual independent landinggearbayup relay = off


Cock pit glass close and open

Two Electric Motors attached on opposite ends of one and the same central rod with the cock pit glass metal frame attached to said central rod.

If hatch button = true
all individual independent hatchclose relay = on (at x percentage/speed)
all individual independent hatchopen relay = off

If hatch button = false
all individual independent hatchclose relay = off

all individual independent hatchopen relay = on (at x percentage/speed)

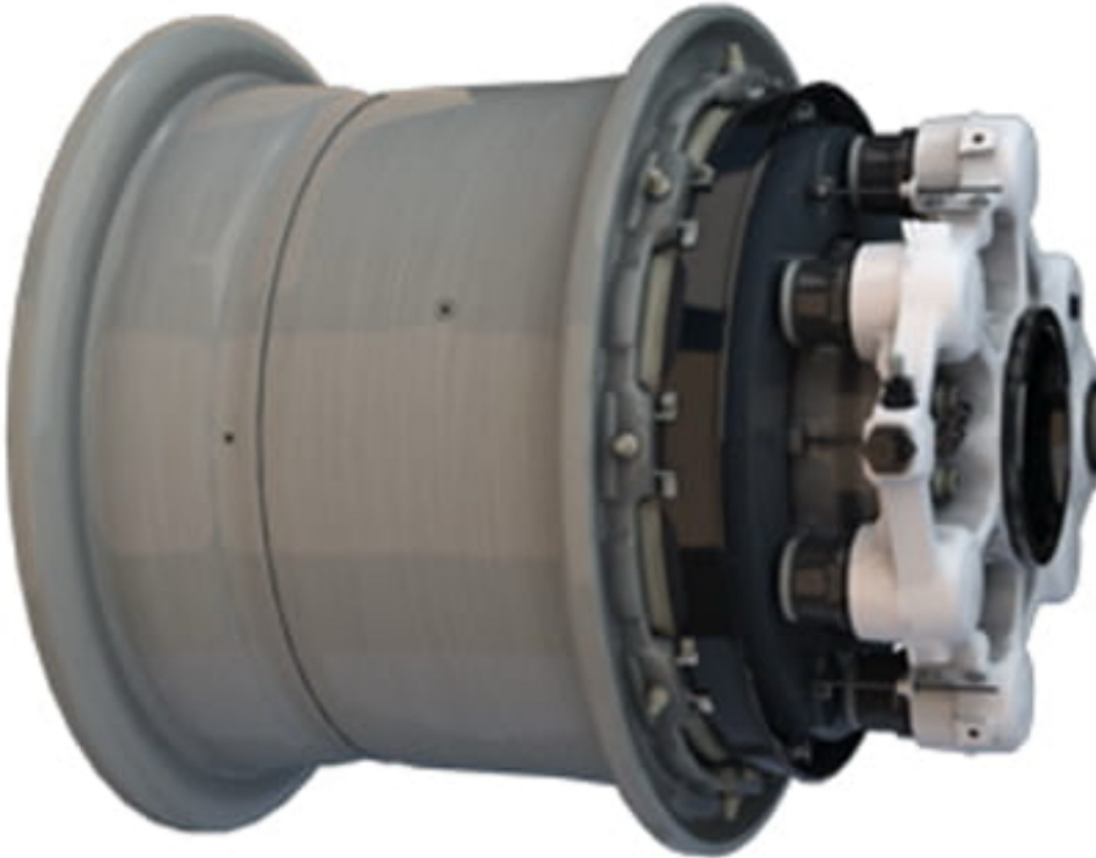

Replace the white image placement with an electric motor, and another on the other side. Attach the end/bottom of the above mentioned T section with pour welding right at the top of the wheel casing/hallow interior holder for the wheel above so it spins freely.



Landing Gear Camera | flight landing
wheel | 747 landing gear retraction |
Plane landing

[youtube.com](https://www.youtube.com)



CDT-AEROMAX-R Flightstick

[virpil-controls.eu](https://www.virpil-controls.eu)



CDT-VMAX Throttle

virpil-controls.eu



CDT-AEROMAX-LZ Flightstick

virpil-controls.eu



CDT-AEROMAX-RZ Flightstick

virpil-controls.eu



CDT-AEROMAX-L Flightstick

virpil-controls.eu



VelocityOne™ Flightdeck – Advanced Flight Simulator Setup

turtlebeach.com



VelocityOne Rudder Pedals For Flight & Racing Simulation

turtlebeach.com