


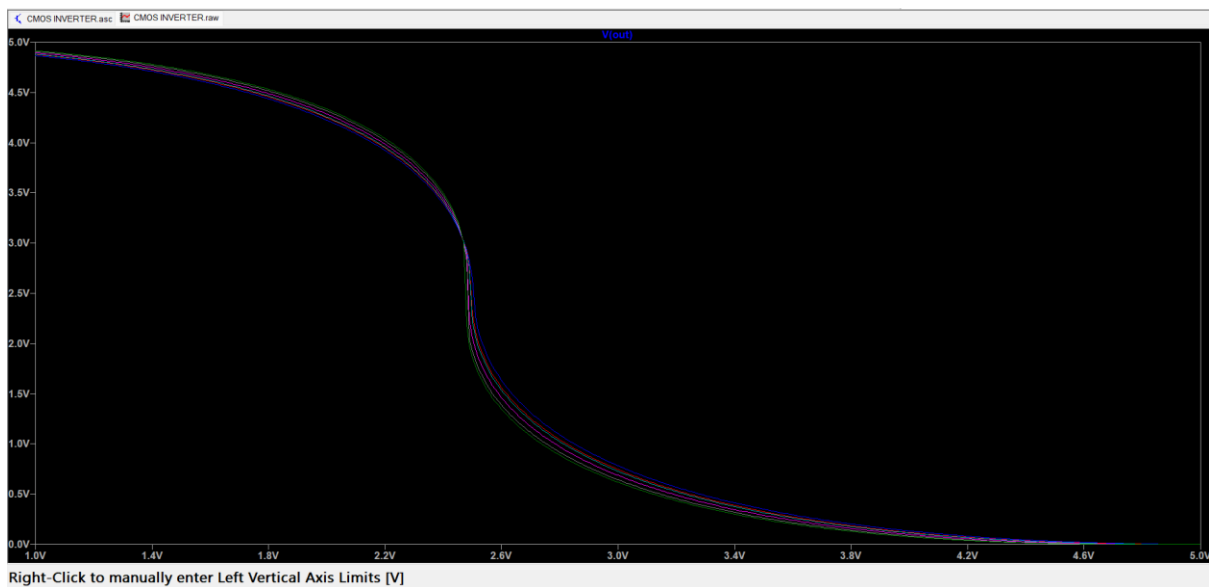


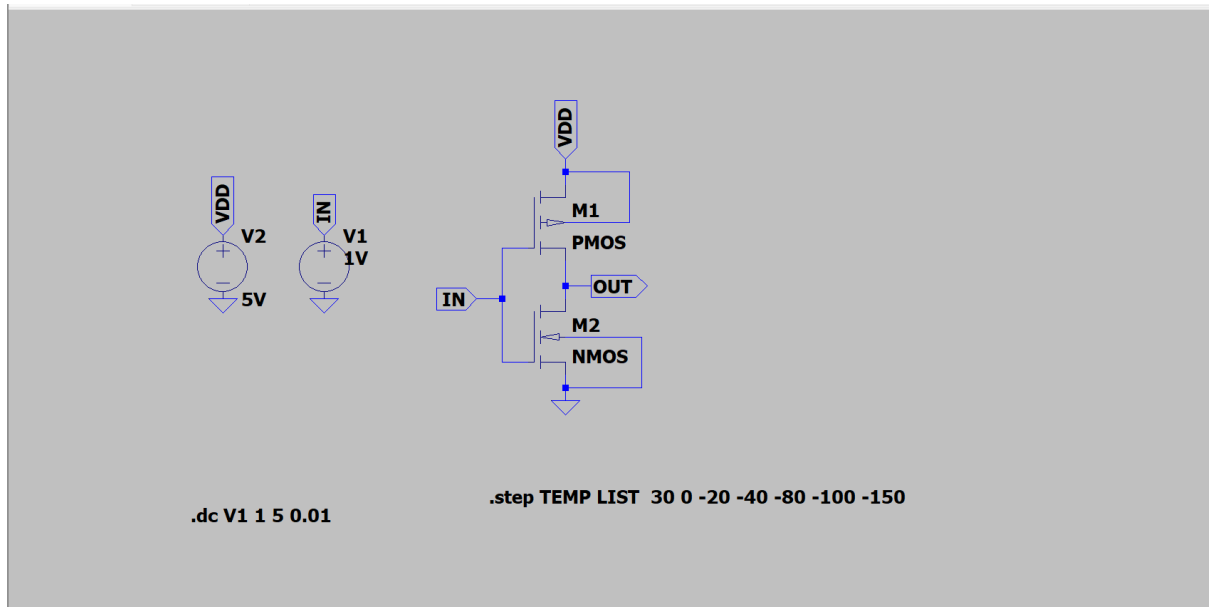


CORRESPONDING GRAPH

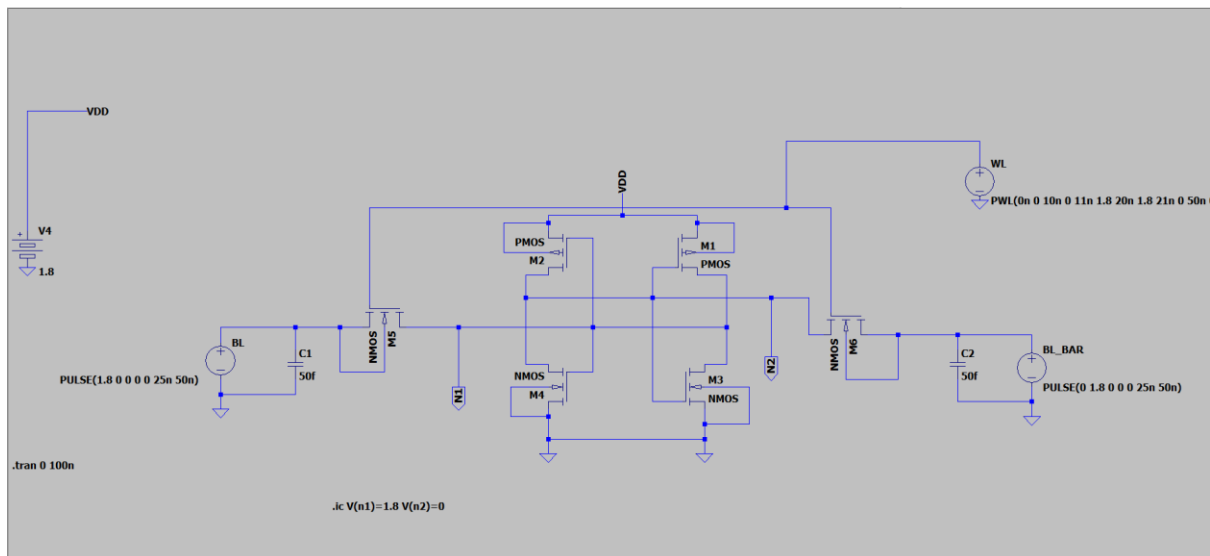


6T SRAM

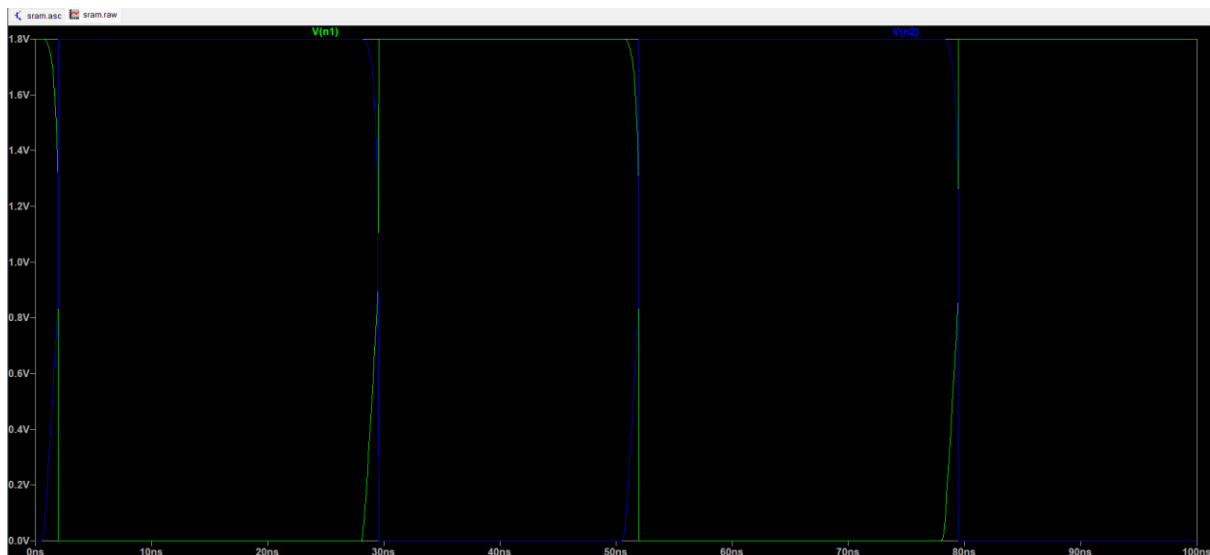


BETWEEN N1 AND N2

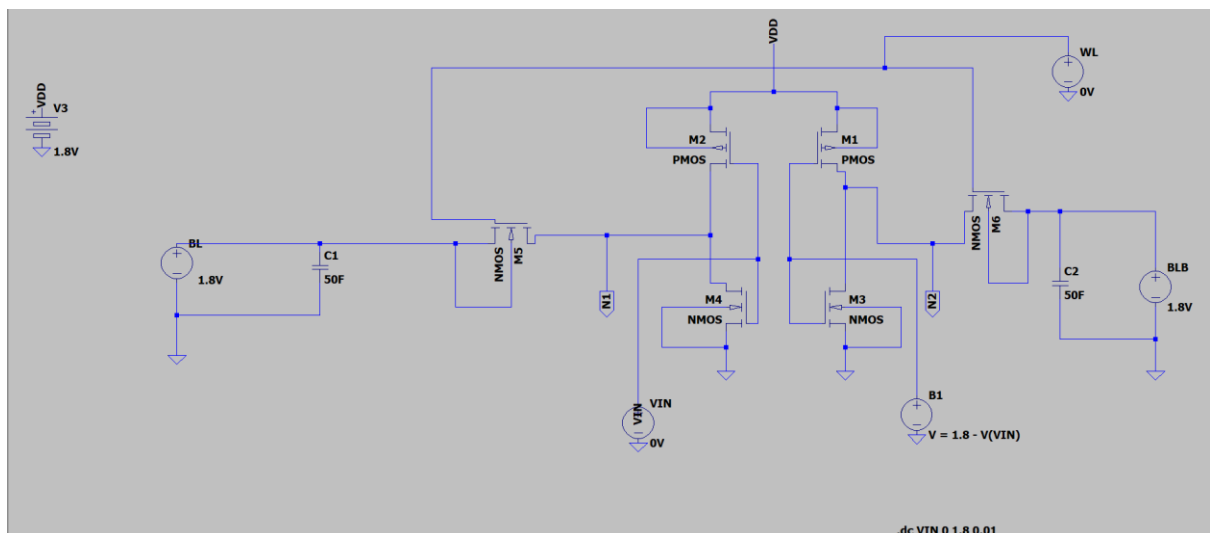


Replaced the cross-coupling with vin and v for stability analysis (hold SNM condition)

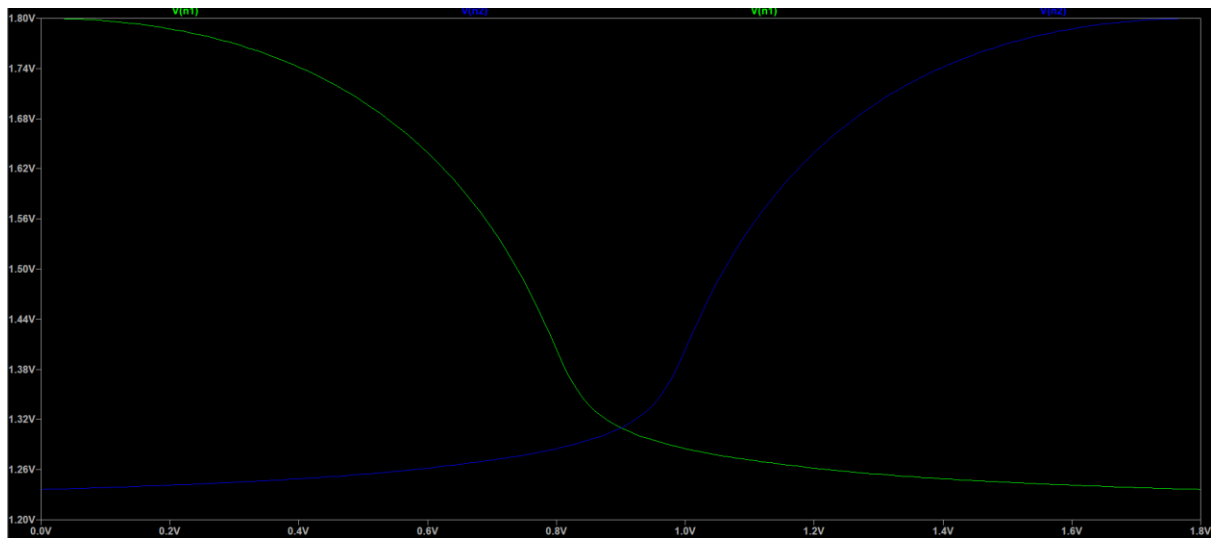


Mirrored lobes showing that both states are stable

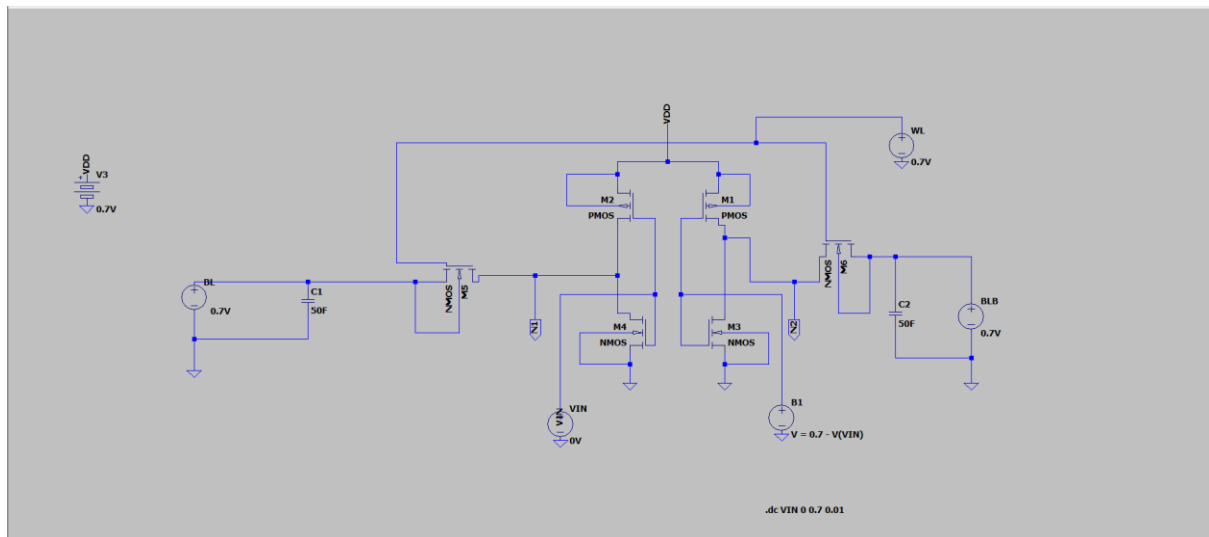


For read condition ...the circuit has been scaled to match nano meter scale...where $m1=m2=(L=20n, W=0.5\mu)$, $m3=m4=(L=20n, W=1\mu)$ and $m5=m6=(L=20n, W=0.7\mu)$ and $vdd= 0.7$ (taking account of real mos)

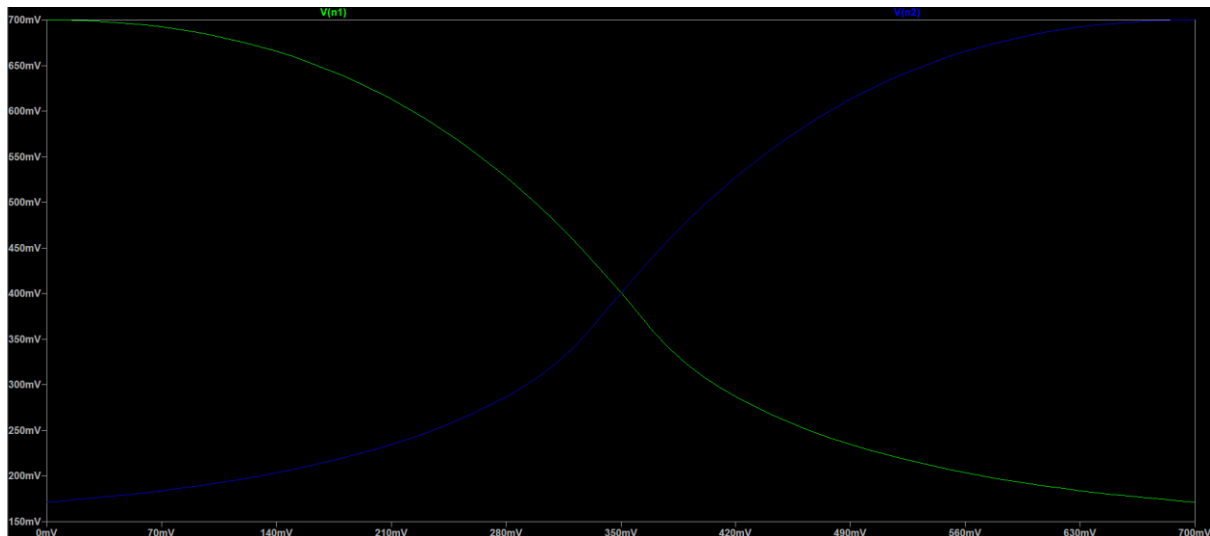


The graph shrinks and snm decreases

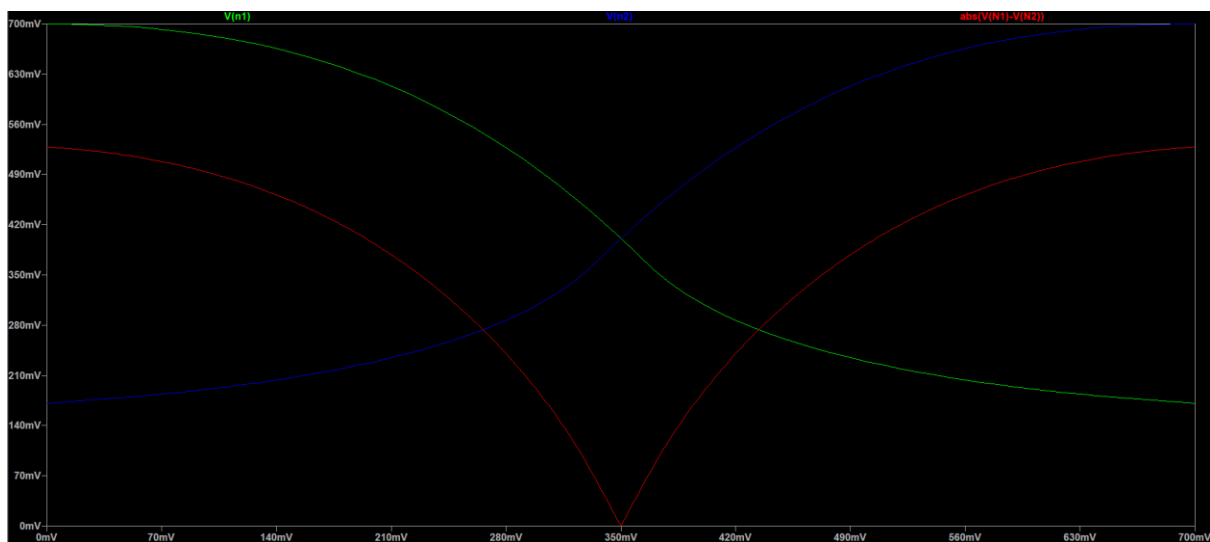


Snm extraction($0.35\text{V}/2=0.175\text{V}$)

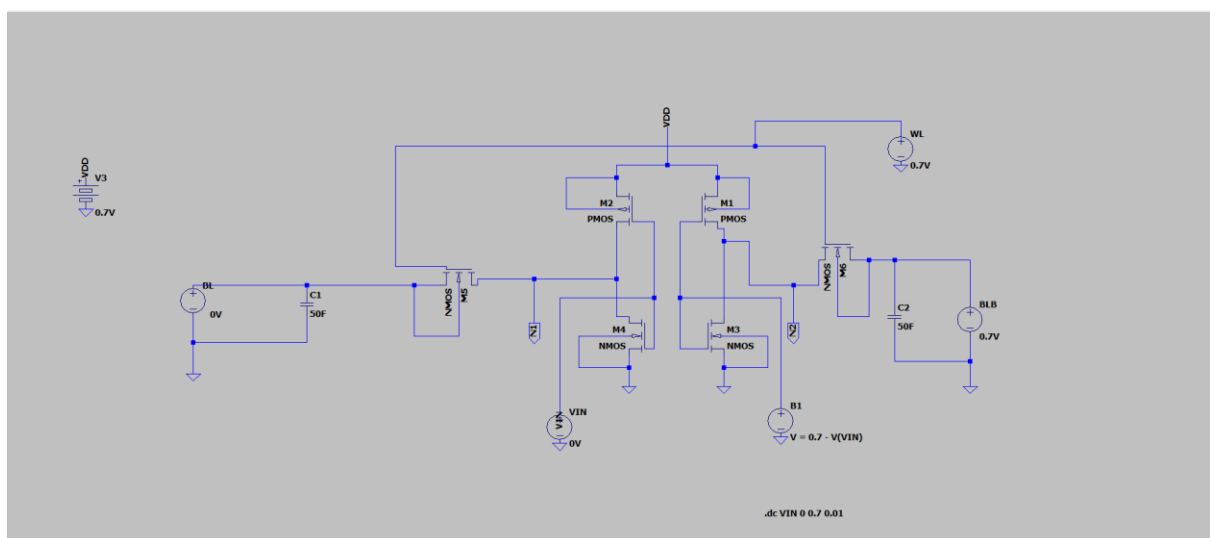


For write condition bl becomes 0

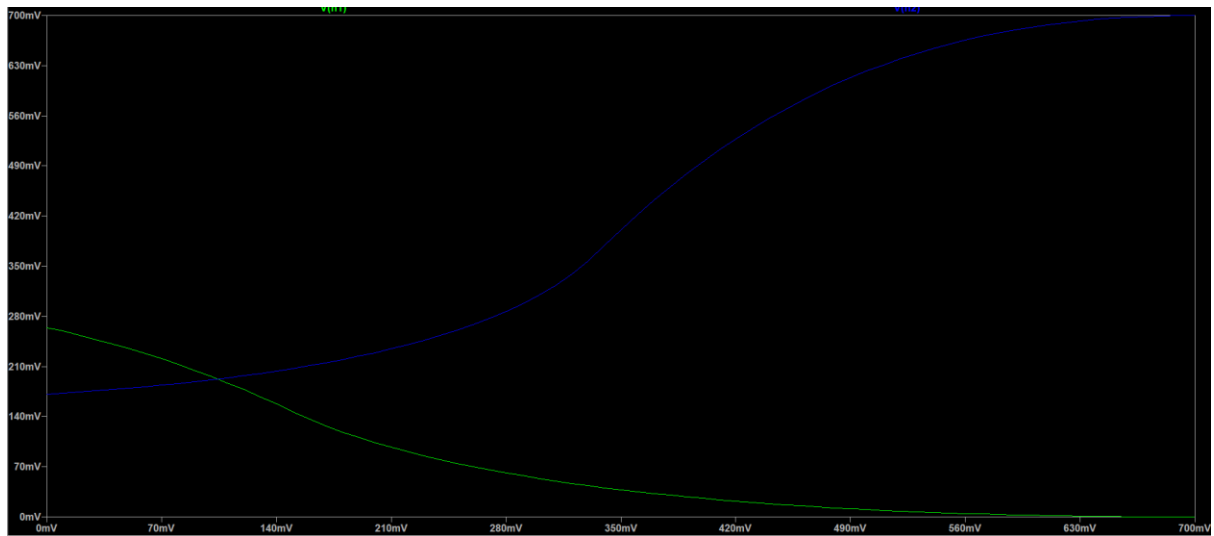

The graph shows that the write operation has taken place hence the asymmetrical graph

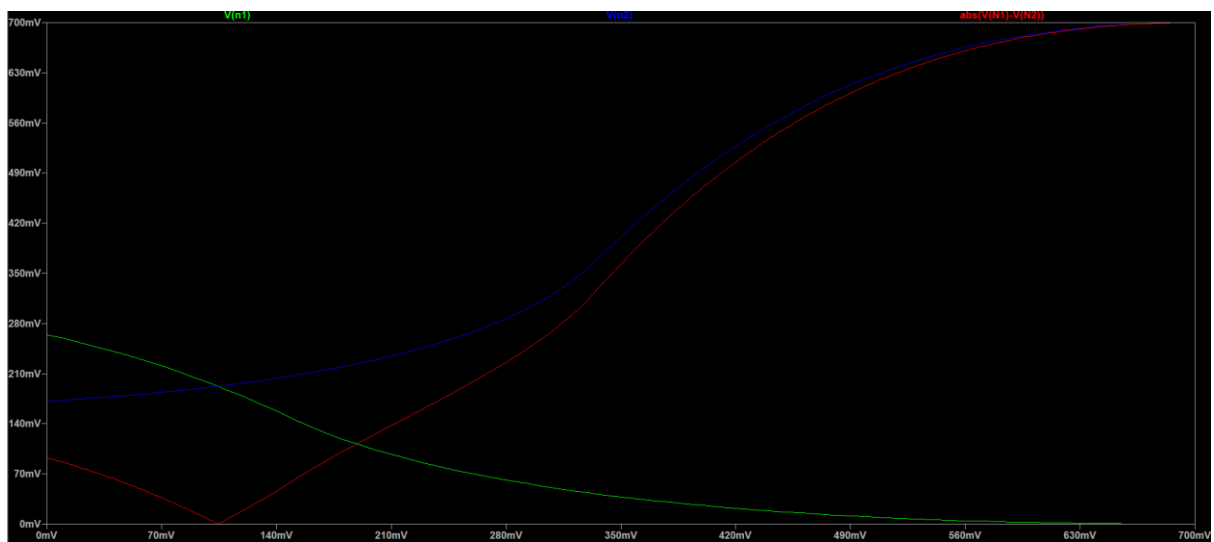

$$S_{nm} = 0.10/2 = 0.05$$

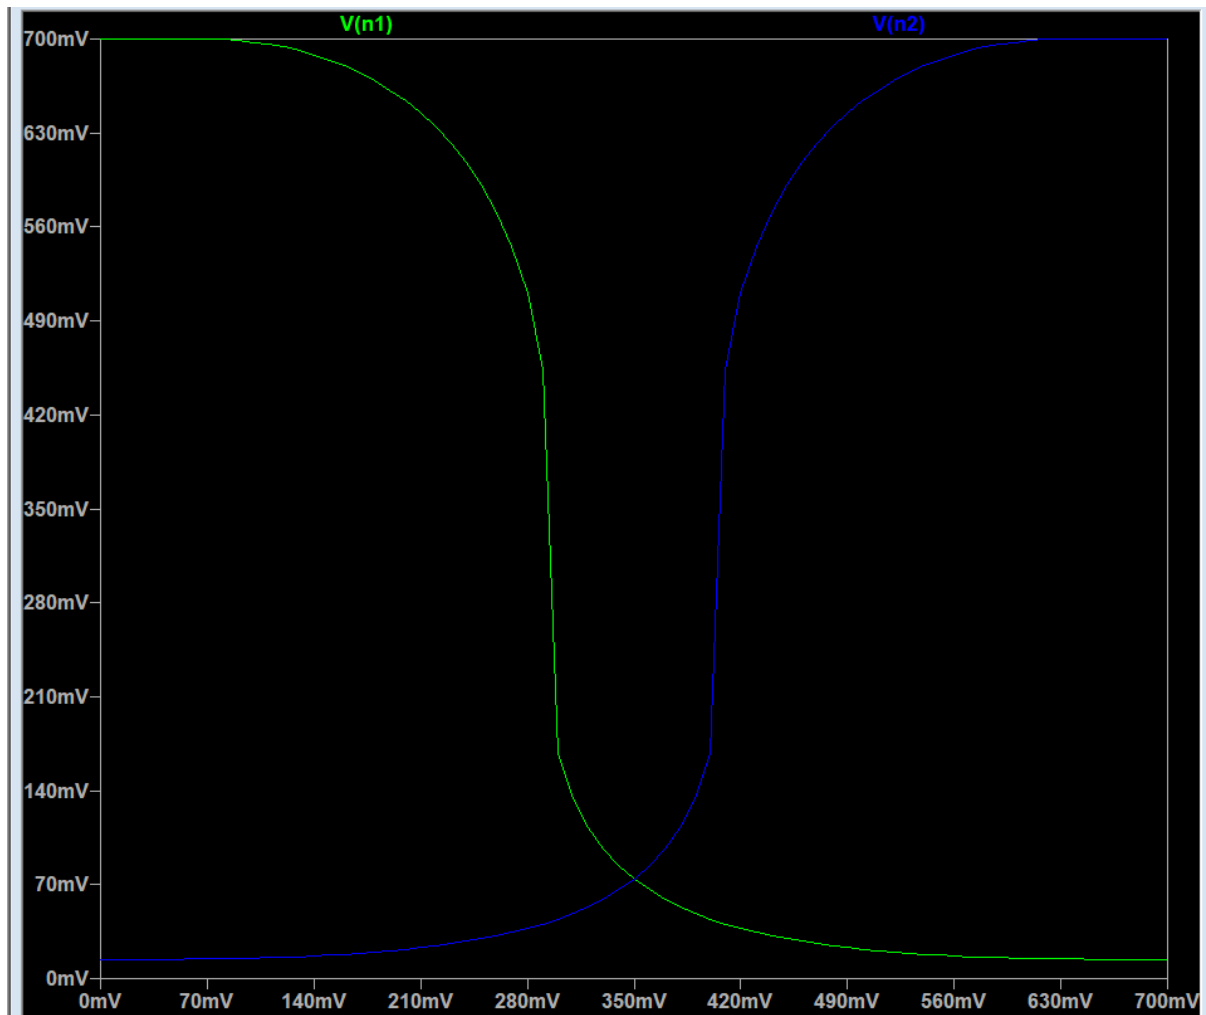





Hold condition after scaling




Snm extraction= 0.175v


Temp

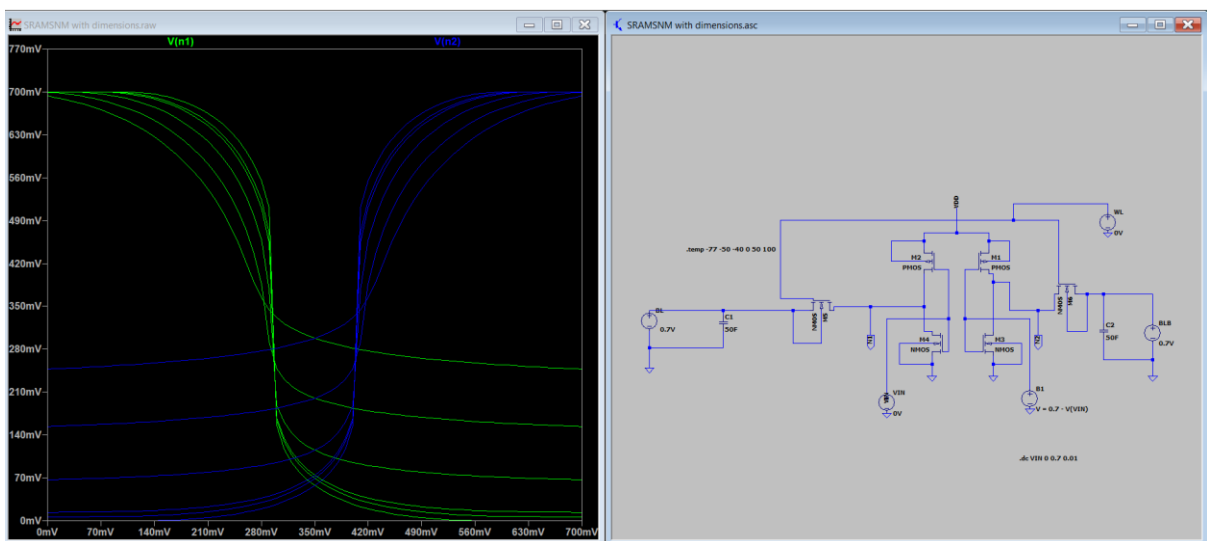

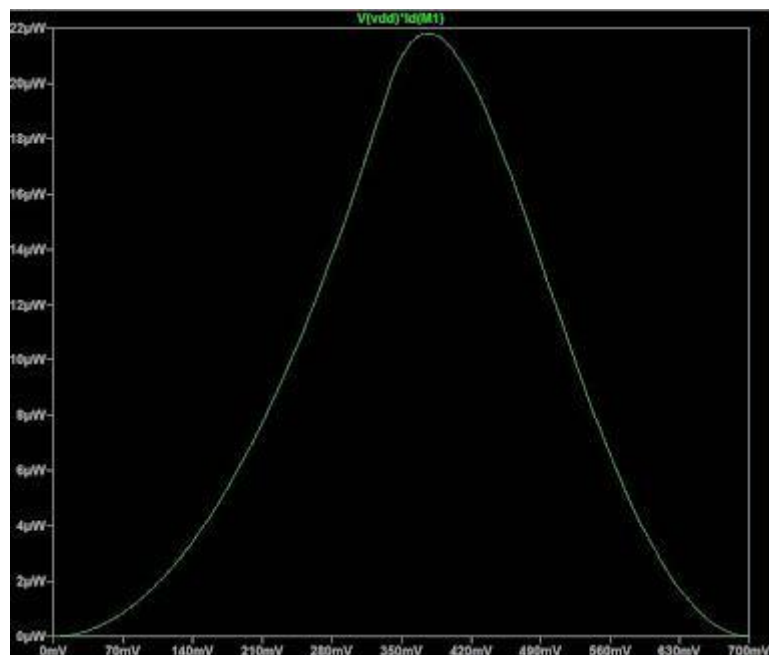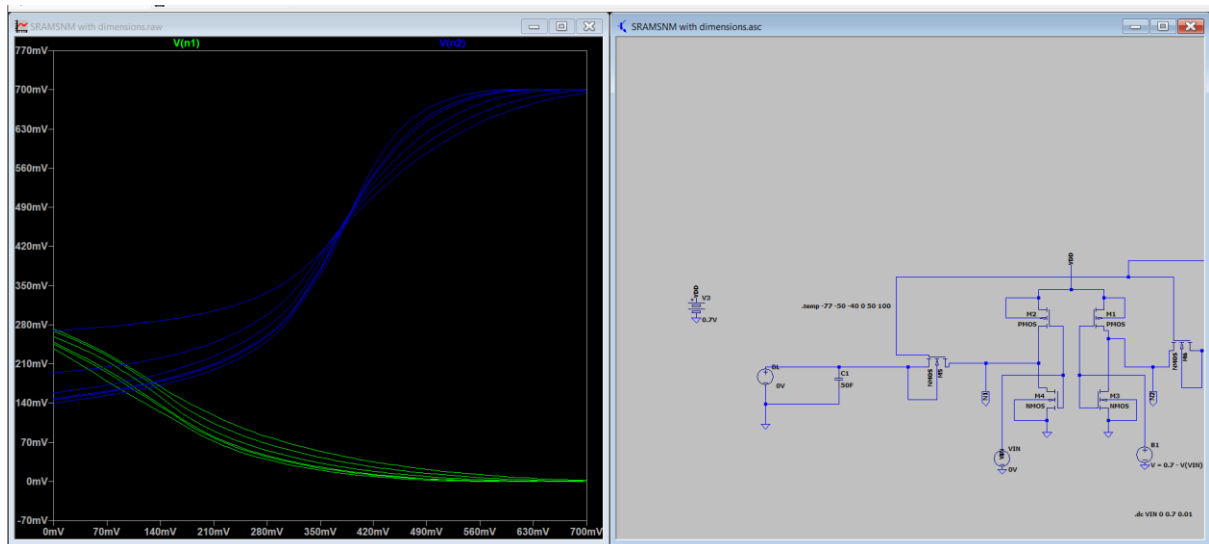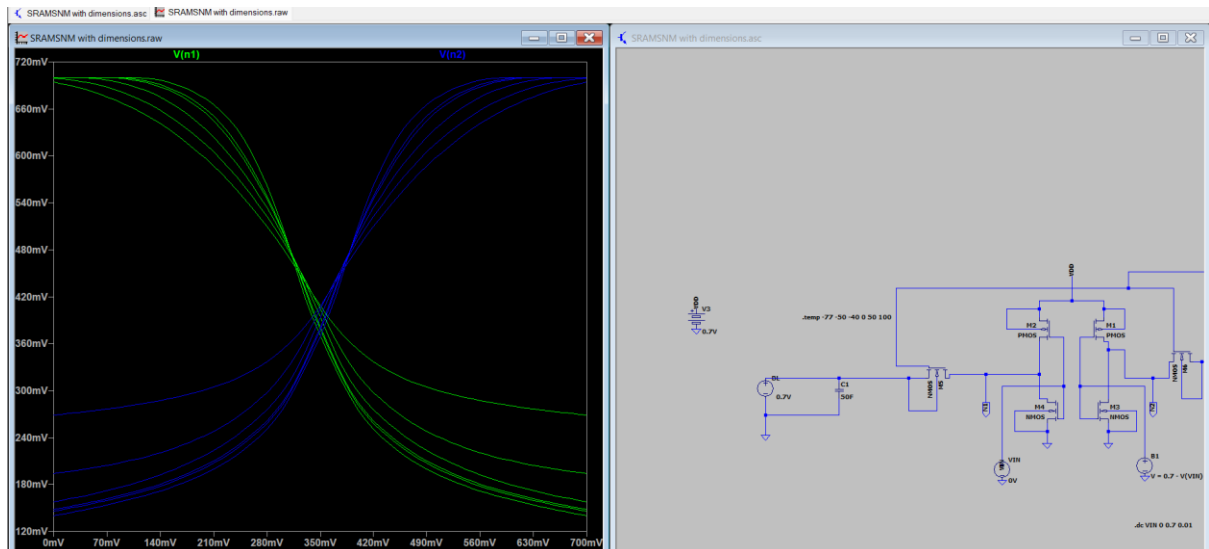

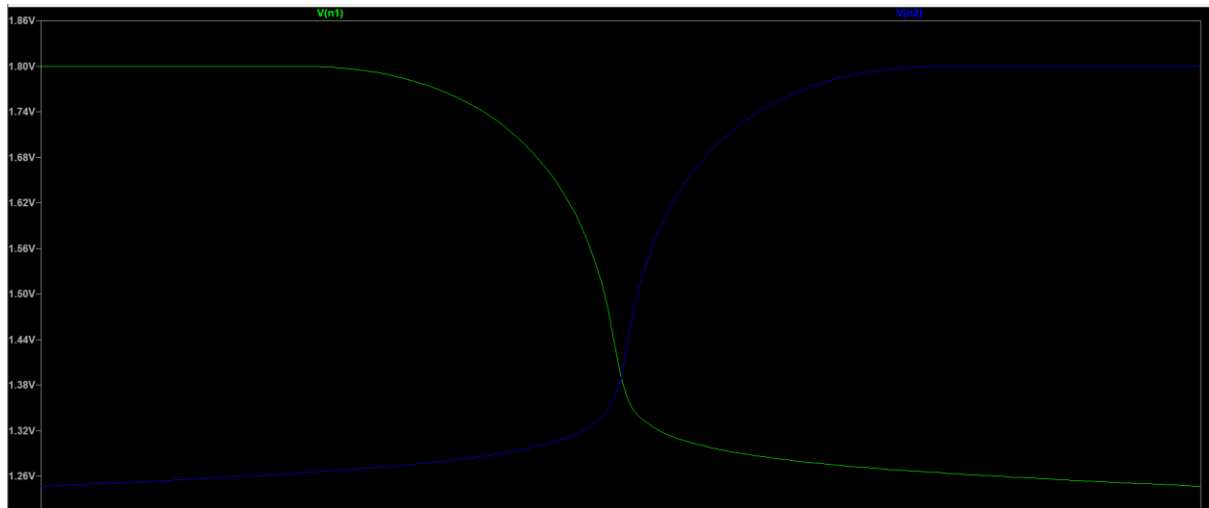

Monte carlo for read

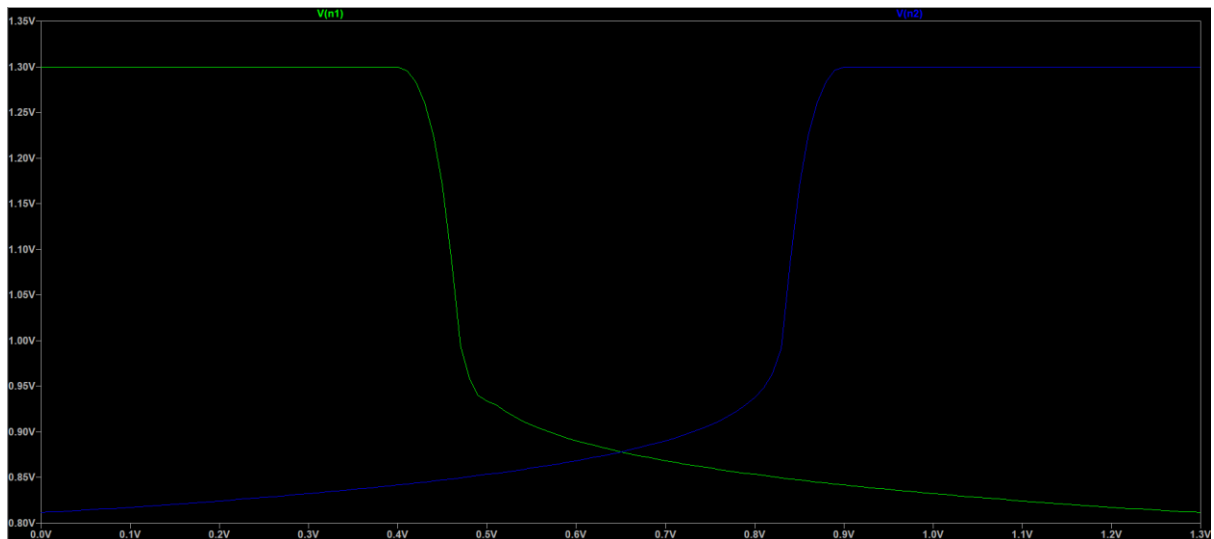

Increased the snm

