


Telemetry-based Optimisation for User Training in Racing Simulators

Francois Buhagiar

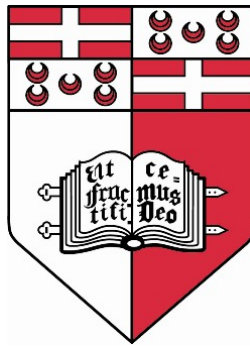

Department of Computer
Information Systems

University of Malta

March 2016

Submitted in partial fulfilment of the requirements for
the degree of B.Sc. I.T. (Hons.) in Software
Development

Abstract

¡To be revisited after the entire document is finalised as to include a sentence about each chapter.¿

Serious games are known to be an effective tool for improving learning. Recent years seeing an increase in a wide area of applications that flooding various markets. This project will be looking into utilising off the shelf hardware and software to simulate a race car being driven on track. On top of which a software will be developed to interpret user driving patterns and providing auditory feedback explaining what can be improved. The objective is to explore if there is any viability in using a serious game to help drivers improve their skills on a race track. After carrying out user studies and collecting data, data analysis is carried out from which conclusions are drawn regarding any improvements in the users' skills after using the system.

1 Acknowledgements

Luke for racing rig

Keith and Sandro

Contents

1	Acknowledgements	2
2	Other tables and lists	5
3	Introduction	7
3.1	Motivation	7
3.2	Why the problem is non-trivial	8
4	Background	9
4.1	Motorsport racing	9
4.1.1	Racing Line	9
4.1.2	Cornering and braking	11
4.1.3	Telemetry data	13
4.2	Racing Rigs	13
5	Literature Review	16
5.1	Video games and Serious Games	16
5.1.1	Pedagogy	17
5.2	Sim Racing	19
6	Research Methodology	20
6.1	Overview	20
6.2	Experiment Design	21
6.3	Experiment Materials	22
6.3.1	Hardware choice	24
6.3.2	Software choice	25
6.3.3	Questionnaire	25
6.3.4	Participants' Demographic	26
6.3.5	Participants' Insight	26
6.4	Procedure	26
6.5	Data Collection and Sampling	28

6.6	Data Analysis	28
7	Design and Implementation	30
7.1	Requirements	30
7.1.1	Sim Racing Rig	31
7.2	Supporting tools	31
7.2.1	Track Splicer	31
7.2.2	Log files Data Store	34
7.2.3	Spatial Querying	34
7.3	System Architecture	35
7.3.1	Telemetry Input Interface	35
7.3.2	Processing	35
7.3.3	Feedbacks being provided	37
7.3.4	Output Interface	38
8	Evaluation	39
8.1	Demographic of The Sample	39
8.2	Distribution Tests	39
8.3	Feedback System Results	41
8.4	Users' Feedback	43
8.5	Discussion	44
9	Conclusion	46
10	Future Work	46
11	Charts	47

2 Other tables and lists

List of Figures

1	Race line through a 90° right corner	10
2	Slip Angle of a tire understeering while turning left	11
3	Visual representation for oversteer and understeer	13
4	Visualised telemetry data from a Formula 1 team	14
5	Professional racing rig by CXC Simulations	15
6	Experiment Setup Schematic	22
7	Side view of the racing rig	31
8	track splicer input out	32
9	Splicing using vectors	33
10	Corner mid point	33
11	Track splicer tool	34
12	Microsoft Integration Services SQL import	34
13	Visual representation for part of the quad tree for the Silverstone national circuit	35
14	Overview of the system architecture components	36
15	Overview of the coordination threading	37
16	Gaming xp	40
17	Lap times vs session, clustered by group	41
18	Shapiro Wilk	41
19	Kolmogorow Smimov Test	42
20	Mann-Whitney	42
21	Mann-Whitney Accross Sessions	43
22	feedback system feedback	44
23	Sample age and gender	47
24	Licensed drivers experience	47
25	Where the track and car choice adequet?	48
26	How real do these componets feel?	48

27	Was the feedback intrusive?	49
----	---------------------------------------	----

3 Introduction

The aims and goals of the project. Any non-aims of the project (e.g. in a purely theoretical project, the development of an artifact would not necessarily be an aim). The approach used. Any assumptions. A high level description of the project.

The gamification of areas of activity such as marketing, problem solving and education [18] has validated the use of serious games beyond their initial military use in training strategic skills [8]. Serious games simulate real-world processes designed for the purpose of solving a problem, making their main purpose that of training or educating users. Their popularity has been steadily increasing, as has their adoption, with military [8] and emergency service providers (e.g. firefighters [18]) employing them to train for specific scenarios that might be encountered on the respective jobs. Motorsports cover a broad range of activities and vehicles, and as with all major forms of sporting activities, require training and dedication, with a pedagogic aspect arising in rote learning and mentoring by experts. The arenas in which motorsport events take place are called circuits; there is a large selection of the latter, ranging from purposely built race tracks to public roads to natural formations such as hills and quarries. There is also a diverse selection of vehicles that take part in motorsports, with the greatest demarcation existing between motorbikes and cars. The focus of this dissertation is that of unifying serious games and motorsport racing; specifically, it will try to show whether a serious game is a powerful enough pedagogical tool that can be used to tangibly improve the performance of race drivers. The scope of the project is limited to four-wheeled cars racing on purposely-built confined circuits with a smooth tarmac surface.

3.1 Motivation

The training process for race drivers has stabilised during the last decade, with rote learning playing a very important part. Starting at an early age, a driver would compete in lower leagues, such as go karting, and undergo training that

is mostly founded on trial and error. A mentor, or coach, would correct obvious mistakes and suggest ways for improvement based on experiential knowledge and related literature. The extensive hours of practice serve to hone the skills of a driver and help in the acquisition of the same experiential knowledge of the mentor. Such learning methodology is very resource consuming in that it requires both time and money; often it is geographically-constrained as well, where no suitable training track is available in the locality of the driver. Although simulators, such as those employed by professional racing teams, have helped mitigating traveling and car setup times, they are inadequate for use in more amateurish environments due to cost and logistical problems: setting up such a simulator requires adequate space seldom available to everyone. Democratising the learning process such that proper car control and racing techniques can be mastered by a larger demographic an important motivation behind this work.

3.2 Why the problem is non-trivial

The problem at hand is best described as an optimisation problem. Telemetry data provided by the car instrumentation system can be analysed to help identify driving patterns, specifically car-handling mistakes. The identification of these behaviours, which traditionally employs pattern recognition techniques, represents a challenge in itself. Behaviour recognition is key to providing corrective measures in order to improve the driving performance of a given user. In particular, it is the starting point in building a model which maps telemetry data to corrective measures for presentation to the user in real-time and deferred fashion, where even the visualisation of feedback is critical to the success of such a system.

4 Background

4.1 Motorsport racing

In sports individuals or groups compete to be first to achieve a particular objective. In the case of circuit motorsport races, in which motorised vehicles go round a course. Each racing discipline or series has its own rules. However, at the core, all disciplines participants aim to complete a full lap of the circuit in the least amount of time. Some disciplines focus on achieving one fast lap, such as time trials, while others focus on achieving the least amount of time across a fixed amount of laps, such as FIA's Formula 1 series. This dissertation will focus on confined car racing taking place on smooth asphalt surfaces in purpose built race tracks.

4.1.1 Racing Line

A race driver needs to figure out how to go round a piece of asphalt in the minimum amount of time [17]. In order to do so, he or she needs to develop techniques for more advanced vehicle control. One such technique is that of mastering the race line, which is considered the the fundamental skill a race driver must understand and master before moving on to anything else [17]. The racing line is the best path through a circuit, it is the path which takes the least time while keeping the higher average speed [6]. The trickiest part of the racing line to master is that of a corner, this task is split into two parts, identifying the line which should be taken and staying on the line. The first part refers to being able to visualise the racing line while the later refers to actually being able to control the car so that it stays on the line. Once the driver has an idea of the race line which the corner should be taken at, he or she must further split the line into three sections. The first part is the braking part, during this part the driver needs to decelerate in preparation for the corner, this is usually carried out in a straight line and end right before the turn in point. The turn in point refers to a point on the corner race line in which steering input is

applied, allowing the car to turn into the corner. The turn in motion should be a smooth one, taking the car all through the corner without having to do too much corrections to the steering. Being smooth while cornering allows the G-forces and centre of gravity of the car to not be abruptly effected which would result in unpredictable car behaviour [17]. The aim of the turn in section is to aim for the apex point, this is the inside middle point of the corner. The final part of tackling a corner is the acceleration part, after the apex point, the driver must start to gradually accelerate out of the corner while still turning out of the corner aiming for the outside apex.

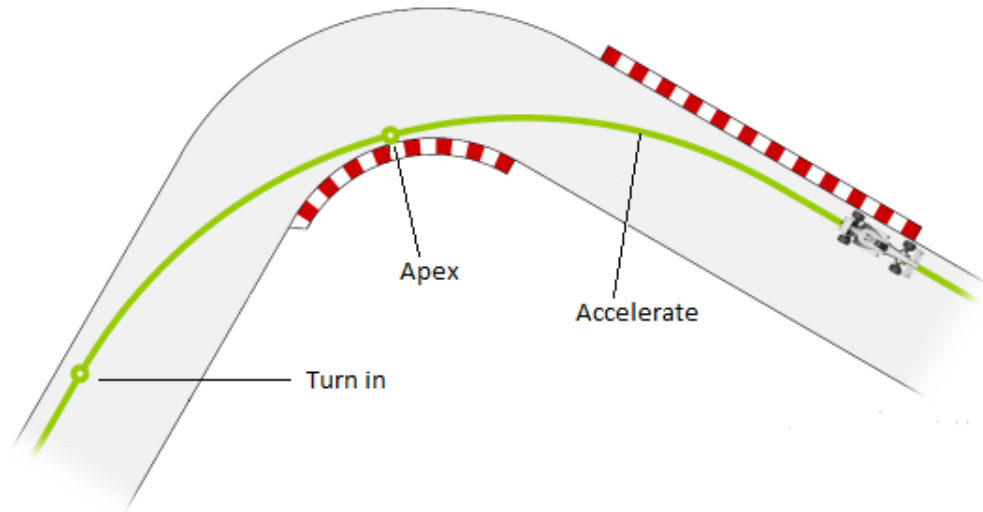


Figure 1: Race line through a 90° right corner

After the driver manages to drive the race line at a relatively slow speed, the driver must find the limit of the car. This is the maximum speed the car can be driven while still allowing the driver to have maximum control over the car. Various studies have been carried out to define such a limit in terms of the physical properties of the car and environment around it. The most important property is the level of grip the car can achieve and sustain on track. Various factors contribute to the level of grip, most notable are the tires which the car is being driven on, as the tires are the only actual contact to the track, allowing

for braking, accelerating and turning forces to be transferred to the asphalt [6].

Each tire has two properties which are of particular interest to a driver, the slip angle and slip ratio. The slip angle is the angle between a tire's direction of travel and the actual direction the tire is going towards. Given both the actual direction of travel and desired direction of travel are known, it becomes trivial to calculate the angle which is done by calculating the arch of the two vectors as shown in 5.

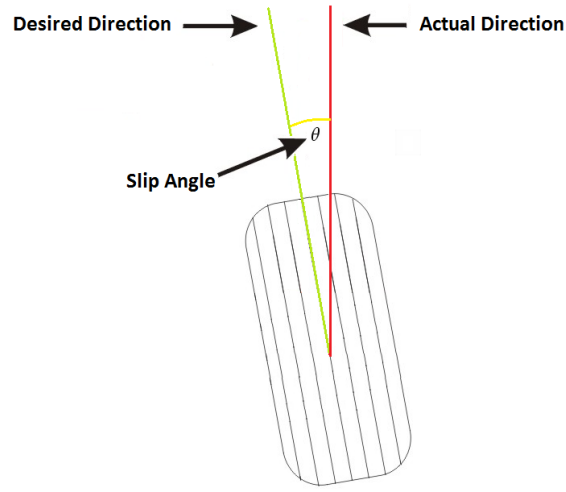


Figure 2: Slip Angle of a tire understeering while turning left

4.1.2 Cornering and braking

Whenever the slip angle is above 0 the tire is described as being in an understeering situation. Symptoms include Light steering, drifting towards the outside of a bend and possible tyre noise from the wheels. Assuming the tires are not damaged and the track is not wet nor dirty, understeer can be caused by active factors such as cornering speed throttle, braking, steering inputs and weight transfer. Other passive factors such as Weight distribution, drive layout, suspension and chassis setup, tyre type, wear and pressures also effect understeer. An understeer situation in a corner can be avoided by not entering too

fast into a corner, not accelerating too aggressively in a corner, not braking through a corner, and not making any sudden changes which drastically upset the weight distribution of the car. Passive factors have to do with the way a car is mechanically setup, such factors will be taken in consideration during this project but will not be given great importance as this project aims to improve the driver's skills. The project will focus on the active factors as these are the ones which the driver has direct input on while driving a car. It is known for a tire to have an optimal slip angle, this is the slip angle at which the tire can produce the most grip while cornering. A common road tire's optimal slip angle is of 5 while a slick tire which is purpose built for racing has an optimal slip angle of 8-10. These values may vary a bit depending on the tire brand [6]

Moving on to oversteer, this is another issue which can arise from lack of grip. Whereas understeer is caused by lack of grip in the front tires, oversteer is caused by lack of grip on the rear tires. Symptoms of oversteer include having the rear of the vehicle becoming unstable and 'light' and the car starts to rotate so the driver is facing towards the inside of the corner. Active factors causing oversteer are cornering speed, throttle, braking, steering inputs and weight transfer. The driver can avoid oversteer by not braking while in a corner and not accelerating too hard in a rear wheel drive as it makes the rear tires spin too fast, losing traction with the road.

During acceleration and braking the tire experiences rotational forces, however these rotational forces do not match the expected velocity, this means at all times there is some level of slip occurring between the tire and the road beneath it. This slip is called slip ratio and is expressed in percentage. A slip percentage of 100% would mean the tire is rotating, but the road is stationary, this is called a burnout or wheel spin. On the other hand, a percentage of -100% would mean the tire is not rotating but the road beneath it is moving, this can occur while braking hard and is called locking the wheels [20]. While braking the driver must make sure not to lock up the tires as this will cause the tires to wear out quicker while also drastically increasing the stopping distance. On the other hand braking too lightly will make the car take longer to decelerate with

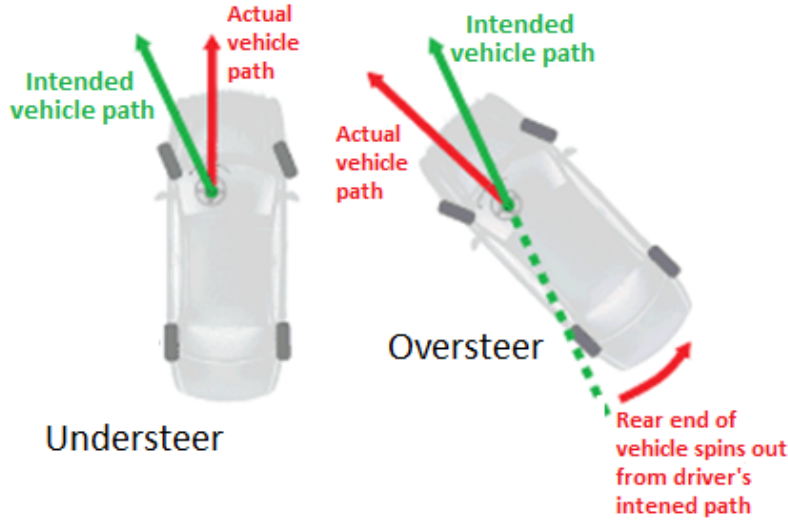


Figure 3: Visual representation for oversteer and understeer

makes the driver lose time. In order to braking optimally the slip ratio should be between 10% to 15% [17].

4.1.3 Telemetry data

Telemetry data is domain specialised data contains measurements and other data collected at remote or inaccessible points and are subsequently transmitted to receiving equipment for monitoring [3]. In motorsport telemetry data contains measurements from the engine and other vehicle dynamics. From these measurements one can the vehicle state at a particular point in time, such as speed, engine speed, temperatures, slip angles, slip ratios and so on. Telemetry is widely regarded as being the most important source of information by motorsport engineers as engineers can analyse this data and better under stand the car's and driver's strength and weaknesses [12].

4.2 Racing Rigs

Moving on from the real world into the simulation world in which a racing rig is an integral part of achieving an authentic feel to the simulation experience.

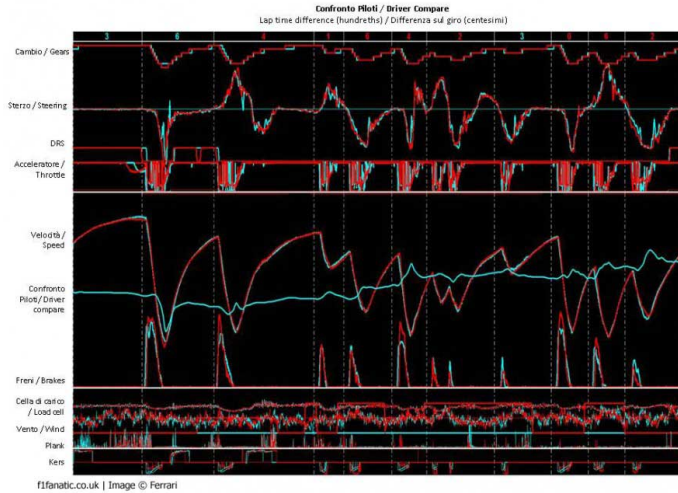


Figure 4: Visualised telemetry data from a Formula 1 team

Racing rigs vary in price starting from a bundle with a steering wheel and pedal set costing less than 100 to ones used by professional racing teams costing thousands. The difference in price is partially due to built quality, but the biggest contributing factor is attributed to how well the rig mimics the real world. This is achieved by integrating force feedback, butt kickers and hydraulic pistons. Racing rigs can be categorised by four price range brackets. Entry level refer to the cheapest price range, racing rigs in the range offer the basics to get some one up and running.

The most basic racing rig is one which only has Steering wheel, than more sophisticated ones are made by adding pedals, shifters, racing seat, mounting frames and hydraulic pistons. Butt kickers and hydraulic pistons are commonly integrated in high end rigs such as ones built by Vesaro. Force feedback is a form of haptic technology which used to replicate the forces which are transferred through a steering wheel in a car onto the driver [15]. Butt kickers and hydraulic used to simulate lateral and longitudinal forces which a race driver is exposed to during racing.



Figure 5: Professional racing rig by CXC Simulations

5 Literature Review

5.1 Video games and Serious Games

Baranowski et al [23] define games as a physical or mental contest with a goal or objective, played according to a framework, or rule, that determines what a player can or cannot do inside a game world. The definition covers the setup of a game, while a physical or mental contest, played according to specific rules, with the goal of amusing or rewarding the participant the reward aspect of games.

Video games are built on top of these core values with the addition of having the game world confined to some sort of digital medium. The first video game was created by William Higinbotham; it was a tennis game to be played on a television set [21]. From the early days of video games, their main aim was always to provide some degree of entertainment. The entertainment value is achieved in various ways depending on the gaming platform, game genre and the target audience. Modern video games are simply made up of three fundamental components: story, art and software [24].

Moving on to serious games this type of games are considered a mix of simulation and game to improve education [4]. The idea behind a serious game is to connect a serious purpose to knowledge and technologies from the video game industry [18]. The boundaries of serious games are debated, mostly due to the fact that serious games attract multiple domains making it hard to come up with a common boundary. However, the common denominator across all domains seems to be serious game designers use people's interest in video games to capture their attention for a variety of purposes that go beyond pure entertainment [8].

The main contrast between video games and serious games is the use of pedagogic activities which aim to educate or instruct knowledge or skill [24] in serious games as opposed to the pure leisurely aspects of the video game. Pedagogy is given preference over the amusement value which in some cases might not be found in serious games [24]. All serious games involve learning,

whether eye hand coordination skills, visual-spatial skills, which buttons to push or what to do in a certain scenario. This is the fundamental difference between serious and entertainment games. Serious games need to educate the player with a specific type of content, whereas entertainment games need to entertain the player with whatever; racing, puzzles, it does not really matter, as long as the player enjoys it [11]. With an entertainment game, development's main objective is too make the game fun, the content and controls should be at the service of making the game entertaining, On the other hand, serious game designers have multiple objectives, they still need to create a compelling and fun game, but also an educating and realistic game. From this it follows that three aspects as essential for a serious game, fun, learning and validity [11]. One should not forget that a serious game is fundamentally a game, and a game should be fun. The game should make use of pedagogical methods and theories to ensure knowledge can be conveyed. Validity is related to the content which is being tackled in the serious game. The content which is being taught should teach relevant content that can be applied outside of the game world.

5.1.1 Pedagogy

In order to produce a valid pedagogical experience aspects as learning objectives, target groups and challenges needs to be clearly identified before designing a serious game [19]. Various pedagogy theories exist which can be applied to a serious game, some of which are behaviorism, cognitivism, constructivism and situated learning [9]. From each of these theories one can extract some important properties.

Experience Games tend to provide learning-by-doing, Many games make use of pop-up windows with extensive amount of text that are supposed to have educational value. This technique could provide too much information, time pressure or other factors inside a game environment which could potentially lead to cognitive overload or lead a person to filtering out critical information [9].

Exploration An important property of a game is that of requiring an active, participative attitude of the learner. The game world, including rules, mechanics and environment need to be explored and discovered by the learner. Many poorly designed games force the player to do something, while they should just let the player figure it out or at least guide the player into doing so.

Incremental The learning process should occur incrementally as it will otherwise be too demanding for a player, and that is the way the human brain functions. Humans acquire knowledge piece for piece and try to integrate this into existing structures [19].

Deciding on a pedagogy is no easy task, one must take into account the aims and objective which is the pedagogy task is trying to achieve while also considering any capabilities and limitations the target audience might have. Such consideration must be made when designing the way information is channelled back to the user. Three main channels are considered, auditory, visual and kinaesthetic. The choice of which to use relies heavily on the domain and the end user. Some instructions might be able to be better conveyed through visual cues, while other work better as auditory or kinaesthetic, however, previous work found out that a mix of channels work better as one can complement the other [13]. Such cases include instances in which timing is a factor, having a visual image further explained with audio or vice versa. A further consideration has to be made when applying this to the vehicle driving context, it is important avoid or at least minimise the effect such channels might have on the concentration of the driver. The driver is already focusing by keeping eyes on the road, usually focusing on the centre of the road ahead also keeping in the look out with rapid eye glancing at any obstacles in the vehicle surrounding area and staying attentive for any auditory cues coming from the environment which could highlight any danger [10].

5.2 Sim Racing

Simulation racing games (sim racing) such as Asseto Corsa [1] and Project CARS [2], which are off-the-shelf products, provide a sim racing experience within budget for the average video game consumer. The aim with such games is to replicate real life cars, race car dynamics and track locations to amuse and entertain the player. The challenge aspect is achieved by pitting the user against other computer drivers known as AI players, or in multiplayer online races, which are played against other human players. In some cases, a user can compete against oneself by taking on a ghost - a recording of the player's best lap for a particular track. Sim racing the definition of what a video game is however, they miss the pedagogy activities which would qualify them as serious games. Most of the modern sim racing games do aid the player to improve by means of implementing aids. Such aids might include showing the racing line while also highlighting the braking and acceleration points. Other aids include anti lock brakes, traction control and stability control, these are implemented in a passive way. With the exception of the racing line, the player is not told when and what is being done wrong. This results in users having to figure out their own mistakes by means of practicing without any guidance or feedback from within the game. This final year project aims to implement a module which is plugged into an off the shelf racing simulator which. This module trains users by letting them know what is being done wrong, when it's being done wrong and most importantly how to avoid making the same mistake. Further more this project builds on the premise put forward which shows that users are able to learn road driving skills into a virtual world and then successfully applying them to the real world [15] [22]. Although studies have been carried out involving training for road drivers, none have looked into teaching on racing circuits with the aim of improving racing and car handling techniques.

6 Research Methodology

This chapter provides a detailed exposition of the methodology used throughout this work. This study has conducted exploratory and descriptive research to determine whether the use of simulation and an automated feedback driven system, a user can be trained as a race driver. The chapter is structured as follows: § 6.1 provides a general overview of the overarching methodology used in the study, § 6.3 describes in length the design of the instrument used to acquire experiment data and results, § 6.4 presents the experimental procedure and the rationale behind it, § 6.5 identifies the information and data acquired through the experimental and descriptive methodologies employed, and finally § 6.6 presents the data analysis mechanisms employed to substantiate our conclusions.

6.1 Overview

This study conducted experimental and descriptive research on the viability of the use of simulators in conjunction with an automated feedback system for improving race driving skills in the normal population. Specifically, a user study was devised and carried out with the primary goals being:

1. To determine whether a context-based feedback system can improve the skills of a participant
2. To quantify the magnitude of this improvement, if (1) is true

These goals were addressed by means of an experimental setup based on a race-driving simulator, using which objective measurement of the participant performance could be gathered and analysed, and a questionnaire for relating the participant's experience with the experimentally-gathered data. The setup of the experiment is explored in more detail in § 6.3.

Since the main goal of this study is that of assessing how effective a feedback system is in the learning process, the independent variable in the experiment is the ability to receive feedback. The hypothesis is that participant performance

(such as average lap time) is improved through feedback, and is thus a dependent variable. However, practising without feedback can also lead to changes in the dependent variable; therefore this is controlled for by having two groups of participants: the experimental group that receives feedback and the control group that doesn't. Random assignment is used to determine a participant's group.

A questionnaire, to be administered to the participants at the end of the session, will be designed to help normalise and control for other factors that may influence dependent variables, and hence, the outcome of the experiment. The design of the questionnaire also helps in bridging the participants' perception of their performance with the actual performance data, possibly providing further insight into the results. A questionnaire was preferred to an interview because it is easier to administer, it lends itself to group administration and also allows confidentiality. It is indeed true that interviews permit a greater freedom of expression on behalf of the participant; however, questionnaires create a sense of anonymity that encourages the participants to be more truthful in their answers [14].

6.2 Experiment Design

In the experiment, each group would be utilising the same car and racetrack. Bastow et al. [5] suggest that cars equipped with a front wheel drivetrain may be easier to handle. The Fiat 500 Abarth was the car chosen for the experiments, partially based on Bastow et al.'s findings. The car is relatively low-powered and thus, easier to use by beginning drivers. The Silverstone National race track has the desirable properties of being flat and smooth, without uneven surfaces or bumps which may result in loss of control in rookie drivers. Furthermore, the way the track is structured, with wide run-off areas located along the circuit where drivers are most likely to lose control of the car, allows the car to slow down before colliding with barriers or other stationary objects.

Two feedback mechanisms have been considered for this experiment, *visual*,

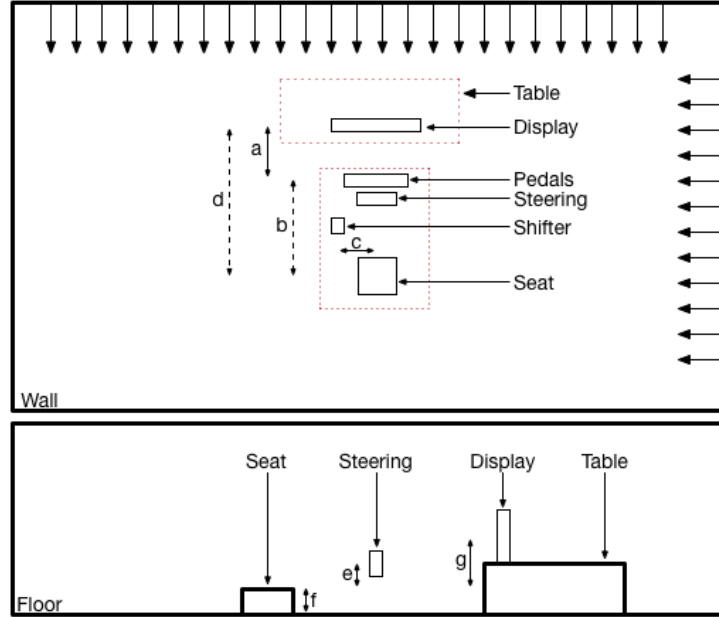


Figure 6: Top-down and side views of experiment setup

through the use of a heads-up-display (HUD) superimposed on the simulation display, or *auditory*, by means of descriptive speech projected through loud speakers. Leahy et al. [13] argue that auditory feedback is less intrusive than visual clues; based on these findings, it was decided that the system should provide feedback using auditory clues.

6.3 Experiment Materials

The setup of the experiment was divided into three material categories: *simulation environment*, *simulation hardware* and *simulation software*, with each category subscribing to a number of desirable properties:

Environment The experiment should be carried out in an isolated, noise-free and well-lit room. Participants would be let in the room one at a time, to ensure the experiment is conducted without any distractions.

Hardware The hardware components identified for this experiment are the (i) display output, (ii) audio output, (iii) steering wheel, (iv) gear shifter, (v) acceleration, brake and clutch pedals and (vi) seating frame.

Display and Audio 32 inch lcd display capable of 1080p resolution with integrated stereo audio output.

Driving Controls The driving controls include (ii)-(iv); minimally a steering wheel should provide the same number of revolutions as a racing car, providing accurate force feedback to let the participants accurately assess the behaviour of the car. Gear shifters do not implement feedback mechanisms; however, given their ubiquity, H-shifters are preferred since they are the kind most drivers are familiar with. High-end pedal systems use hydraulics to simulate the variability of force required on part of the driver to actuate a pedal during different stages.

Seating frame The seating frame should ensure a seating position akin to a driver in a racing car. The seating frame should also provide the ability to move the seat back and forward in order for participants to be able to seat comfortably and be able to reach the pedals.

Software The chosen sim racing game must include (i) realistic driving model, (ii) real life tarmac circuits (iii) ability to disable wear and tear on the car, (iv) quality of graphics and most importantly (v) provide means to read telemetry data while also being easy to interface to.

Real life tarmac circuits Most sim games replicate accurately tracks, including elevation changes, bumps and distances. By having the level of realism, participants can be exposed to real life scenarios.

The circuits also need to be a loop so that participants do not need to reset the game to do another lap, which could be tedious.

Ability to disable wear and tear This is important as it allows for better controlling of experiment variables as cars will not get progressively worse during a session hindering a participants.

Quality of graphics The game should be visually appealing in order to provide the right level of impressions. Sim games might prefer to allocate more processing power to the physics engine which impacts the quality of the graphics produced. In the case of the project good graphics will be given a slight preference.

Read telemetry data In order for feedback to be given out, it must be possible to be able to know what the car is doing on track. This is achieved by having the sim game allow 3rd party software to read the telemetry data.

6.3.1 Hardware choice

The comparison table shows the desired properties the steering wheel controls should have. The G25 is the only which comes as a bundle with a three pedal set and H shifter on top of that, it's also the cheapest. The Trustmaster TX and Fanatec are more high end which explains the spike in price. These two do not come with a three pedal set nor an H shifter but can be purchased separately for an extra cost. The G25 is the obvious choice given it's relative low cost and the ability to supply decent force feedback.

	G25	Trustmaster TX	Fanatec
Cost (EUR)	240	324	499
900° turn	✓	✓	✓
Three pedal set	✓		
H Shifter	✓		
Force Feedback	✓	✓	✓

6.3.2 Software choice

The comparison table shows the desired properties a sim game must have, and a selection of games which have been considered. From the start it is clear, Dirt and Forza Motorsport 6 should be discarded as none provided telemetry data to be read. Assetto Corsa, Project Cars and iRacing are closely matched, however Assetto Corsa has the leading edge as it provides an easy way to interface via UDP, well document and wide developer community who can help. Furthermore Assetto Corsa provides good visual graphics. For these reasons Assetto Corsa has been picked as the game to be used.

	Assetto Corsa	Project Cars	iRacing	Dirt	Forza Motorsport 6
Realistic model	✓	✓	✓	✓	✓
Tracks	✓	✓	✓		✓
Disable wear	✓	✓	✓	✓	✓
Telemetry data	✓	✓	✓		
Ease of Interfacing	✓		✓		
Quality of graphics	✓	✓		✓	✓

6.3.3 Questionnaire

Questionnaires allow for further insight from the point of view of the participants. Leary et al. provide seven guidelines for compiling a questionnaire [14]:

1. being specific and precise in phrasing the questions
2. writing the questions as simply as possible, avoiding difficult words, unnecessary jargon, and cumbersome phrases
3. avoid making unwarranted assumptions about the respondents
4. conditional information should precede the key idea of the question
5. do not use double-barrelled questions
6. pretest the questions

Responses from questionnaires designed using these guidelines are valid in the general case. The challenge in choosing a response format in a question lies in identifying whether one should go for an open ended question in which more information might be collected, or on the other hand, use a rating scale response format, where the response is more constrained but may be easier to analyse. Leary et al. suggest using the former for questions dealing with behaviours, thoughts, or feelings that can vary in frequency or intensity (e.g. the Likert Scale [16]) and using open ended questions in cases where further insight is desired.

Based on these guidelines two qualitative questionnaires have been designed, one aiming to gather insight into the sample demographic, the other aiming to gain insight into the participants' impressions about the realism of the experiment setup, the level of comfort, or discomfort and any suggestions or comments they might have.

6.3.4 Participants' Demographic

6.3.5 Participants' Insight

6.4 Procedure

In order to evaluate the effectiveness of the system a user study took place. Participants were split randomly into two groups. One group will be referred as the feedback group, the other will be referred to as the base group. The experiments structure was subdivided into smaller systemic tasks.

Demographic questionnaire At the start on the experiment the demographic questionnaire is to be handed out to the participant.

Adjust Rig Configuration In order for the participant to sit comfortable while also ensuring all controls can be reached with ease, the rig has to be configured per participant. This involves having to move the seat further back or forward to the steering wheel, as it would be done in a real car. In addition participants are also told how to operating the rig.

The explanation covers the steering wheel turns two and a half turns from lock to lock, the pedals are setup as on any manual road car, having the clutch pedal on the left, brake in the middle, and throttle on the right. The H shifter is also explained by having a run through demonstration of all gears which allows participants to be able to operate the rig with out having to learn on their own.

Breaks To avoid having driving sessions possibly put too much strain on participants, optional five minute breaks are allowed to be taken between driving sessions.

Ten minuties practice During these ten minutes users are told to simply get used to the rig setup, track and car. The aim of this session is for participants to get used to the setup while also allow this study to measure their skill before the feedback system as the independent variable is introduced.

Two Ten minuties sessions These are the sessions in which the feedback system is turned on for the feedback group, while the participants in base group are left to keep trying to improve without any aid.

Five minuties session A final five minuties of driving are allocated yet again, this time with the feedback system turned of for both groups. This was designed to possibly identify any conclusive results. Such session could show the possibility of the feedback group performing worst after having the aid of the feedback system removed or both groups ending up performing the same after the sessions, which would suggest the feedback participant didn't manage to get any cognitive advantage.

Participant's feedback questionnaire The final stage of the experiment requires participants to fill in the a questionnaire in which they are asked to give their feedback on the experiment structure, hardware used and any further comments they would like to add.

6.5 Data Collection and Sampling

At the end of the experiments the data collected includes two questioners from each participant and four batches of telemetry data, one for each participant. Questioners are filled online using Google Forms as it provides the ability to export the data and also automatic generation of descriptive statistic. The data collected from the questionnaires and telemetry data is to be loaded into a data base management system from which the data can be queried using specialised data querying constructs. By having a querying language, it provides the flexibility of extract data which is relevant for the data analysis at hand.

6.6 Data Analysis

In order to accept or reject the null hypothesis statistical test are to be carried out. Most important is the ability to compare the performance of the two groups across sessions. The lap time is used as the test variable as this gives a good indication for the average performance achieved during a lap. Furthermore which comparison test to use depends on the the sample size, the distribution of data and the types of group. In this case the groups are independent from each other, as a participant may not be part of the base group and also part of the feedback group. As pointed out by De Smith in his book "Statistical Analysis Handbook-a web-based statistics" the tests of interest to this project are the Independent samples t-test [7] and the Mann Whitney U test [7] as the these test for difference between independent groups. Both tests share the same hypothesis listed below.

Independent t test assumes the data is normally as such the data must be check for normal distribution. This can be carried out by using the Shapiro-Wilk [7] test for normality on both groups.

Mann Whitney U test Does not require the data to be normally distributed but it assumes the groups' data shares the same distribution. The groups are checked for equal distribution using the Independent Samples Kolmogorow-

Smimov test.

Null hypotesis there is no significant difference across the groups

Alternative hypotesis there is significant difference across the groups

As the data distribution is not known before hand, distribution test will be carried out after the data is collected and depending on the result, the adequate test will be used.

7 Design and Implementation

In this chapter an in detail description is given for the software and hardware which has been implemented. Starting with § 7.1 section which gives an overview of the most important requirements the software artefact should meet. § 7.2 covers tools which have been developed in order to aid the use of the feedback system. Finlay the § 7.3 section gives an indept description of the inner workings of the feedback system and how components integrate with each other.

7.1 Requirements

The the feedback system is broken down into the following basic requirements.

Abstract Input / Output Interface The telemetry data input and feedback output needs to be abstracted. Techniclay this does not effect the feedback's effectiveness or accuracy but it is usefull as to be able to change the sim racing game and the type of feedback which is given with out having to change any of the internal components. This allows for fast prototyping especially with the output interface in which one can develop another way to convey the feedback.

Perform Spatial Querying The feedback system relies on being able to determine the location of the car on track. This is used to determine if the car is in a straight section or corner section, how far away from the race line the car is and if the mid point of the corner is being driven on.

Store telemetry files In order for the evaluation chapter to be carried out, the telemetry data is required to be stored for later data analysis. This is achieved by writing the telemetry data to a log file which is later uploaded to the database.

Query log files

7.1.1 Sim Racing Rig

The rig is made out of various independent components. The steering wheel is a Logitech G25 a pedal set, an H shifter and a bucket racing seat, all mounted on to a home made metal frame.



Figure 7: Side view of the racing rig

7.2 Supporting tools

In order to aid the feedback system, special tools have been developed in order to generate file which are required to make the feedback system work with a specific track

7.2.1 Track Splicer

The track splicer tool has been developed to aid the feedback system's track meta data file creation. It automates the following tasks. Given a series of two dimensional cartesian coordinate denoting a track race line, (i) split the race line into straights and corners (ii) find the mid point of a corner which is used as the apex point and (iii) give a visual representation of the race line, straights and corners.

Split the race line into straights and corners This is done by calculating the rate of change of the line by means of vectors dot products. A cartesian

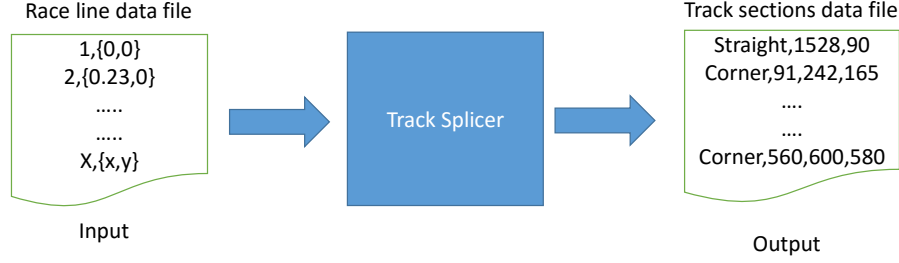


Figure 8: Track splicer input and output

coordinate $p[x]$ as 'p1' is considered where x is the position in the array. Two other points are required $p[x+1]$ as 'p2' and $p[x+2]$ as 'p3'. When x is the end of the list, the first two points are used from the list. Using $p1$, $p2$ and $p3$, two vectors are generated, 'v1' which is a vector going from $p1$ to $p2$, and 'v2' which is a vector going from $p2$ to $p3$. The vectors are normalised as their magnitude is irrelevant for this computation. The dot product of $v1$ and $v2$ is computed, the result is passed through the arccos function which results in the angle difference. If the angle is above a threshold value the point $p1$ is said to be part of a corner section, otherwise $p1$ is said to be part of a straight. The threshold value is customizable and is fine tuned on a track by track bases.

Find the mid point of a corner The mid point of a corner is the highest point of the corner as shown in the figure. The mid point is found by going through each point. A perpendicular vector 'vP' to the first point is calculated, then a vector list vL is created containing a vector for each point as such $v[x] = \text{vector}(p[x].x, p[x].y)$ where x is the position of the point in the array. Finally each vector in vL has the dot product with VP computed. The vector with the highest dot product result corresponds with the point which is the mid point of the corner.

Visual representation of the race line It was important to be able to visualise the results of the above processes in order to be able to determine

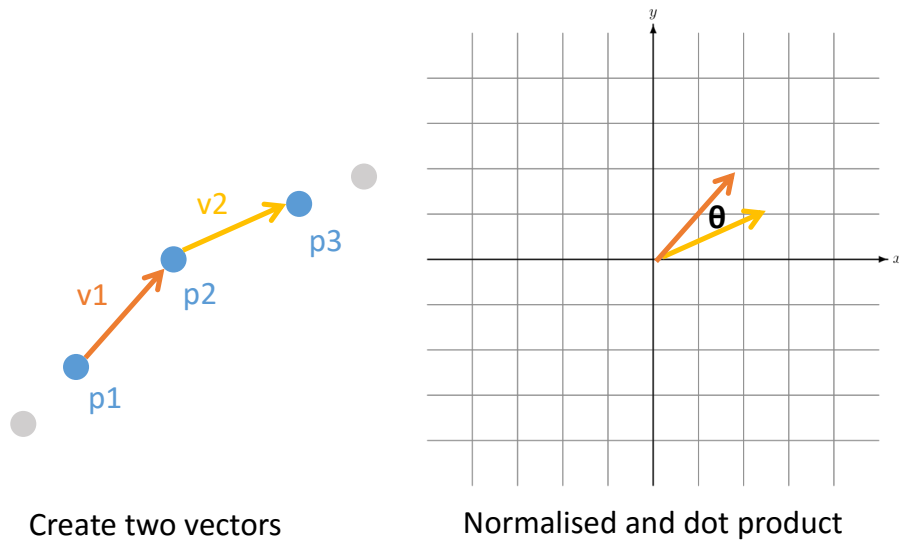


Figure 9: Points and vectors visualised

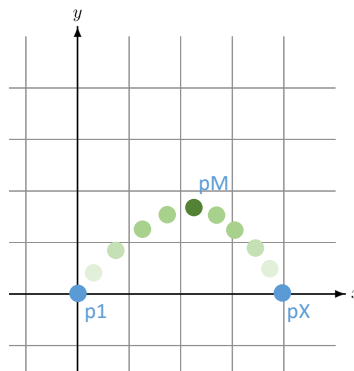


Figure 10: Finding the corner mid point
 p_1 : First point p_M : Corner mid point p_X : Last point

the correctness of the processes. For this reasons an application with a graphic user interface was developed from which one can see the results.

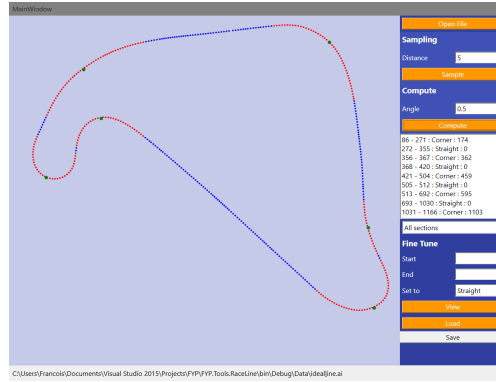


Figure 11: Track splicer tool
Blue dots : Part of a straight **Red dots** : Part of a corner **Green dots** :
 Corner mid point

7.2.2 Log files Data Store

Telemetry data log files from each sessions was inserted into a database management system by means of an extraction transfer loading processes. The process took a log file as an input and inserted the records into a table. By using a database management system it was possible to be able to store and query large amount of data in an efficient way. At first Microsoft Excel was being used however there were too many records to be stored in one sheet, further more the excel is not flexible enough to perform the same query operations which are possible with a structured query language.




Figure 12: Microsoft Integration Services SQL import

7.2.3 Spatial Querying

Spatial querying operations are supported by means of a quad tree data structure. Searching in a quad tree is take place in $O(\log n)$ which is a big improvement over a simple liner search which would be done in $O(n)$. Furthermore quad

tress are easily implemented and work well with two dimensional coordinates.

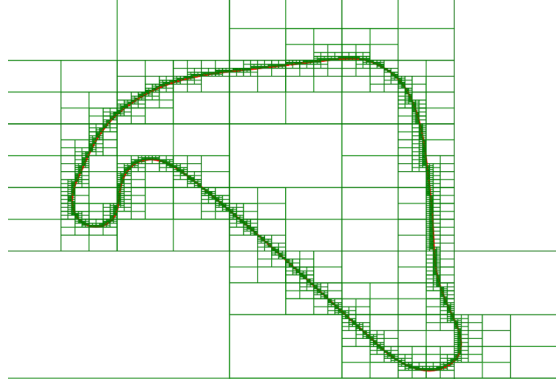


Figure 13: Visual representation for part of the quad tree for the Silverstone national circuit

7.3 System Architecture

The feedback system is made up of independent components which pass data to each other in order to produce the feedback instruction which is output to the user. Below is the break down of each component including an overview of their inner workings.

7.3.1 Telemetry Input Interface

This components handles data inputs, two type of inputs are required, static and real time inputs. The static inputs are the ones which have been previously generated by the supporting tools. Real time input refers to the telemetry generated from the sim racing game. Assetto corsa provides a UDP server which a client can connect to, once the connection is established the game will send telemetry data.

7.3.2 Processing

Feedback processing is split into sub modules. Each module runs on a separate independent thread and gets a copy of the telemetry data passed in real time as it

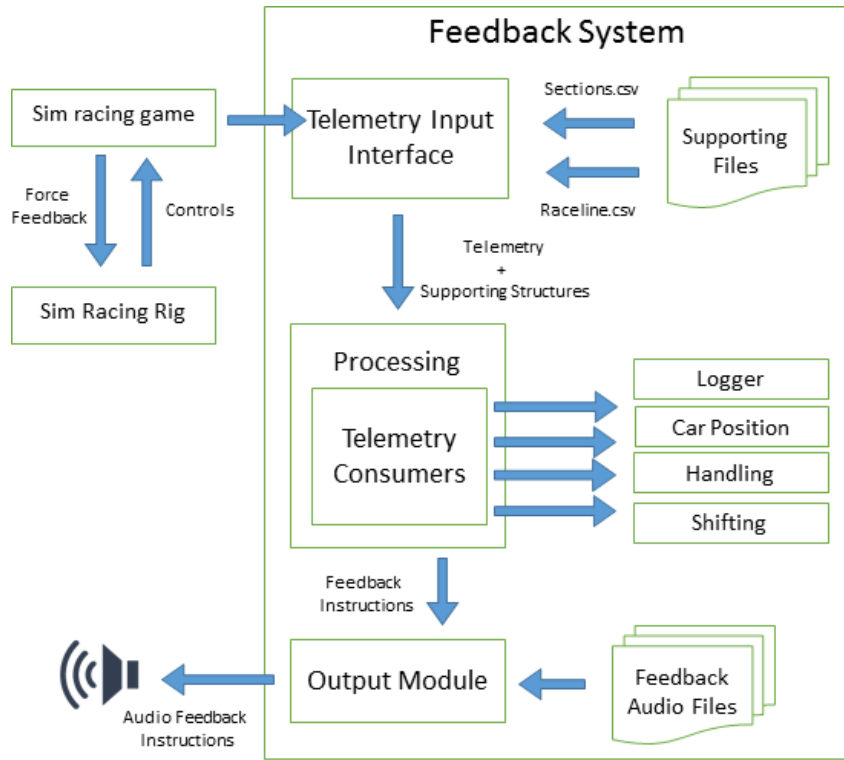


Figure 14: Overview of the system architecture components

becomes available. Modules can be developed and plugged in without changing any other components. Having each module run on a dedicated thread ensures the system can scale horizontally making use of all the available cores without hindering the feedback system's responsiveness. The processing component acts as a coordinator by passing data to sub-modules, and listening to any feedback notification raised which are forwarded to the output interface.

Optimisation is also carried out within this component. This is achieved by filtering out by an expert system the feedback before being propagated to the output module. The knowledge base of the expert system is a hand-crafted static one, based on rules and facts derived from the Background chapter. The inference engine works in a tiered skill-based manner. At first, only instructions from the basic tier are given. After the user manages to improve the basic tier

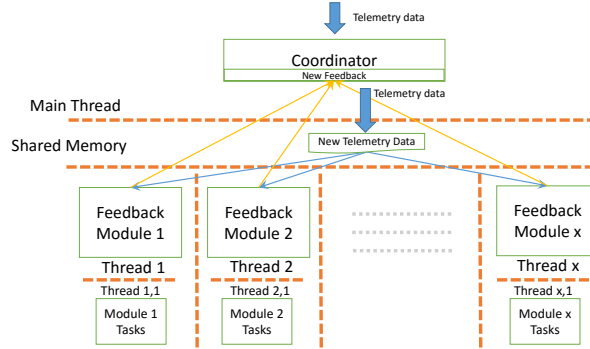


Figure 15: Overview of the coordination threading

skills, feedback instructions for the next tier are allowed pass to the output. In addition each module has a tolerance associated to each feedback notification it can provide. This allows the expert system to adjust how strict a module should be in raising a notification and be able to gradually make the system stricter as the user improves.

7.3.3 Feedbacks being provided

In this sub section an overview of all implemented feedback modules is given.

Handling component monitors for braking and acceleration behaviours. It is able to raise the following feedback notifications,

- Braking too hard
- Braking too light
- Braking in corner
- Losing traction to the drive wheels by applying too much power

Car Position component monitors for any issues which might cause the user to not adhere to the race line. As such this module can raise the following notifications

- Incorrect race line during corner
- Being too aggressive during a corner
- Not slow during a corner
- Track section report

Shifting component monitors how the user is changing gears, which allows it to raise the following notifications

- Changing gear to soon
- Changing gear to late
- Taking too long to transition from one gear to another

7.3.4 Output Interface

Each possible feedback instruction which can be generated by the processing module has a static audio file associated to it. The audio files are generated from a free on line text to speech tool. The purpose of this component is to listen for feedback instruction generated by the processing component and play the corresponding audio file.

8 Evaluation

This chapter provides an insight into the data collected from the questionnaires and the feedback system logs while also explaining results derived from statistical tests. The chapter is structured as follows: § 8.1 provides an overview of the demographic background for the sampled participants. § 8.2 covers tests which check the data sets distribution moving on to compare the distribution across the feedback group and base group. § 8.3 goes through determining any difference between the two groups which might have been caused by the introduction of the feedback system. § 8.4 covers the participants' impressions on the experiment and finally conclusive results from this study are presented in § 8.5

8.1 Demographic of The Sample

The following demographic data was drawn out from the pre study survey. Participants were mostly in their early twenties and mostly males. Out of 27 participants, 2 didn't have a driving license and 25 had a driving license with most of them having been driving for a year. Furthermore 22 participants identified themselves as playing video games, from which 18 participants stated they have played racing video games. The majority of participants who play racing games identified themselves as playing mostly arcade sim racing games, while only 3 play sim racing games. Out of the 27 participants, 7 participants have previously used a racing rig.

8.2 Distribution Tests

From the lap times box plot, one can notice a trend in which lap times improve the more time they use the rig, irrespective of the group assignment. It's worth pointing out the median of the feedback group is lower than the base group's median, except during the last session in which the medians are close to each other. Moreover the participants in the feedback group seem to be less consistent in their lap times as the box plot whiskers and quartiles are more spread out

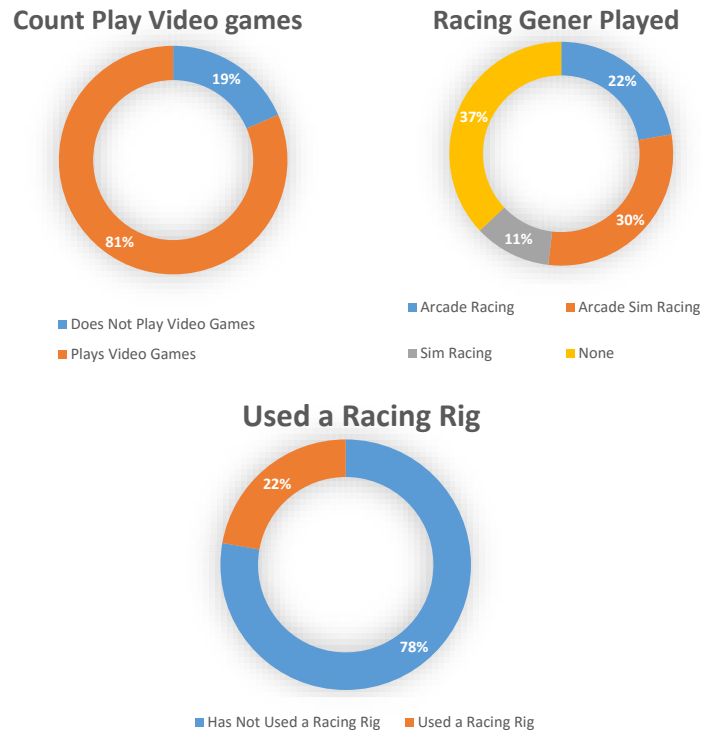


Figure 16: Video games experience

then the ones from the base group.

Carrying out Shapiro-Wilk test for normality for the feedback group and base group during the first session on their respective lap times it was found that the data is not normally distributed as the p-value for both groups is below 0.05 resulting in rejecting the null hypothesis stating the samples come from a normal distribution

The same data was checked for similar distribution across groups using the Independent Samples Kolmogorow-Smimov Test which resulted in accepting the null hypothesis stating the groups' lap times share the same distribution.

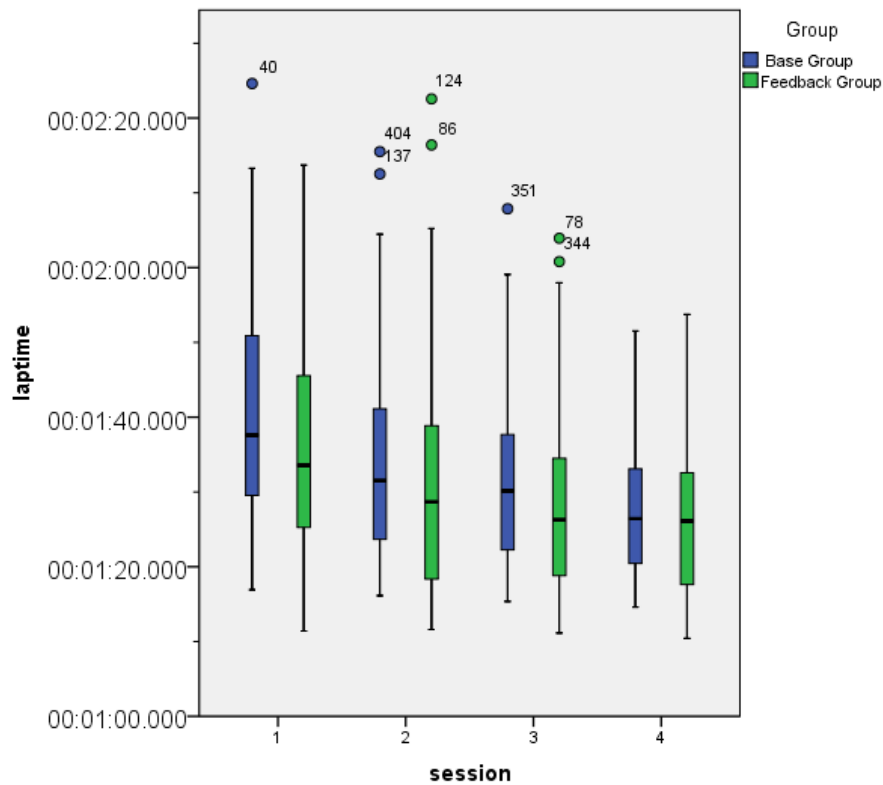


Figure 17: Lap times vs session, clustered by group

Tests of Normality						
Group	Kolmogorov-Smirnov ^a			Shapiro-Wilk		
	Statistic	df	Sig.	Statistic	df	Sig.
LapTime Base Gro	.108	70	.042	.955	70	.013
Feedback	.074	81	.200*	.963	81	.020

*. This is a lower bound of the true significance.

a. Lilliefors Significance Correction

Figure 18: Shapiro Wilk test results

8.3 Feedback System Results

Having established both groups' lap times share the same distribution during the first session the Mann-Whitney Test to determine any differences between the groups before the feedback system is introduced. The test results show a

Hypothesis Test Summary				
	Null Hypothesis	Test	Sig.	Decision
1	The distribution of LapTime is the same across categories of Group.	Independent-Samples Kolmogorov-Smirnov Test	.360	Retain the null hypothesis.

Asymptotic significances are displayed. The significance level is .05.

Figure 19: Kolmogorow Smimov test result

p value of 0.057 resulting in no statistical difference between the groups at the start of the sessions.

Ranks			
Group	N	Mean Rank	Sum of Ranks
LapTime 0	70	83.29	5830.50
1	81	69.70	5645.50
Total	151		

Test Statistics ^a	
	LapTime
Mann-Whitney U	2324.500
Wilcoxon W	5645.500
Z	-1.905
Asymp. Sig. (2-tailed)	.057

a. Grouping Variable:

0

Figure 20: Mann-Whitney test result

Running the Mann-Whitney test on the remaining sessions, results show there is no significant difference between the two groups even after the feedback

system was introduced to one group. The third session tells a different story as the p value is 0.029 which results in accepting the null hypothesis. The fourth and final sessions is the one which both groups had the feedback system turned off which resulted in the difference between the groups to yet again show no statistical significant difference.

Mann-Whitney Test

	LapTime		
	2nd Session	3rd Session	4th Session
Mann-Whitney U	2662.000	2718.000	754.000
Wilcoxon W	6317.000	6634.000	1657.000
Z	-1.923	-2.188	-.614
Asymp. Sig. (2-tailed)	.054	.029	.539

a. Grouping Variable: Group

Null hypothesis

There is a sig difference

Alternative hypothesis

There is no sig difference

Figure 21: Mann-Whitney test result for the last the sessions

8.4 Users' Feedback

Users reported an overall good experience, the rig setup was found to be realistic and easy to use. An overwhelming majority of the participants reported having issues mastering the s-bend part of the track, however, they reported that the car and track choice was an adequate one. When the feedback group was asked about the feedback system, they reported to be intelligible, accurate, helpful and somewhat easy to apply the feedback given. Lastly, when asked about if they thought the feedback was intrusive, possibly distracting them, out of 15, 5 reported it to be intrusive.

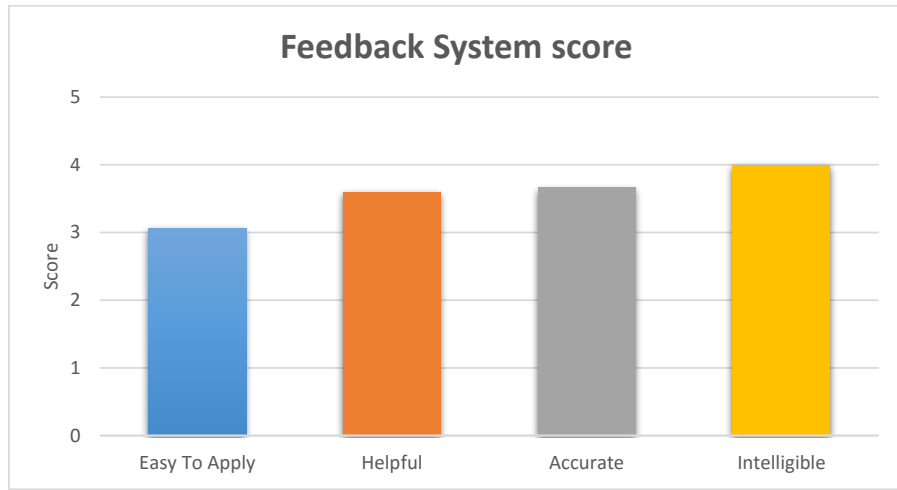


Figure 22: Users' Feedback

8.5 Discussion

From the post experiment questionnaire one can note that rig setup has been well received, with users enjoying the experiments while also given it a high score for its sense of realism. This suggests that by using off the shelf entry level hardware for the sim racing rig, it is possible to achieve a good level of realism. The feedback system shows to have potential. The groups start at the same skill level. Both groups show a noticeable improvement from one session to the next session, excluding the last session in which it seems the shorter session might have put extra pressure on the participants' hindering their performance. Furthermore, there was no statistical difference during the second session, but during the third session there was. The fact that the feedback group had a lower average lap time suggests the group managed to get used to the feedback system after the second session and start to follow the feedback instructions during the third session. Lastly, the sample is too small to test for correlation between gaming experience and lap times, as only two players have played sim racing games while the other gamers don't play enough racing games. Same goes for correlation between having a driving licence and being able to use the rig,

as only two unlicensed participants took part, both of which are in the process of obtaining their driving license.

[Will add ref to charts in the appendix]

9 Conclusion

The Conclusions section should be a summary of the project and a restatement of its main results, i.e. what has been learnt and what it has achieved. An effective set of conclusions should not introduce new material. Instead it should draw out, summarise, combine and reiterate the main points that have been made in the body of the dissertation and present opinions based on them.

10 Future Work

Having the feedback system control an AI car. More data analysis Observer the user for mistakes such as not keeping both hands on the wheel resting the hand on the shifter and not looking into a corner.

Teach users in the sim, have them drive in real life.

Whether by the end of the project all the original aims and objectives have been completed or not, there is always scope for future work. Also the ideas will have grown during the course of the project beyond what the student could hope to do in the time available. The Future Work section is for expressing these unrealised ideas. It is a way of recording 'I have thought about this'. A good Future Work section should provide a starting point for someone else to continue the work which has been done.

Have the expert system go also back a tier if the user is going backwards, not just forward

At present only negative feedback is given, a good idea would be to look into the benefits of letting the user know when a particular task has been completed correctly.

11 Charts

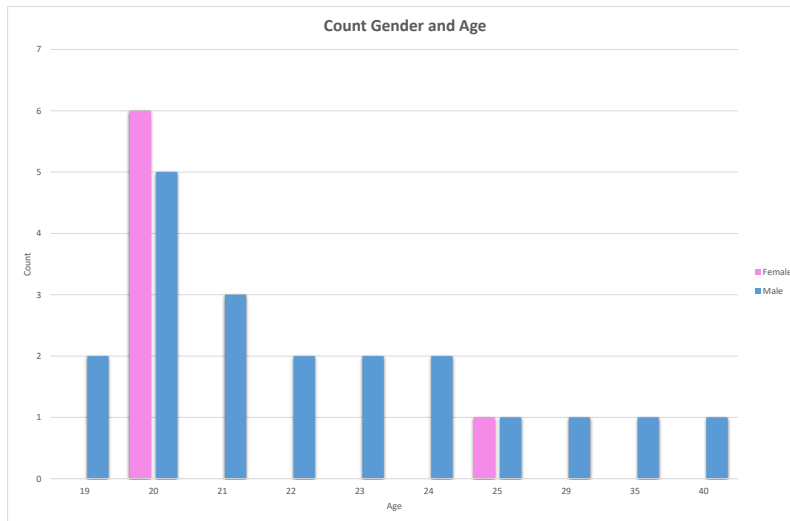


Figure 23: Count Participants' gender and age

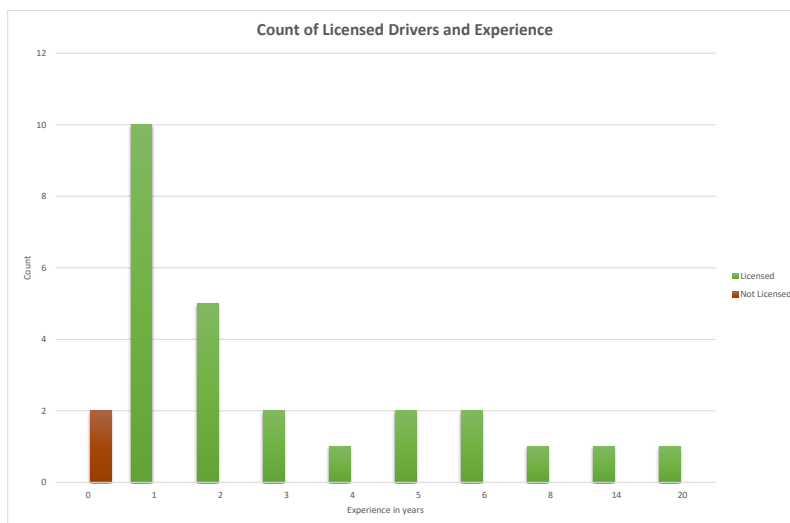


Figure 24: Licensed drivers and experience

Transcript of the audio files

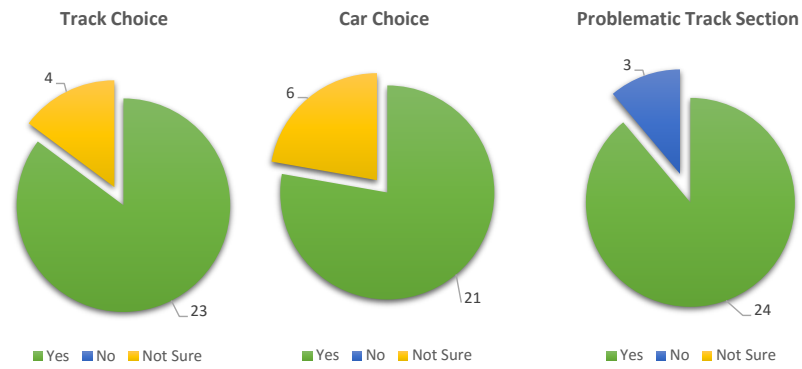


Figure 25: Where the track and car choice adequet?

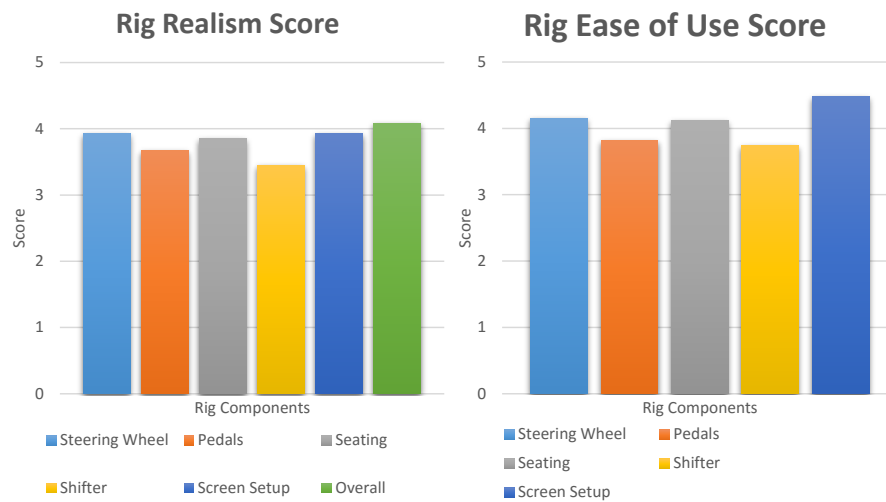


Figure 26: How real do these componets feel?

Was feedback intrusive?

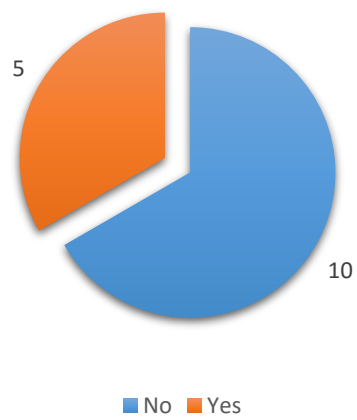


Figure 27: Was the feedback intrusive?

References

- [1] <http://www.assettocorsa.net/en/>.
- [2] <http://www.projectcarsgame.com/>.
- [3] Telemetry: Summary of concept and rationale. *NASA STI/Recon Technical Report N*, 89, December 1987.
- [4] Clark C. Abt. *Serious Games*. Viking Press, 1970.
- [5] Donald Bastow, Geoffrey Howard, and John P Whitehead. *Car suspension and handling*. SAE international Warrendale, 2004.
- [6] Brian Beckman and No Bucks Racing Club. The physics of racing, part 5: Introduction to the racing line. *online*] <http://www.esbconsult.com.au/ogden/locust/phors/phors05.htm>, 1991.
- [7] MJ De Smith. Statsref: Statistical analysis handbook-a web-based statistics.”. 2015.
- [8] Damien Djaouti, Julian Alvarez, and Jean-Pierre Jessel. Classifying serious games: the g/p/s model. *Handbook of research on improving learning and motivation through educational games: Multidisciplinary approaches*, pages 118–136, 2011.
- [9] Simon Egenfeldt-Nielsen. *Beyond edutainment: Exploring the educational potential of computer games*. Lulu. com, 2005.
- [10] Johan Engström, Emma Johansson, and Joakim Östlund. Effects of visual and cognitive load in real and simulated motorway driving. *Transportation Research Part F: Traffic Psychology and Behaviour*, 8(2):97–120, 2005.
- [11] Casper Hartevelt, Rui Guimarães, Igor Mayer, and Rafael Bidarra. *Technologies for E-Learning and Digital Entertainment: Second International Conference, Edutainment 2007, Hong Kong, China, June 11-13, 2007. Proceedings*, chapter Balancing Pedagogy, Game and Reality Components

- Within a Unique Serious Game for Training Levee Inspection, pages 128–139. Springer Berlin Heidelberg, Berlin, Heidelberg, 2007.
- [12] Bob Knox. A practical guide to race car data analysis”. 2011.
 - [13] Wayne Leahy, Paul Chandler, and John Sweller. When auditory presentations should and should not be a component of multimedia instruction. *Applied Cognitive Psychology*, 17(4):401–418, 2003.
 - [14] Mark R. Leary. *Introduction to Behavioral Research Methods, 2nd Edition*. Cole Publishing Company, 2001.
 - [15] Qing Li. Can driving in games translate to driving in real life? a study of game based traffic education. *Developments in Business Simulation and Experiential Learning*, 42, 2015.
 - [16] Rensis Likert. A technique for the measurement of attitudes. *Archives of psychology*, 1932.
 - [17] C. Lopez and D. Sullivan. *Going faster!: mastering the art of race driving*. Bentley Publishers, 2001.
 - [18] David R Michael and Sandra L Chen. *Serious games: Games that educate, train, and inform*. Muska & Lipman/Premier-Trade, 2005.
 - [19] Robert Breck Moser. A methodology for the design of educational computer adventure games. 2002.
 - [20] H.B. Pacejka and Society of Automotive Engineers. *Tire and Vehicle Dynamics*. SAE-R. SAE International, 2006.
 - [21] R. Stanton. *A Brief History Of Video Games: From Atari to Xbox One*. Little, Brown Book Group, 2015.
 - [22] Jennifer J Vogel, David S Vogel, Jan Cannon-Bowers, Clint A Bowers, Kathryn Muse, and Michelle Wright. Computer gaming and interactive simulations for learning: A meta-analysis. *Journal of Educational Computing Research*, 34(3):229–243, 2006.

- [23] Chien Yu, Jeng-Yang Wu, and Aliesha Johnson. Serious games: Issues and challenges for teaching and training.
- [24] Michael Zyda. From visual simulation to virtual reality to games. *Computer*, 38(9):25–32, 2005.