



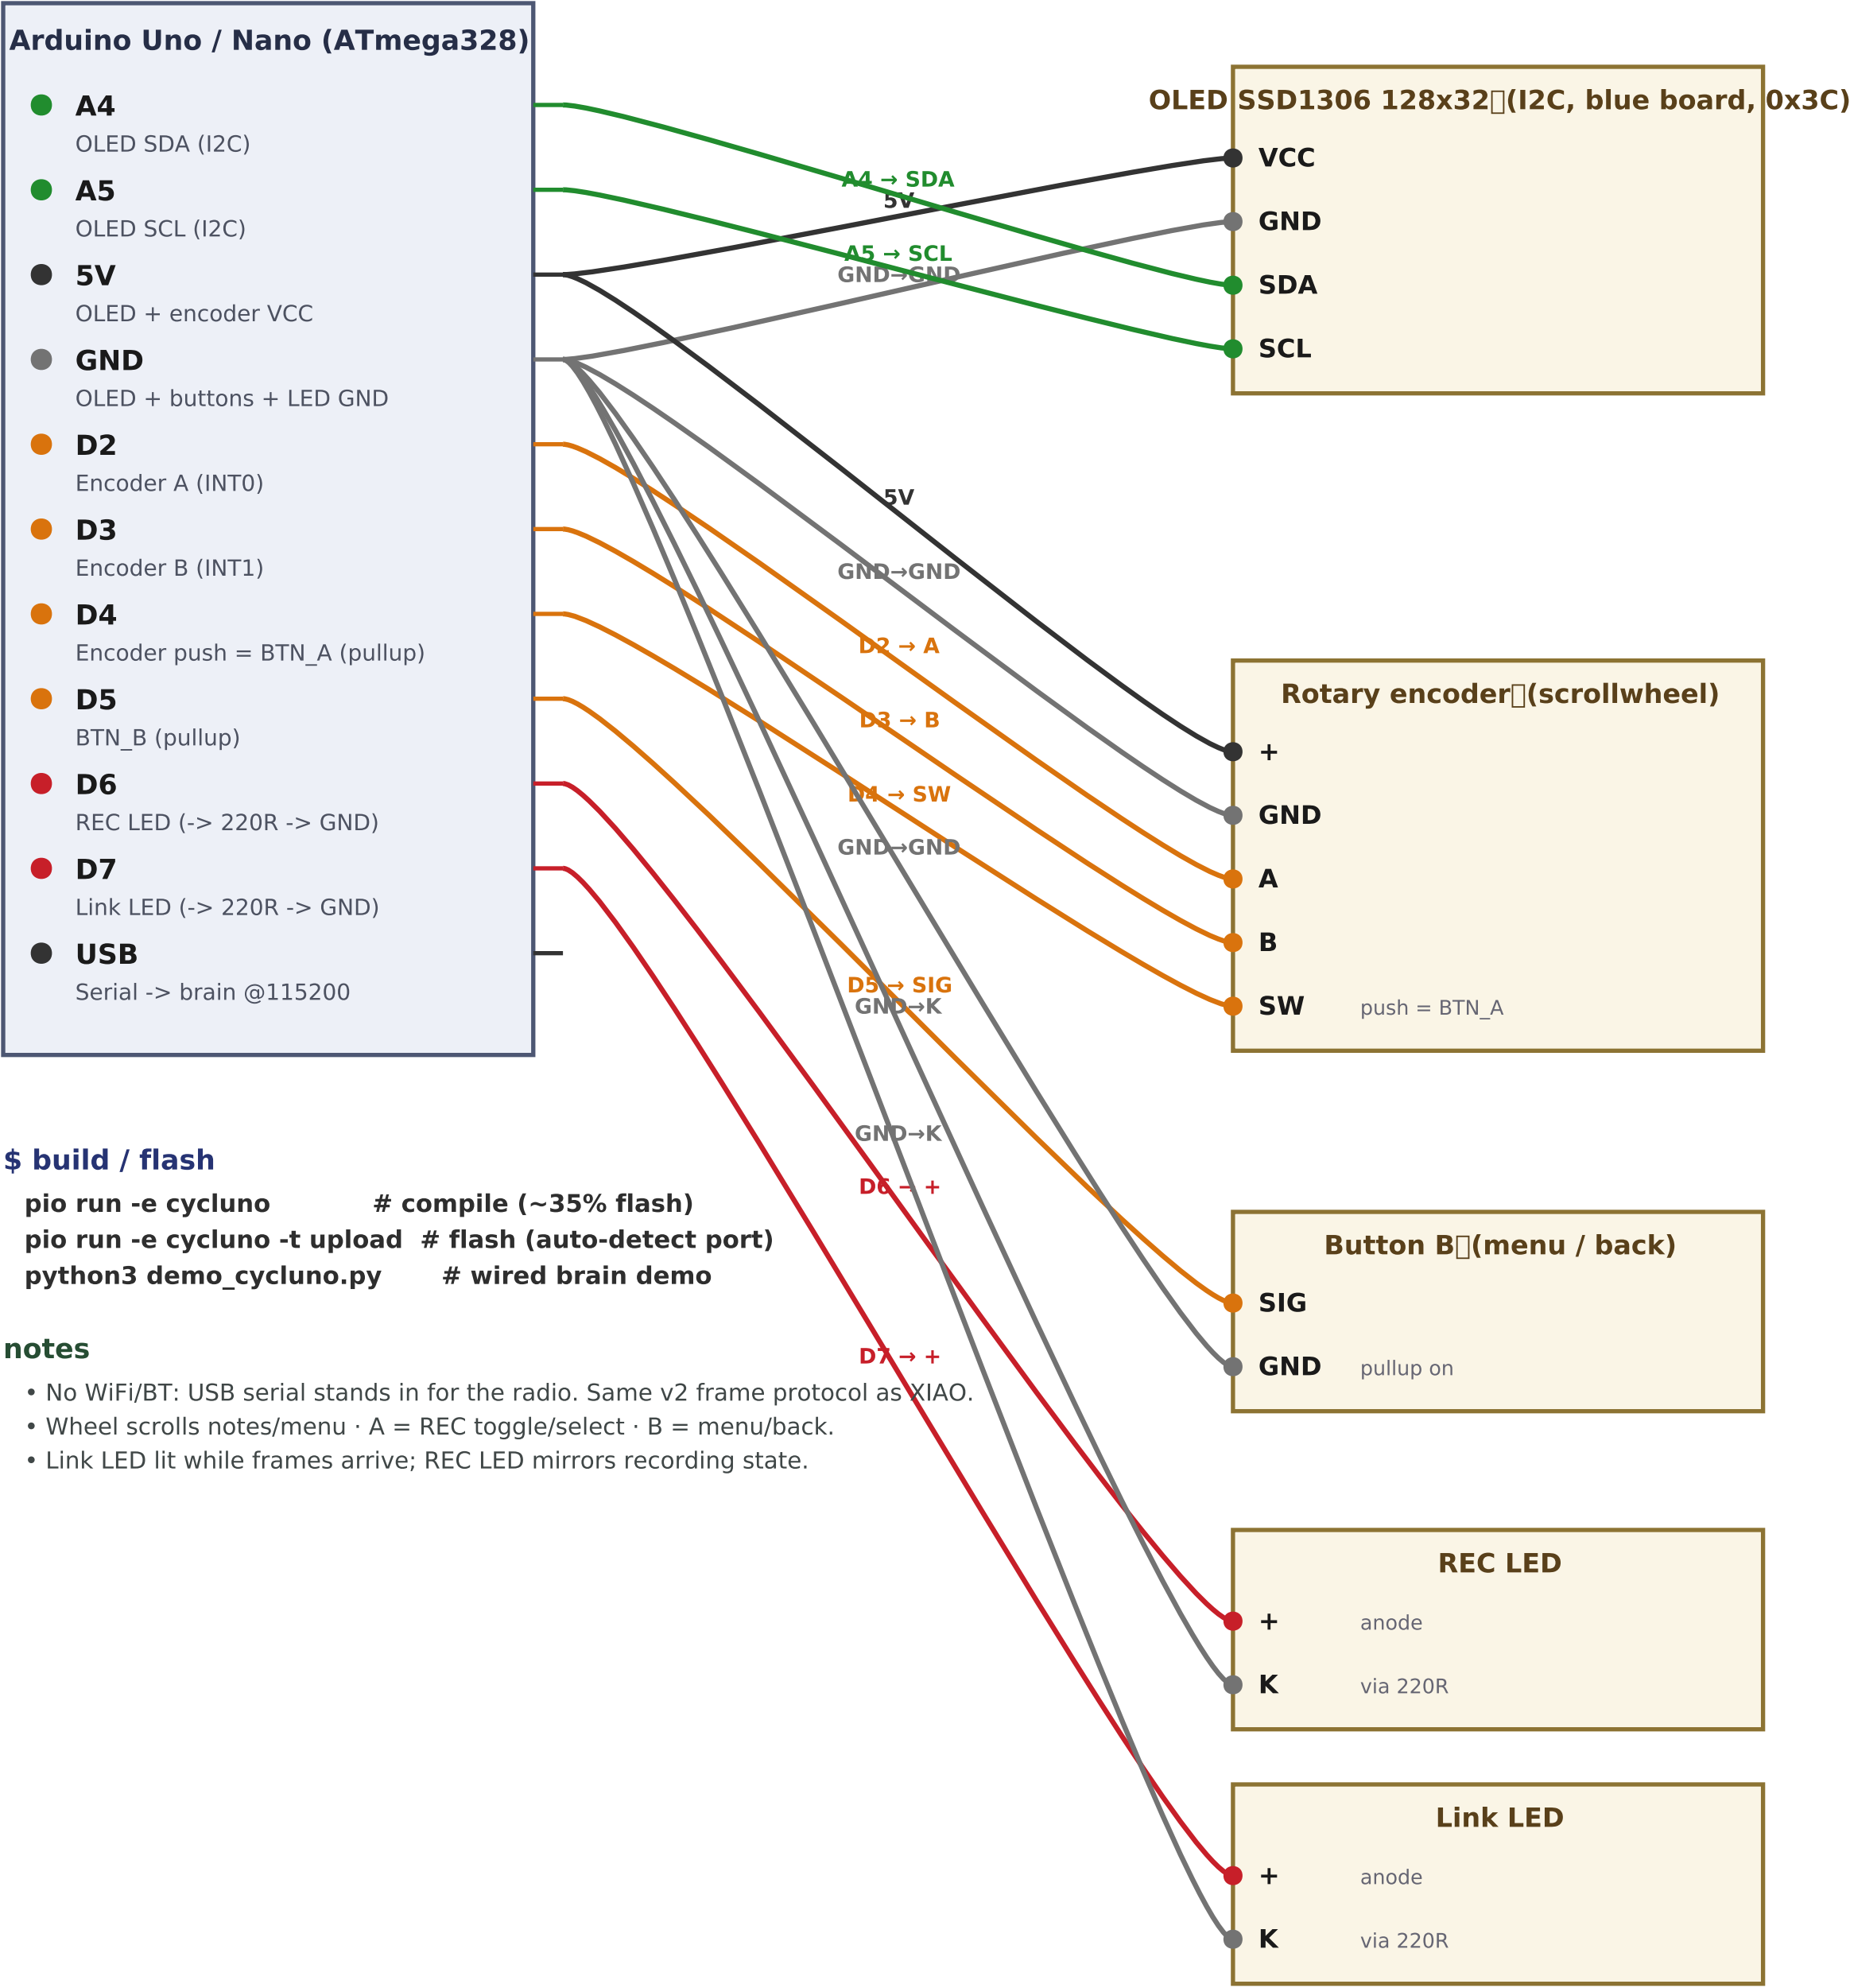

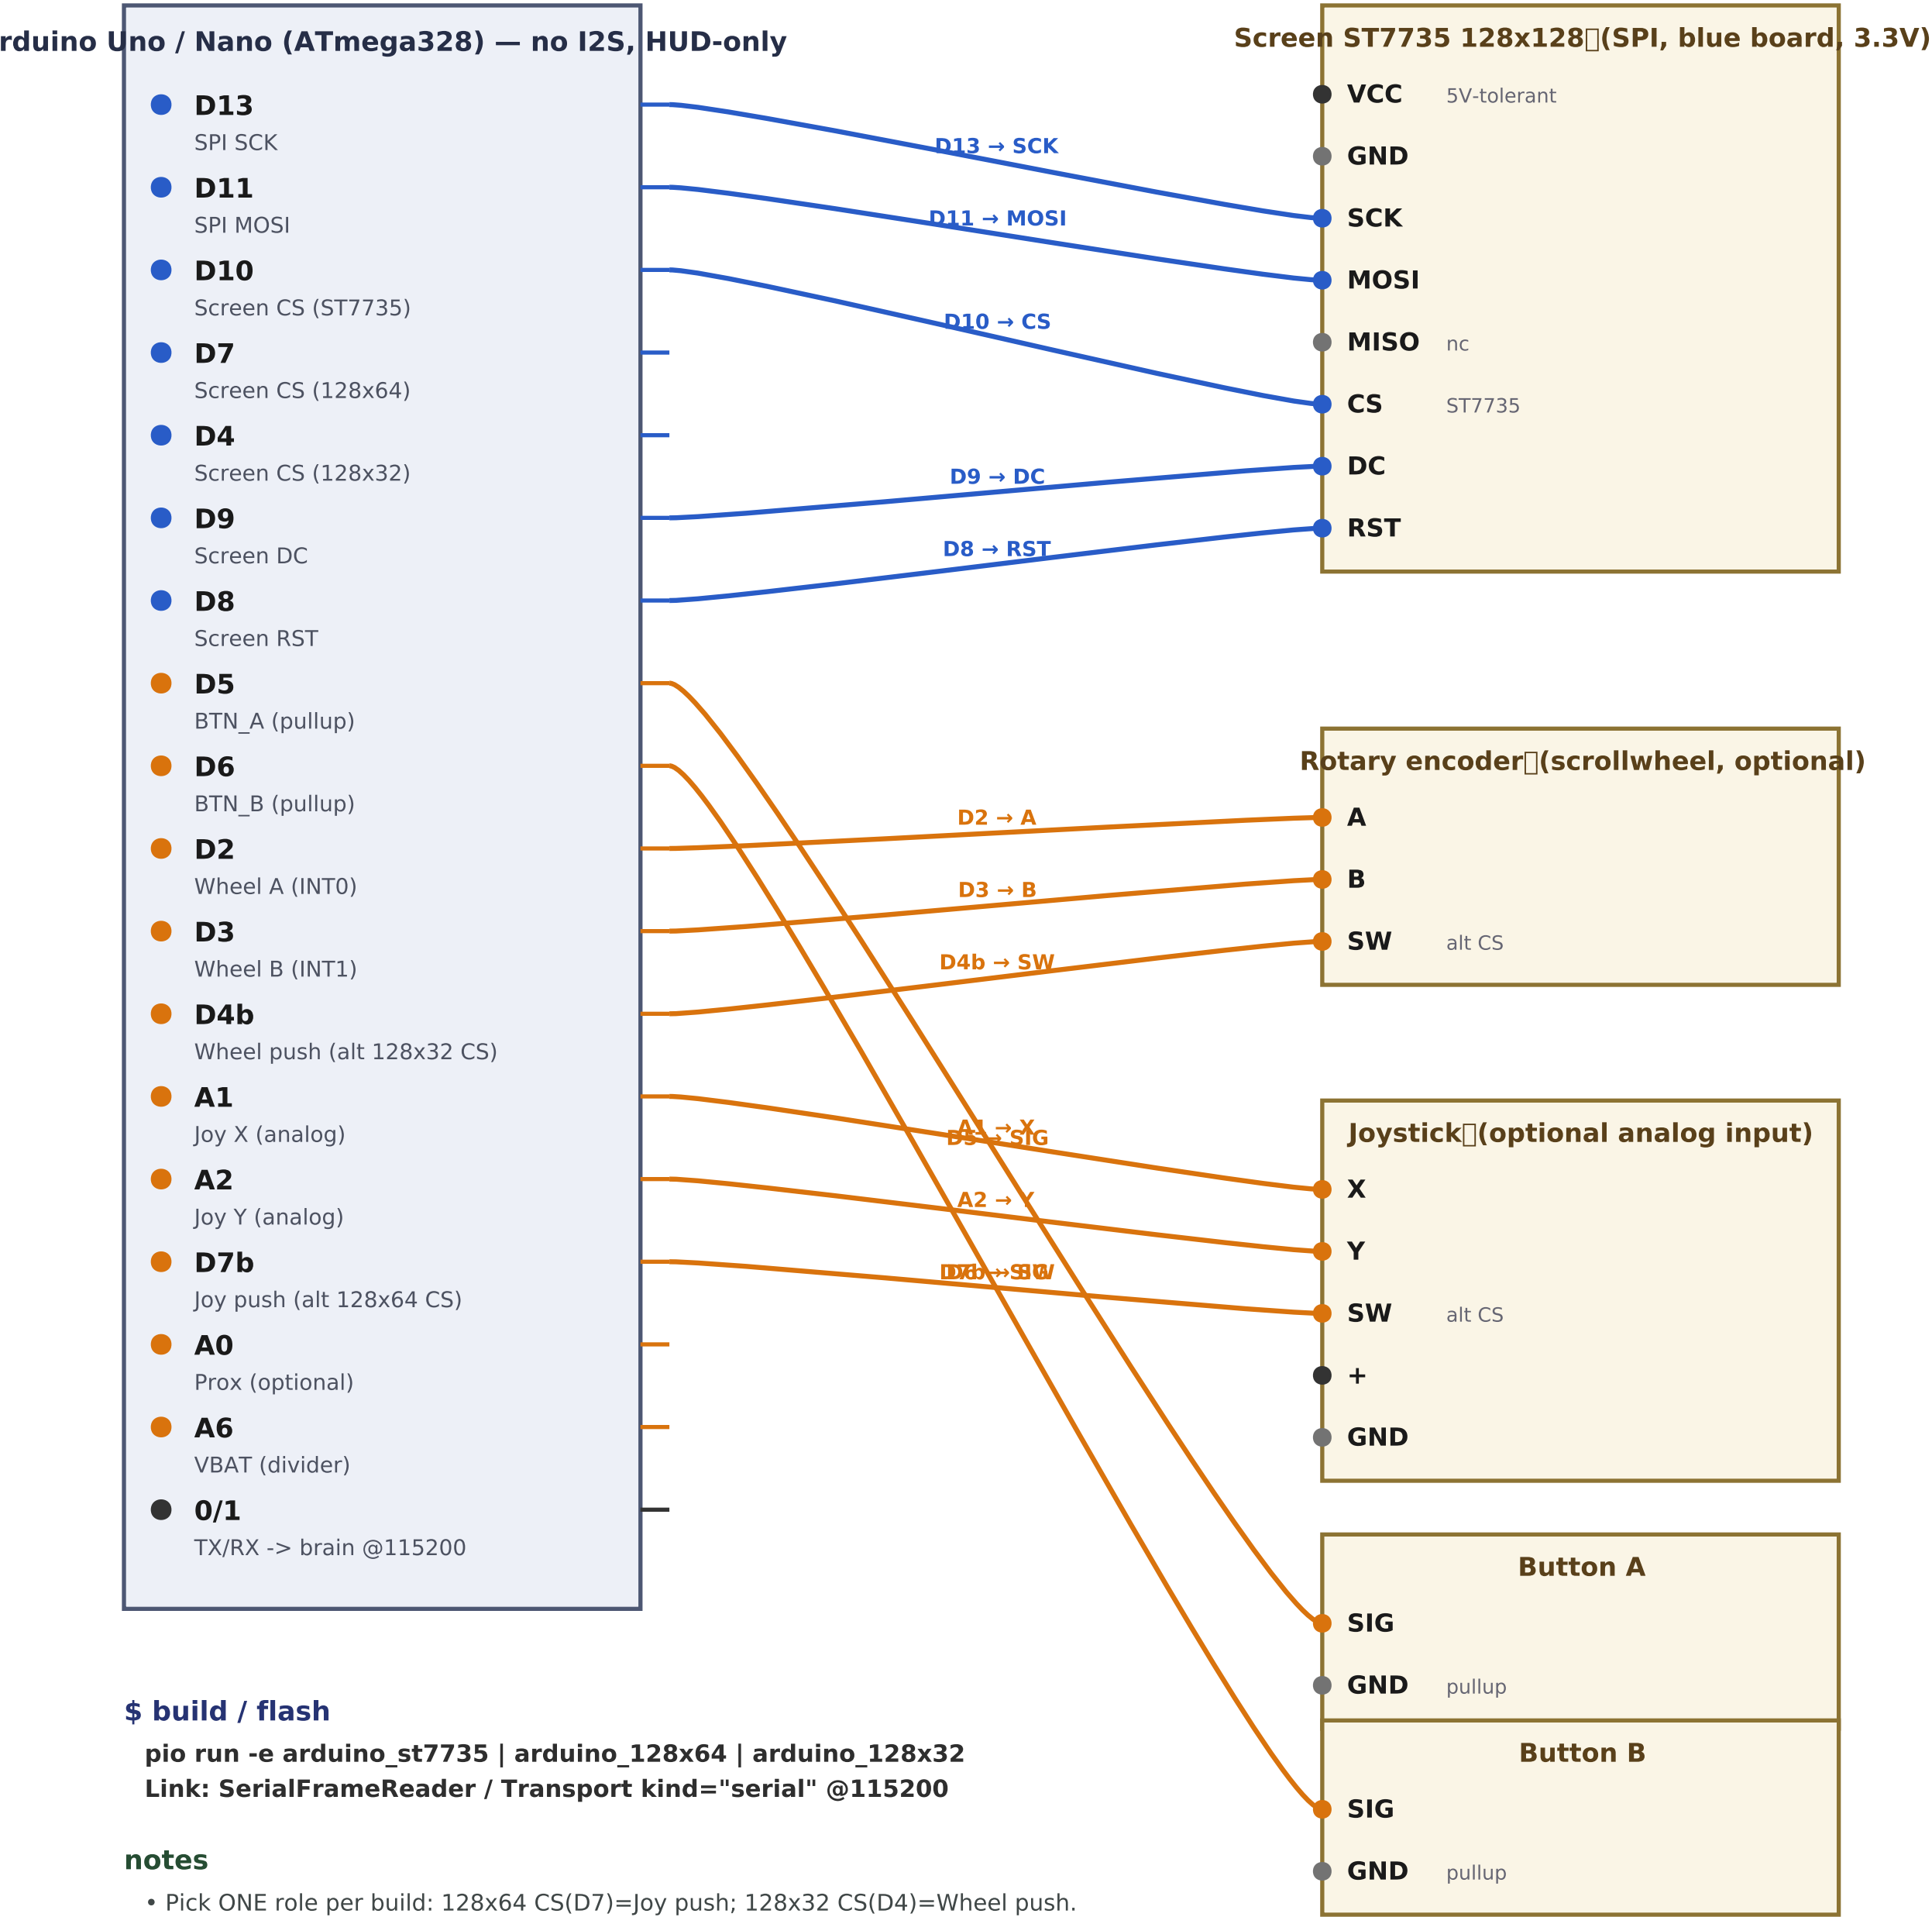

D13 → SCK

D11 → MOSI

D10 → CS

D9 → DC

D8 → RST

D2 → A

D3 → B

D4b → SW

A1 → X

A2 → Y

D7b → SW


A0 → SIG

A6 → SIG

V3 XIAO ESP32-S3 Sense — wearable

Cyclops wiring

I2C SSD1306 128x32 (blue board, 0x3C) · scrollwheel + 2 buttons · onboard mic + SD

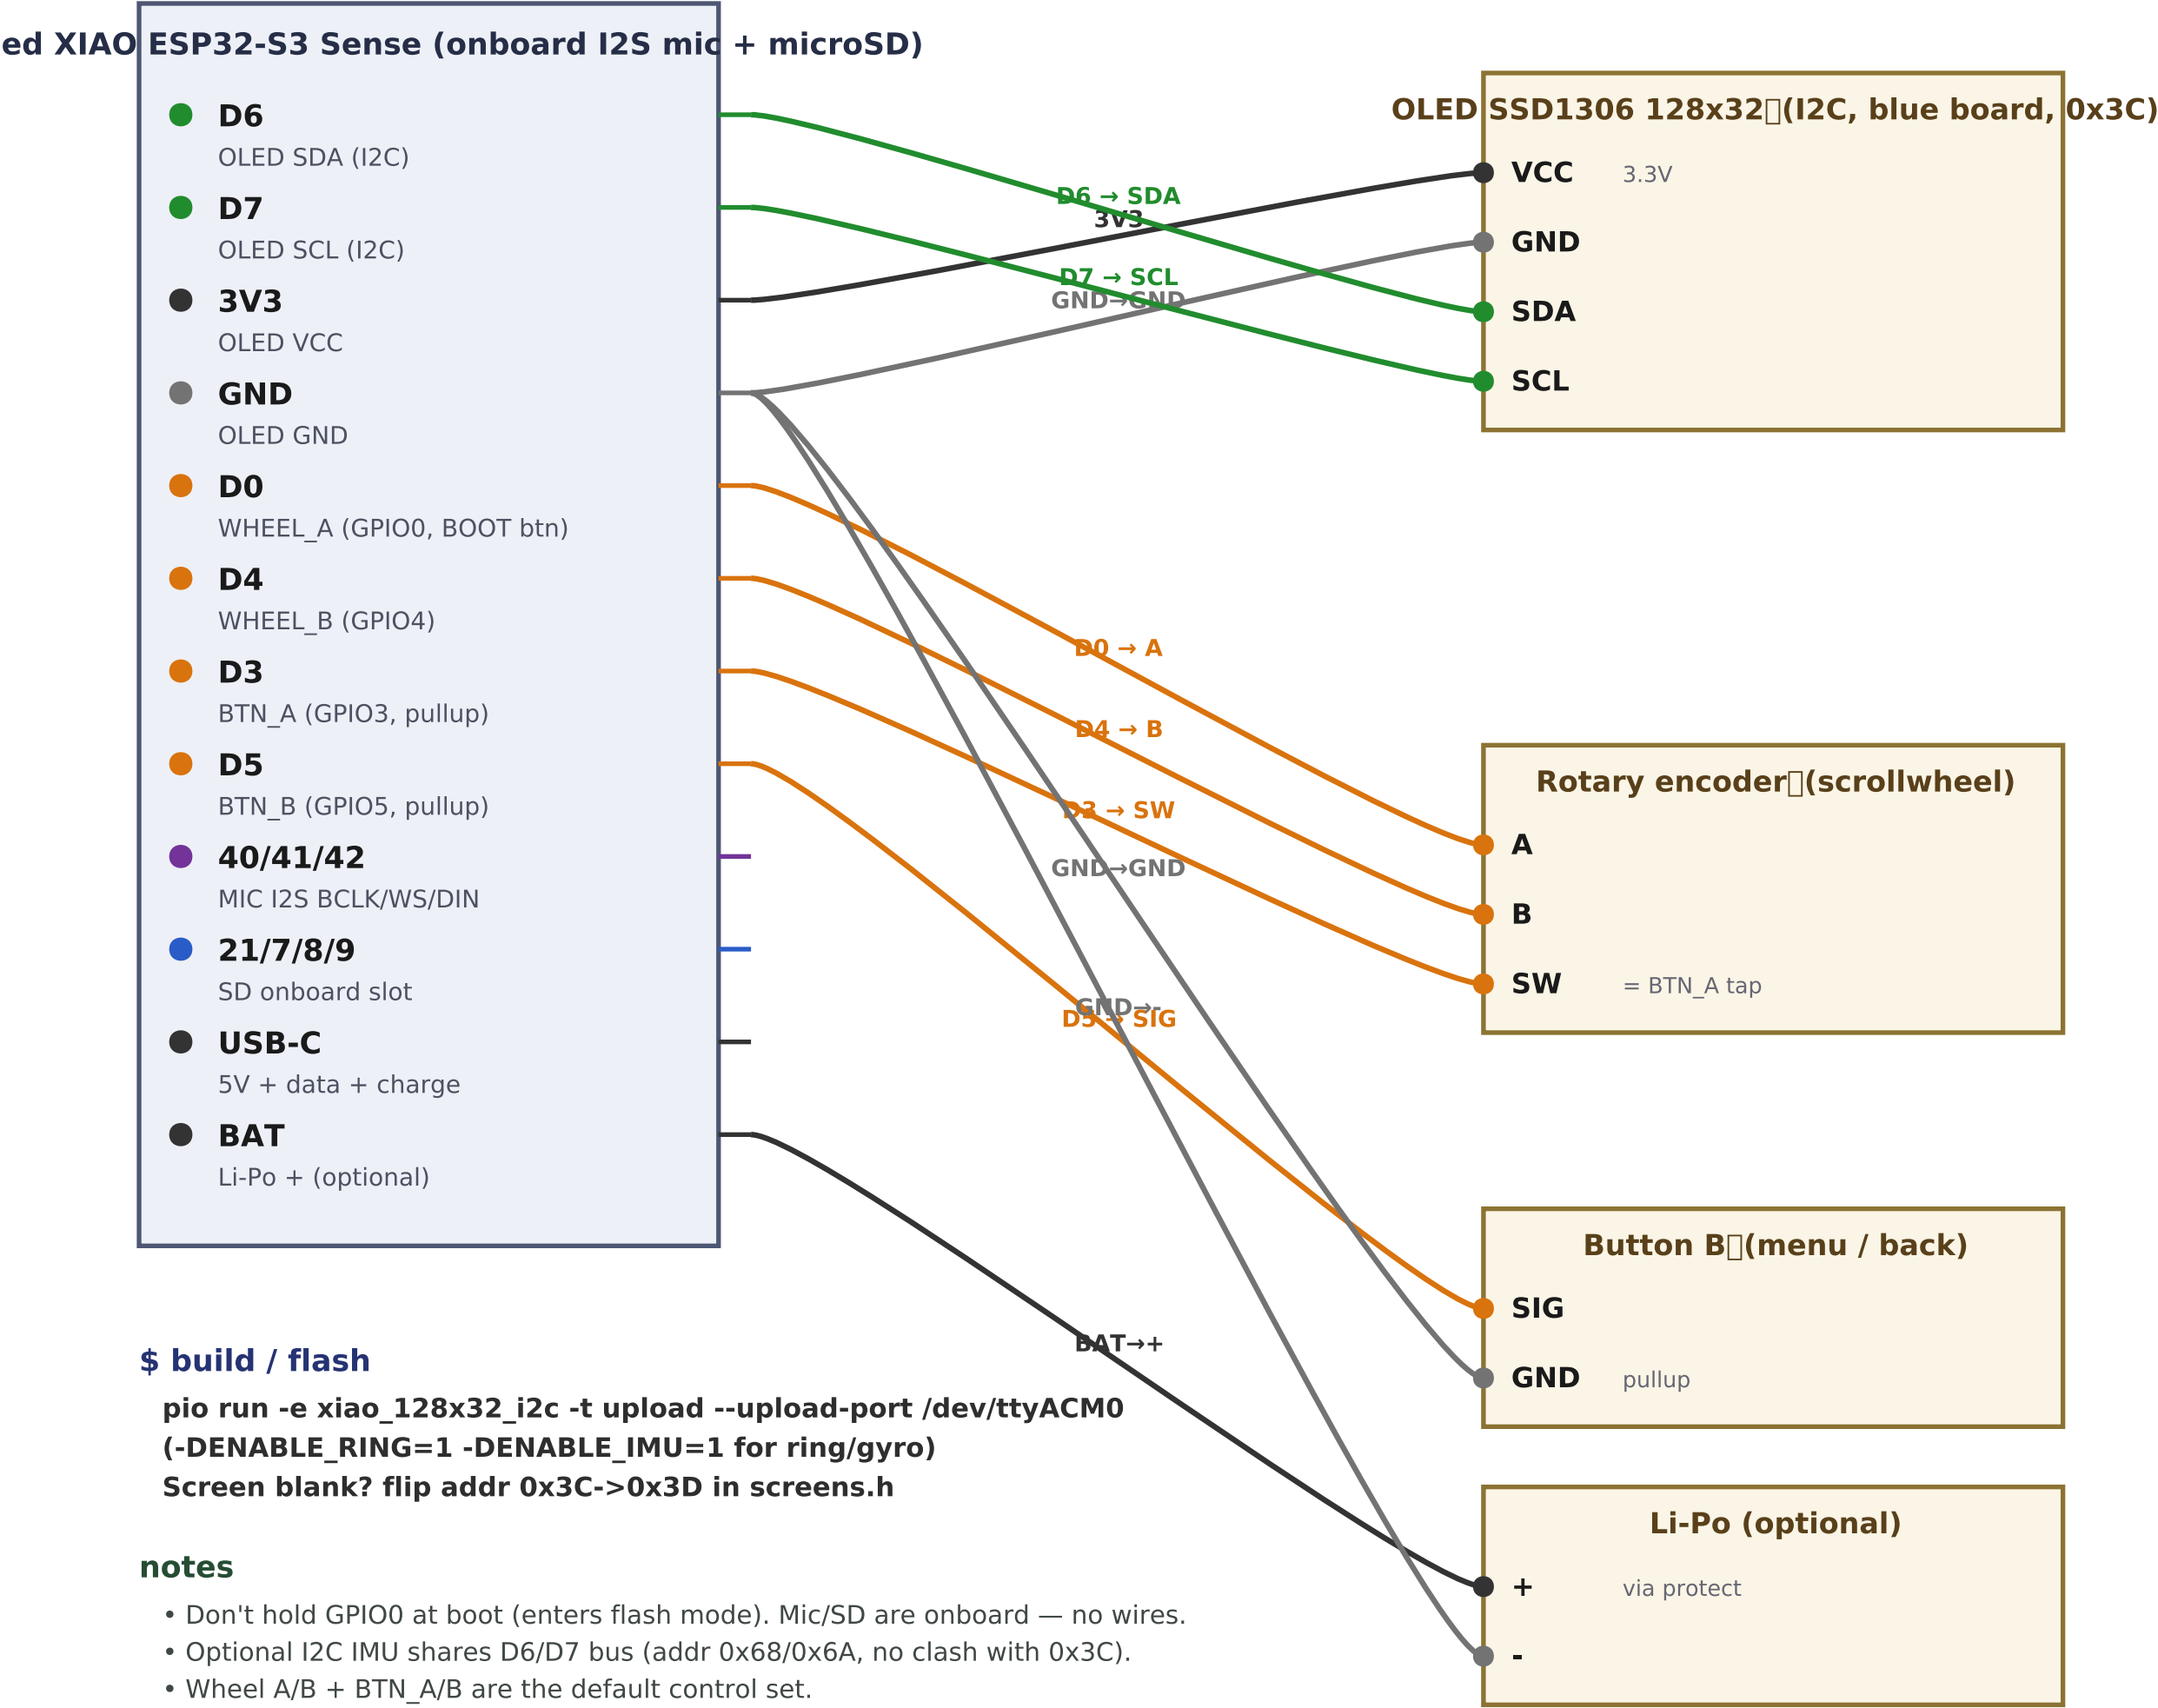

\$ build / flash

pio run -e xiao_128x32_i2c -t upload --upload-port /dev/ttyACM0
(-DENABLE_RING=1 -DENABLE_IMU=1 for ring/gyro)
Screen blank? flip addr 0x3C->0x3D in screens.h

notes

- Don't hold GPIO0 at boot (enters flash mode). Mic/SD are onboard — no wires.
- Optional I2C IMU shares D6/D7 bus (addr 0x68/0x6A, no clash with 0x3C).
- Wheel A/B + BTN_A/B are the default control set.

