


Lab 06-B Tasks Report Submission

Sabina Rasheed | 22k-5198

Task 01:

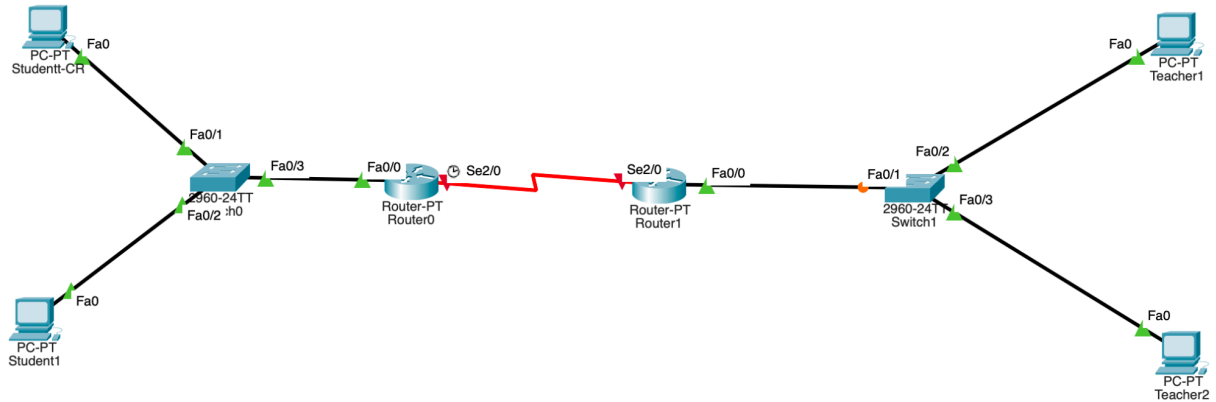

Router2

Physical Config CLI Attributes

IOS Command Line Interface

```
Router(config-if)#exit
Router(config)#
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
ip route 192.168.2.0 255.255.255.0 192.168.3.2
Router(config)#
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit exit
^
% Invalid input detected at '^' marker.

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#en
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 100 permit ip 192.168.2.0 0.0.0.255 192.168.1.0 0.0.0.255
Router(config)#access-list 100 permit ip host 192.168.1.2 192.168.2.0 0.0.0.255
Router(config)#access-list 100 deny ip 192.168.1.0 0.0.0.255 192.168.2.0 0.0.0.255
Router(config)#access-list 100 permit ip any any
Router(config)#interface Serial2/0
Router(config-if)#ip access-group 100 out
Router(config-if)#exit
Router(config)#show access-lists
^
% Invalid input detected at '^' marker.



Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show access-lists
Extended IP access list 100
 10 permit ip 192.168.2.0 0.0.0.255 192.168.1.0 0.0.0.255
 20 permit ip host 192.168.1.2 192.168.2.0 0.0.0.255
 30 deny ip 192.168.1.0 0.0.0.255 192.168.2.0 0.0.0.255
 40 permit ip any any



Router#
```

Copy Paste


Student PC'S can't connect to the teacher's network

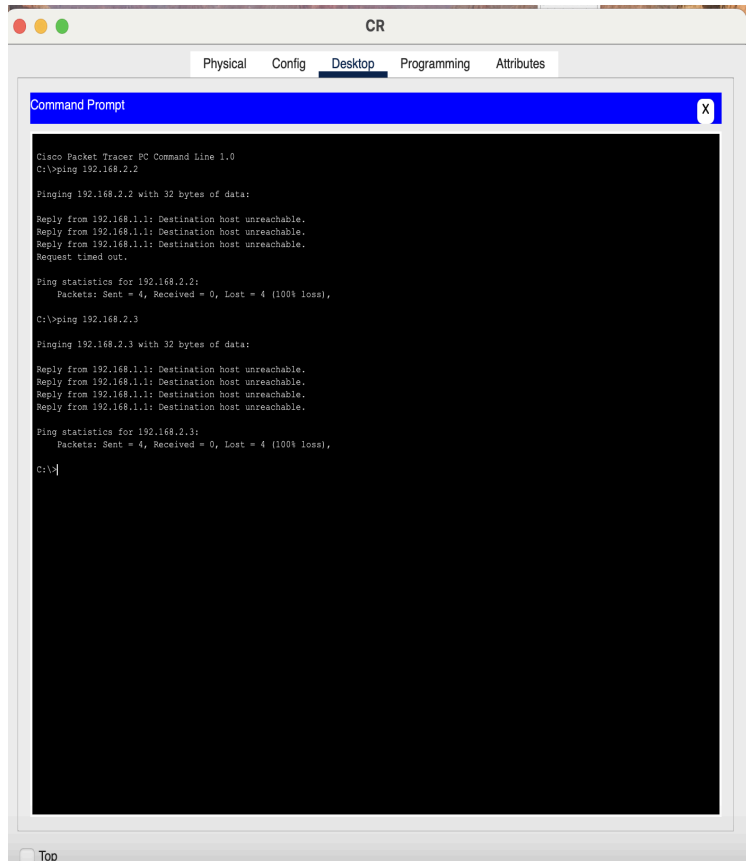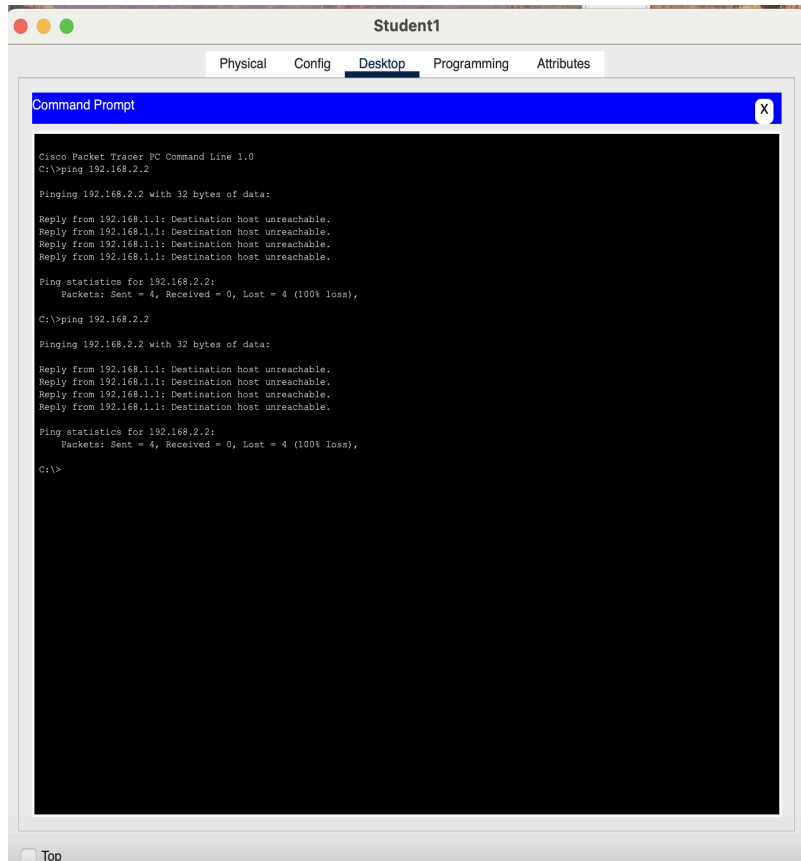


Teachers PC'S can connect to the students network

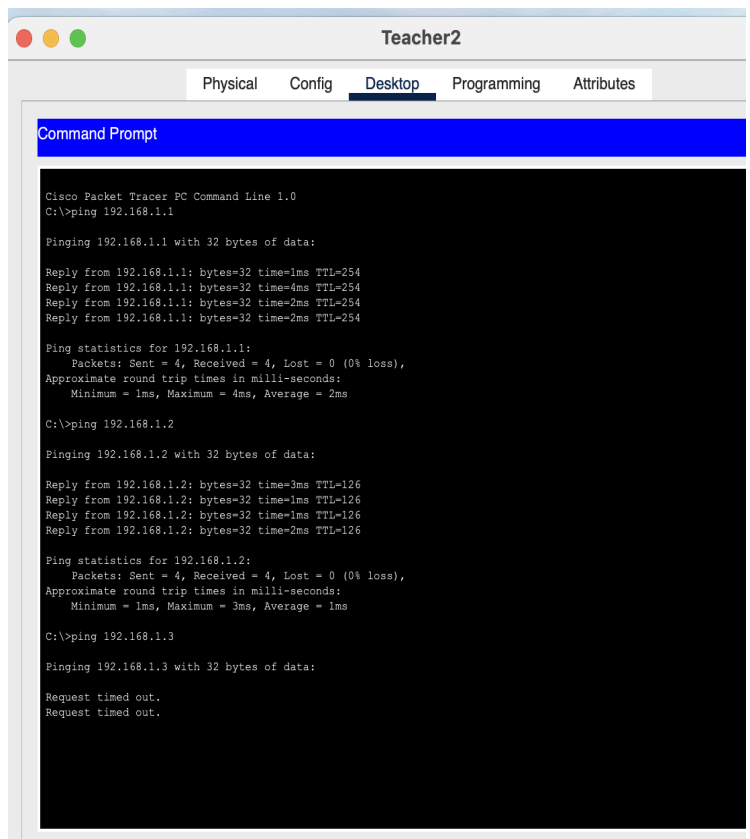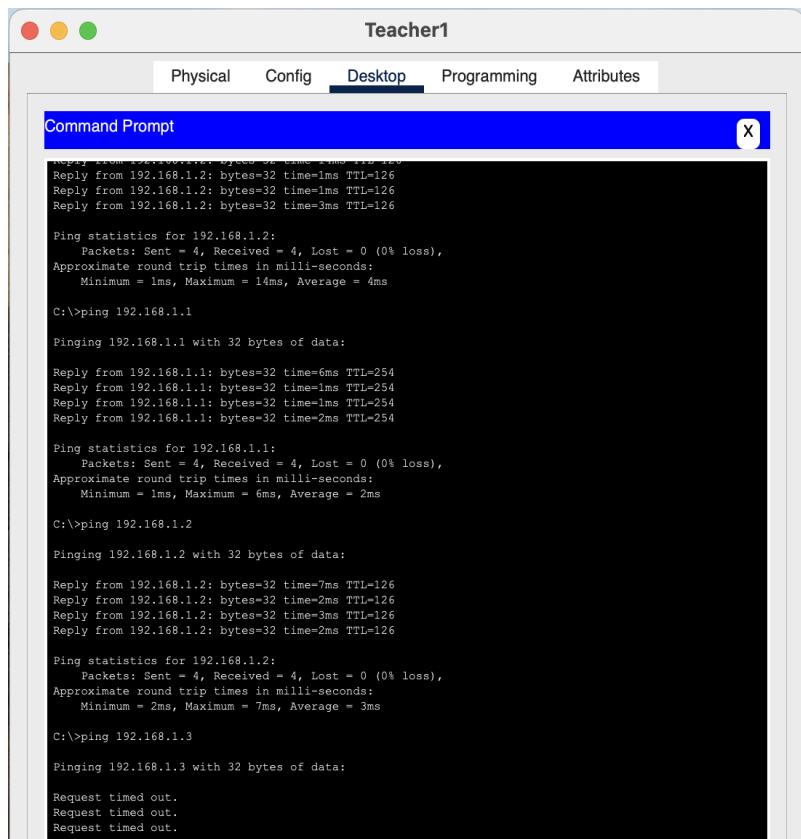


CR to Teacher:

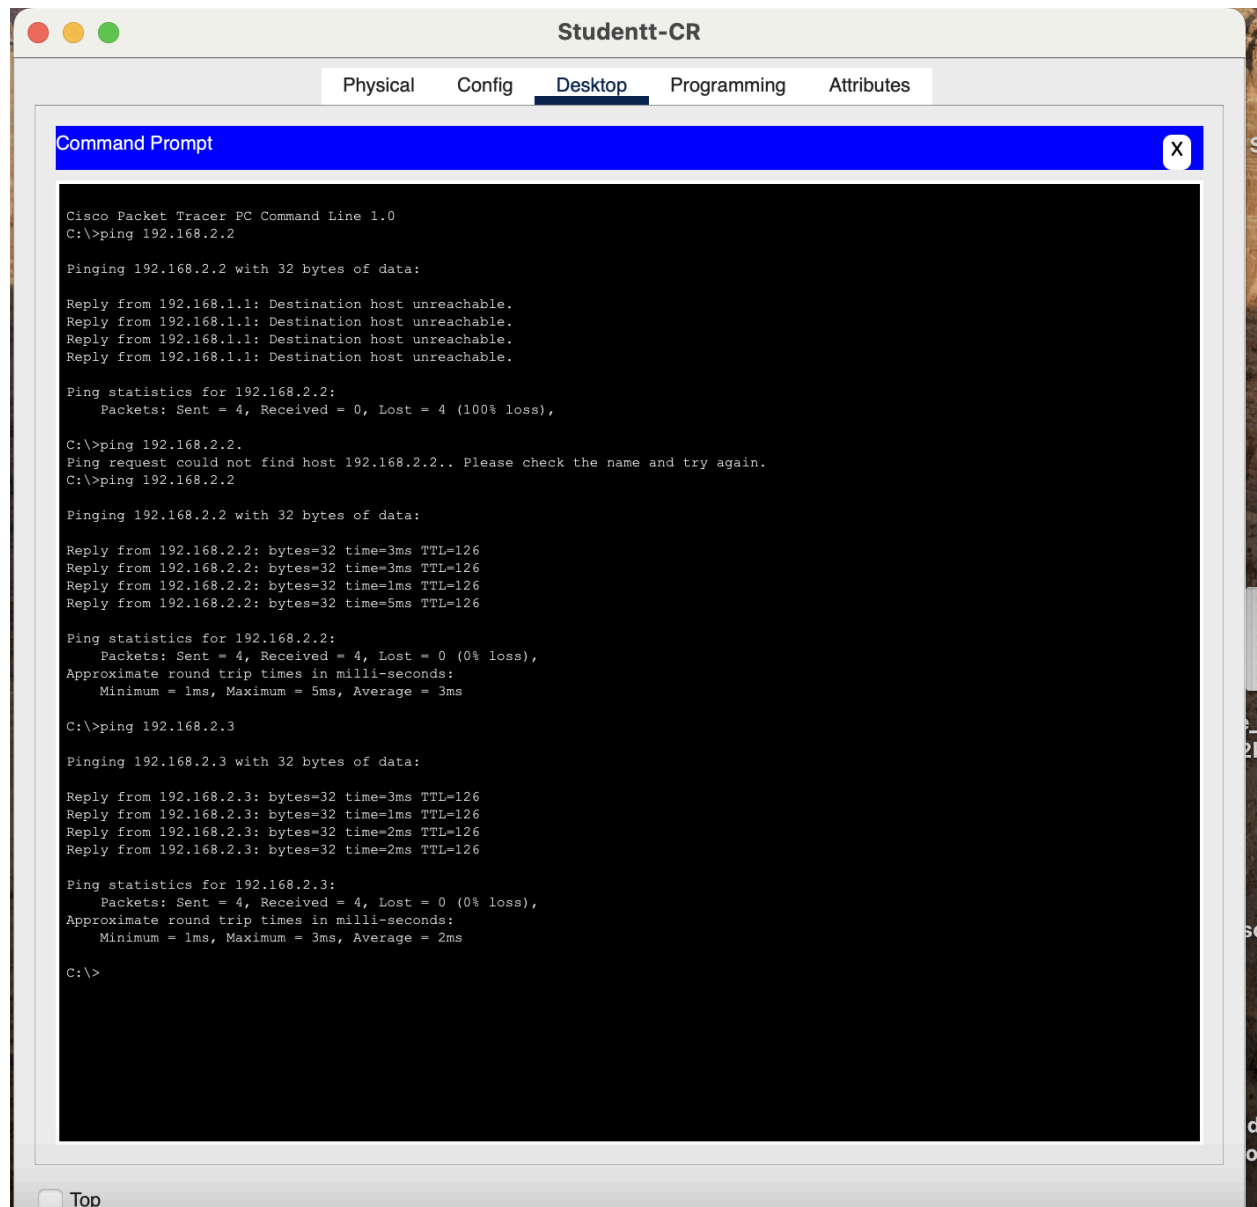

Task no 2:

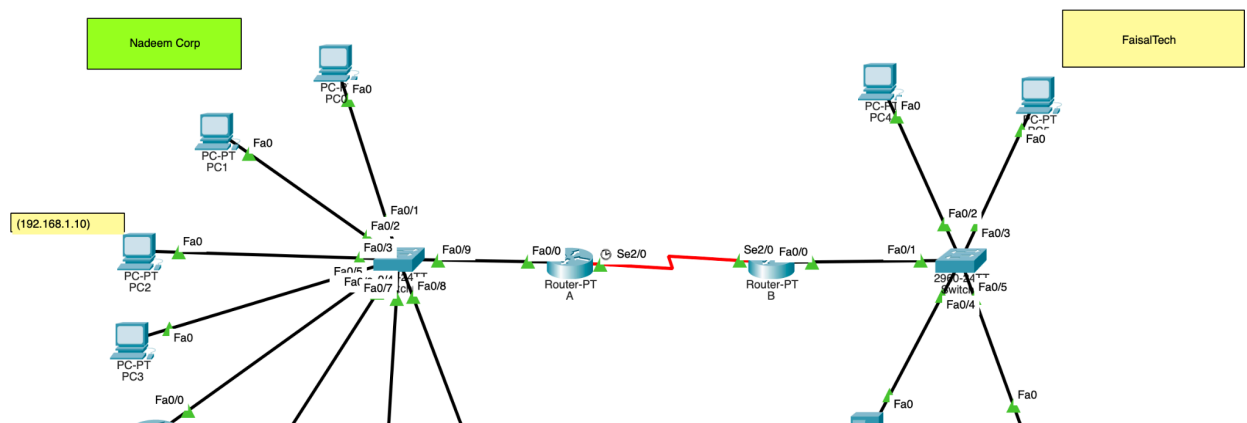

All set both the networks can communicate with each other up till now;

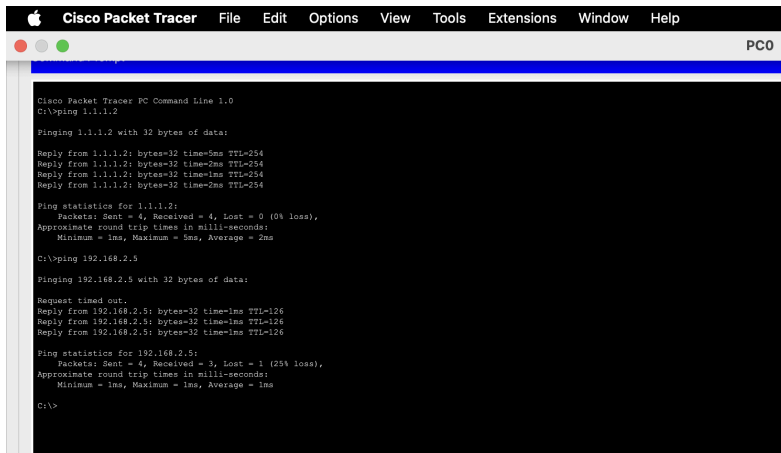

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 1.1.1.2

Pinging 1.1.1.2 with 32 bytes of data:

Reply from 1.1.1.2: bytes=32 time=5ms TTL=254
Reply from 1.1.1.2: bytes=32 time=2ms TTL=254
Reply from 1.1.1.2: bytes=32 time=1ms TTL=254
Reply from 1.1.1.2: bytes=32 time=2ms TTL=254

Ping statistics for 1.1.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 5ms, Average = 2ms


C:\>ping 192.168.2.5

Pinging 192.168.2.5 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.5: bytes=32 time=1ms TTL=126
Reply from 192.168.2.5: bytes=32 time=1ms TTL=126
Reply from 192.168.2.5: bytes=32 time=1ms TTL=126
Reply from 192.168.2.5: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.2.5:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>
```

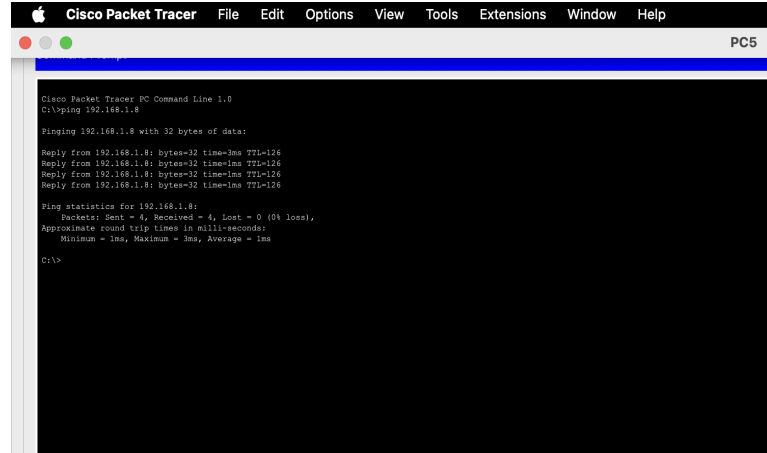

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.8

Pinging 192.168.1.8 with 32 bytes of data:

Reply from 192.168.1.8: bytes=32 time=3ms TTL=126
Reply from 192.168.1.8: bytes=32 time=1ms TTL=126
Reply from 192.168.1.8: bytes=32 time=1ms TTL=126
Reply from 192.168.1.8: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 1ms

C:\>
```

1. 192.168.1.10 restricted from accessing outside network




```
Router(config)#
Router(config)#exit
Router(config)#
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config)#interface Serial2/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial2/0
Router(config-if)#ip address 1.1.1.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#
Router(config)#ip route 192.168.2.0 255.255.255.0 1.1.1.2
Router(config)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up

Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show access-lists
Router#enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 10 deny 192.168.1.10
Router(config)#access-list 10 permit any
Router(config)#interface serial2/0
Router(config-if)#ip access-group 10 out
Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#write memory
Building configuration...
[OK]
Router#
```

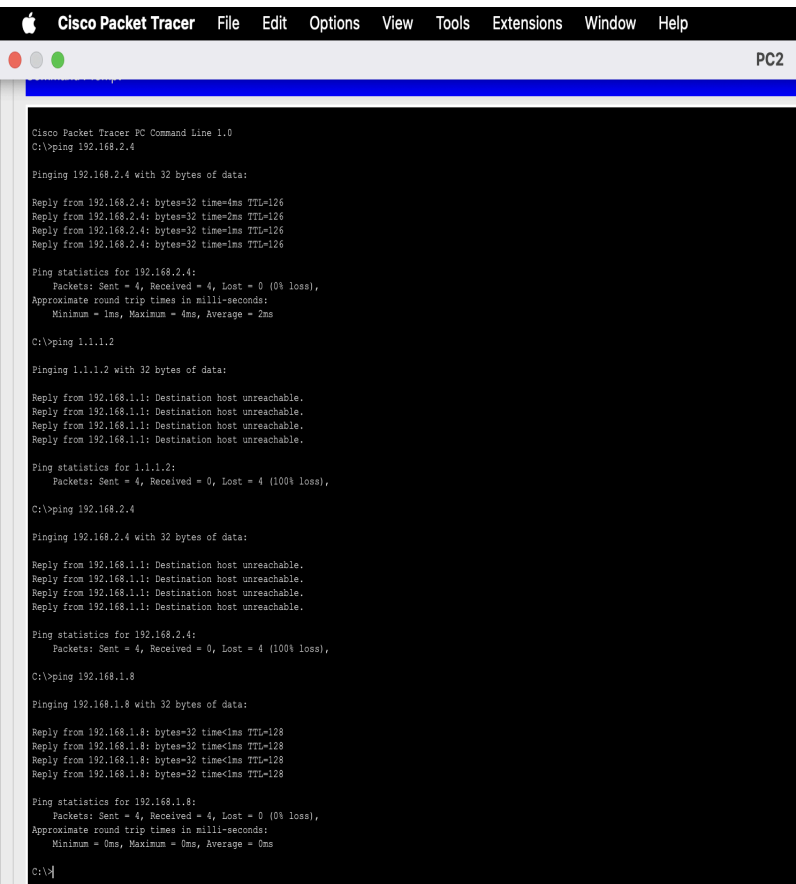

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.4

Pinging 192.168.2.4 with 32 bytes of data:

Reply from 192.168.2.4: bytes=32 time=1ms TTL=126
Reply from 192.168.2.4: bytes=32 time=2ms TTL=126
Reply from 192.168.2.4: bytes=32 time=1ms TTL=126
Reply from 192.168.2.4: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.2.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\>ping 1.1.1.2

Pinging 1.1.1.2 with 32 bytes of data:

Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.

Ping statistics for 1.1.1.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.2.4

Pinging 192.168.2.4 with 32 bytes of data:

Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.

Ping statistics for 192.168.2.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.1.8


Pinging 192.168.1.8 with 32 bytes of data:

Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128


Ping statistics for 192.168.1.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```


2. Restricting Server Access Using Extended ACL

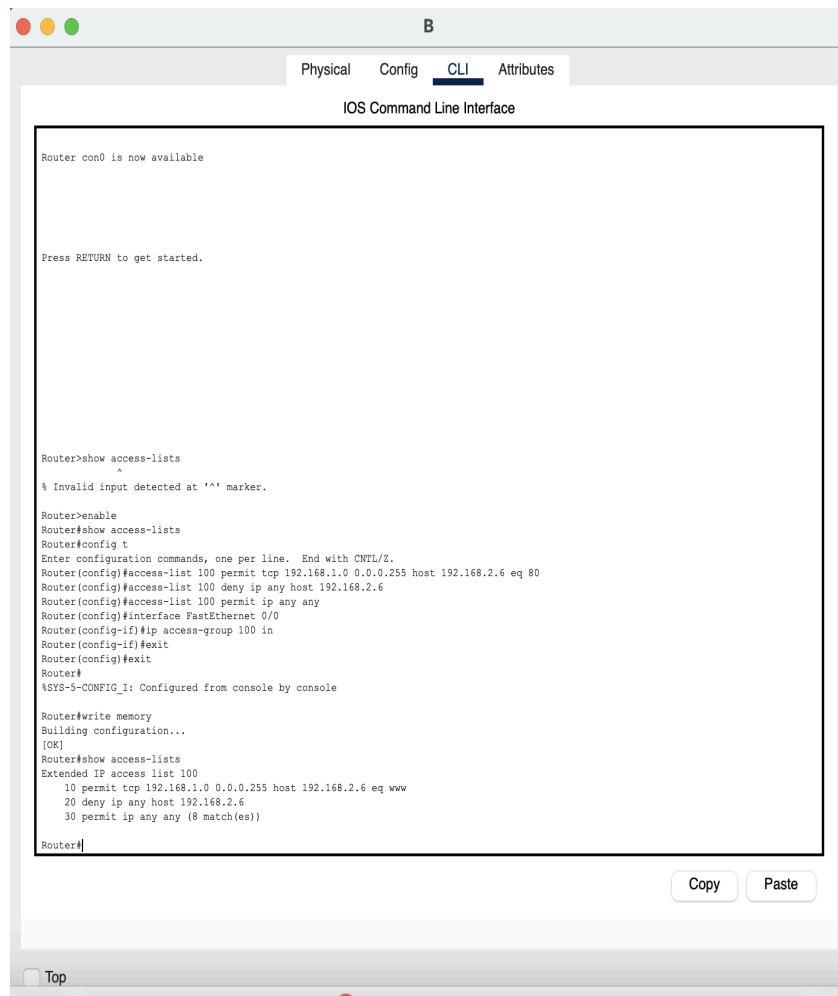


No access to other port like ftp (22) ensured using telnet to the server while http is allowed

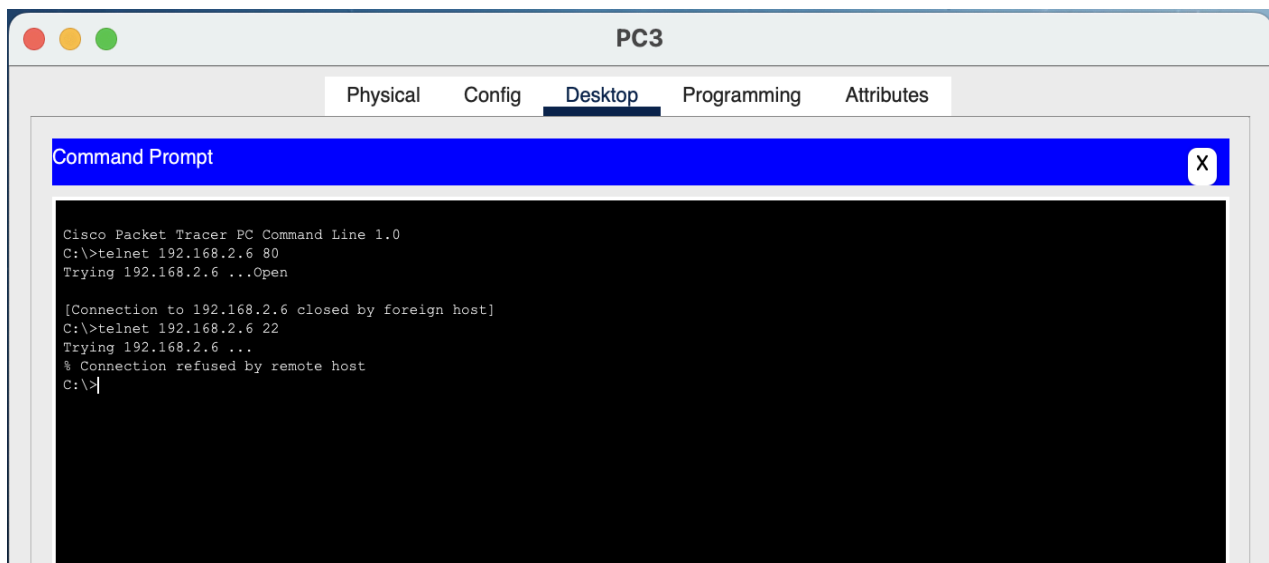


Successfully accessed http port form server 2:

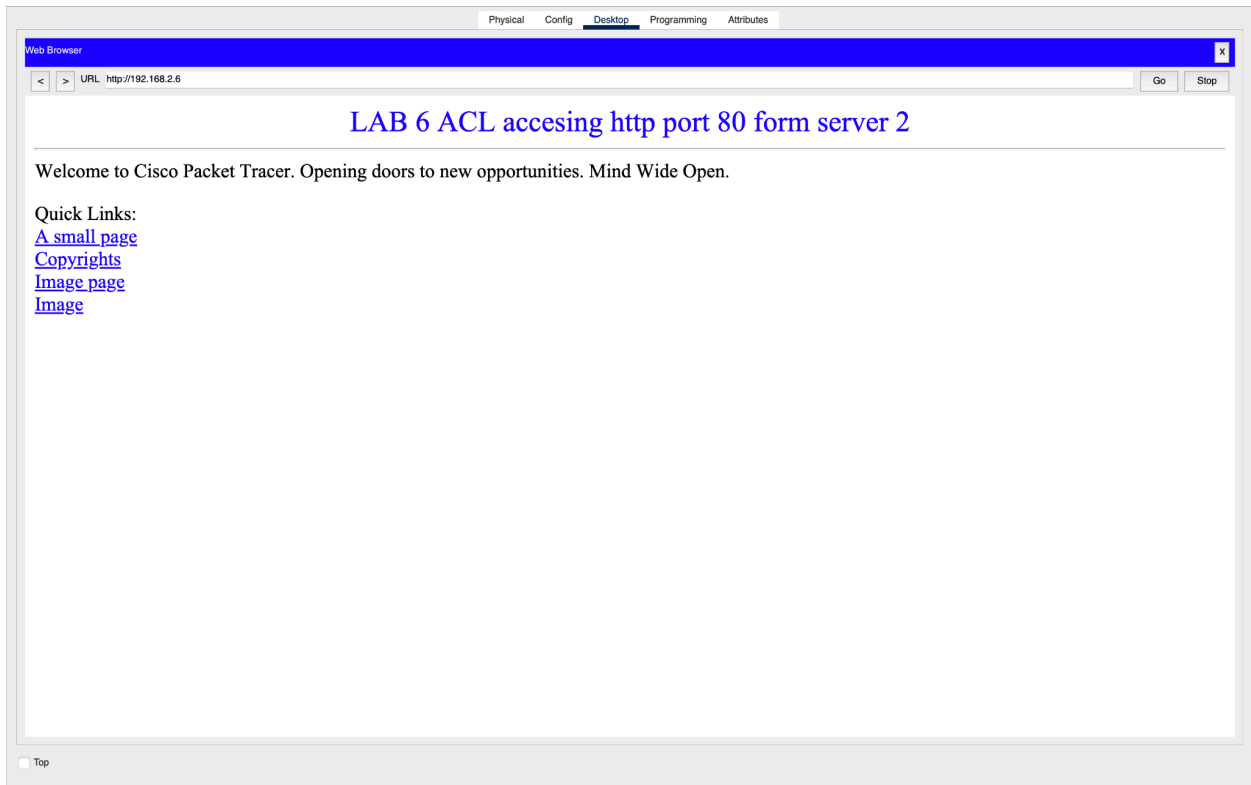


3. Allowing Secure Remote Management

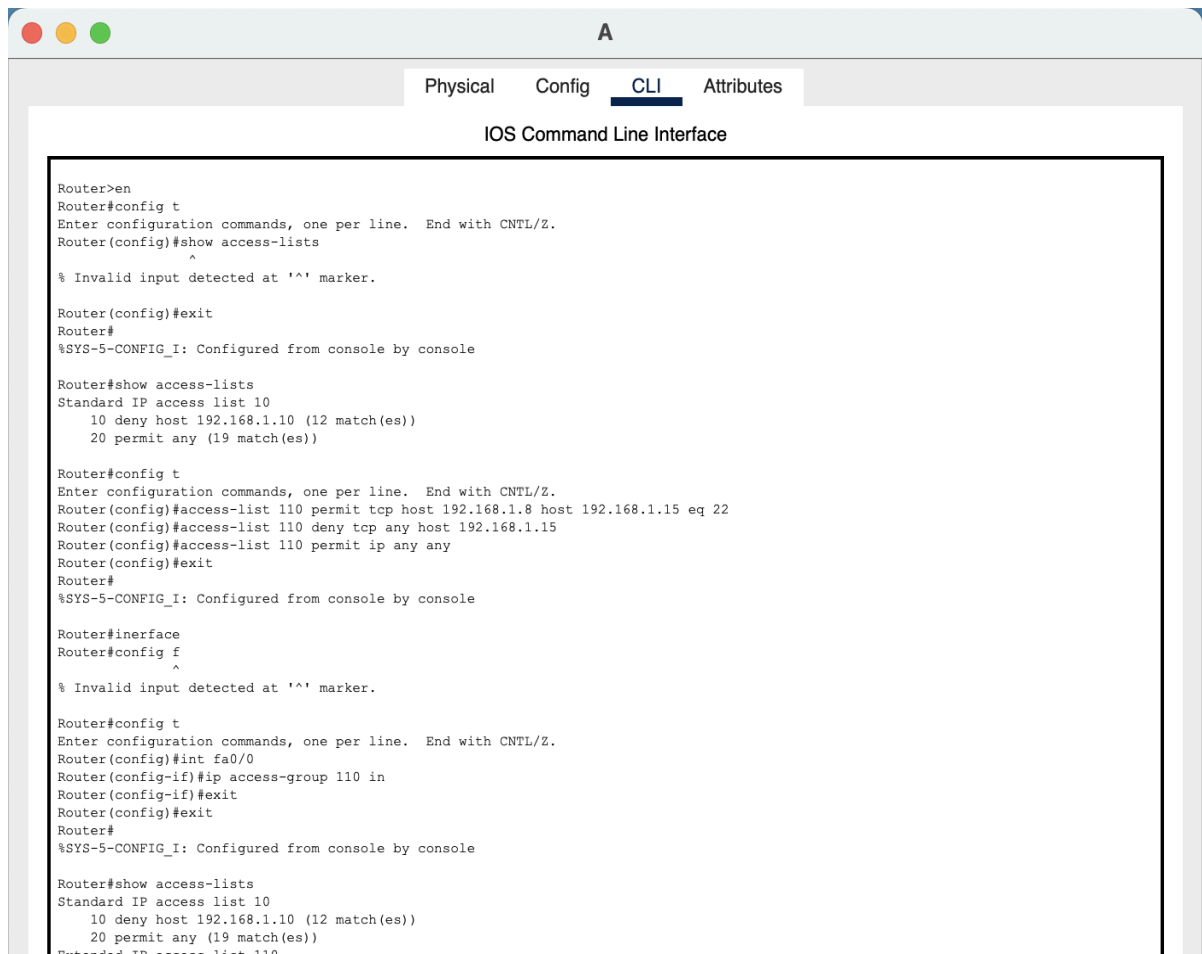


4. Blocking ICMP Traffic Between Networks

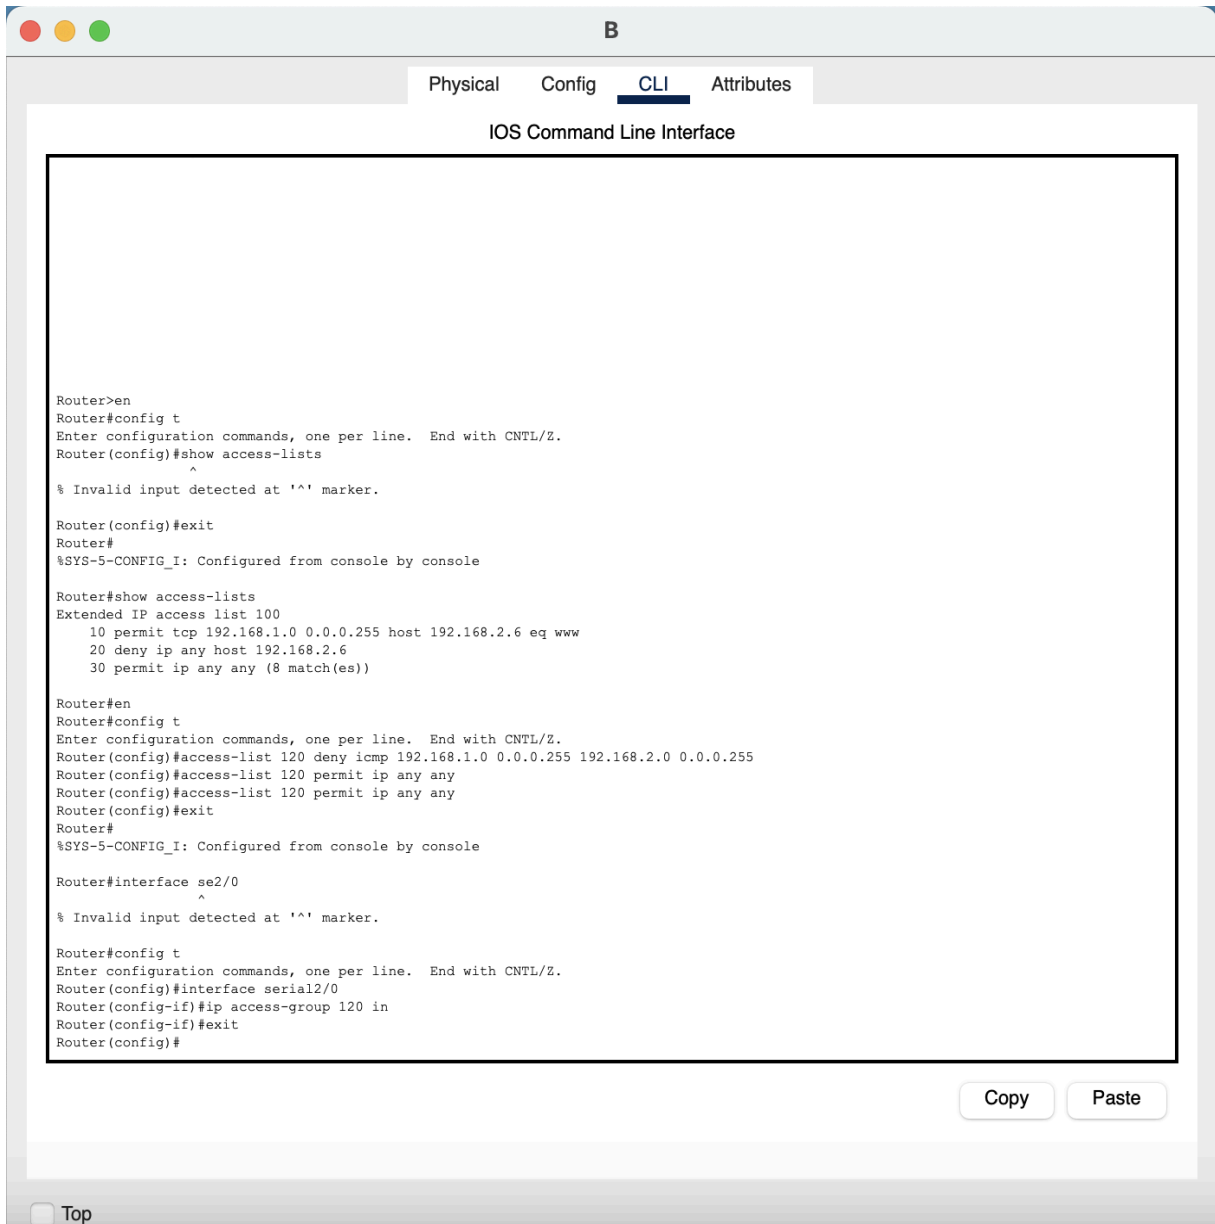

PC in Nadeem Corp can't ping to PC in FaisalTech

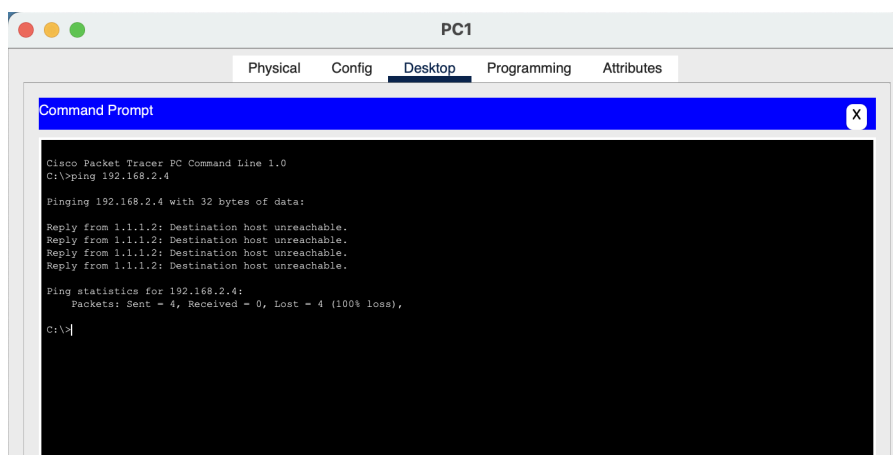

5. Allowing Specific Departmental Access

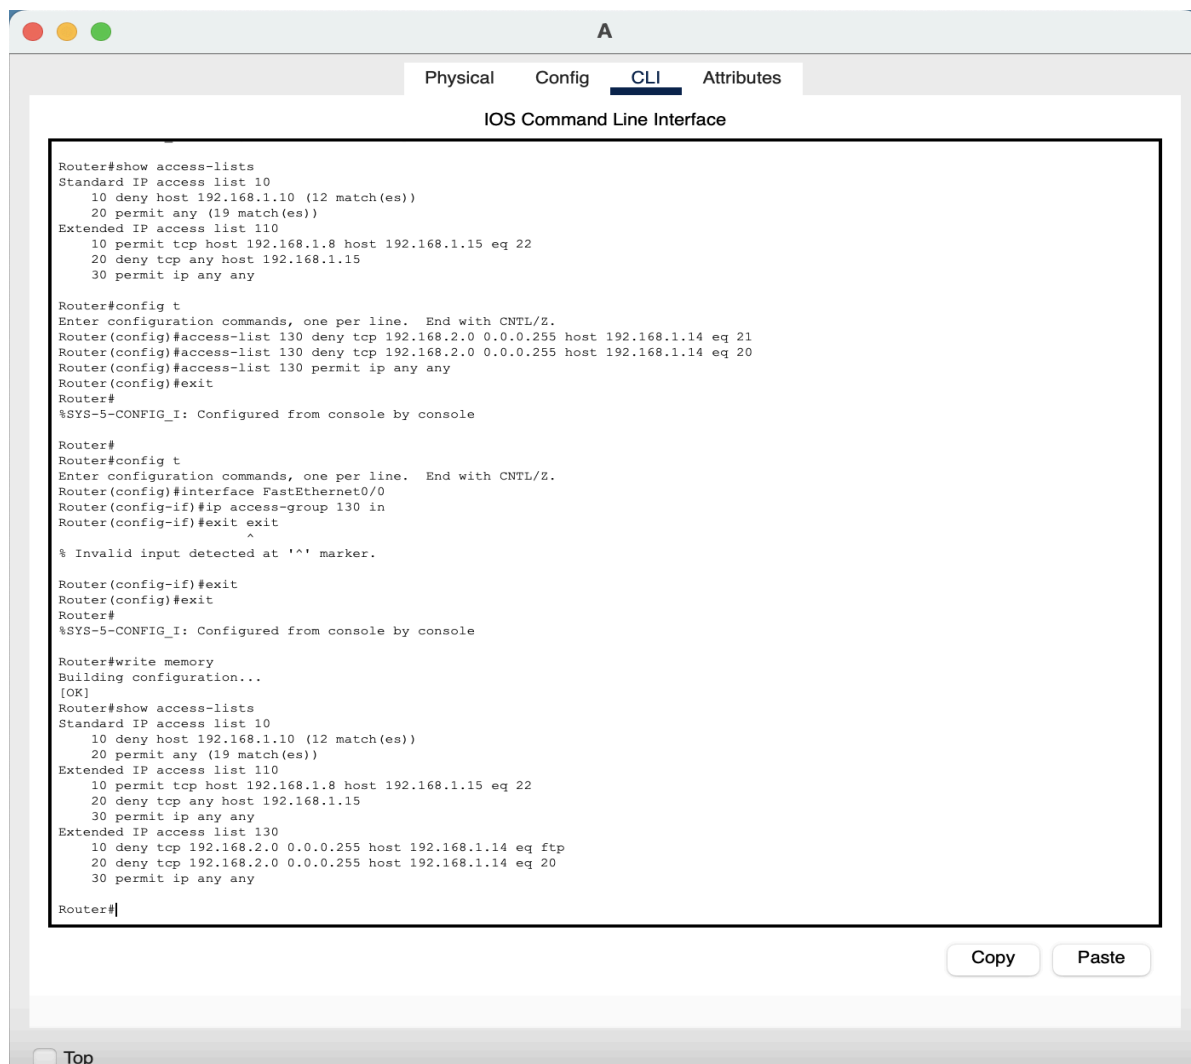

FaisalTech can't connect to ftp port to server0 192.168.1.14

