

Laibafatima
22K-S195
CN-L96

Date:.....

Congestion Control

1. Slow Start threshold: Exponential increase of packets
2. Congestion Avoidance: Additive Increase
3. Congestion Detection: Multiplicative decrease


- Use `Ptr < socket >` instead of pointer $\rightarrow$ `m_socket`

- Setup function includes:

`Setup (Ptr < socket >, address, packet size, npacket, dest state)`

- We should always close the socket when we don't need to use application.

Example used:

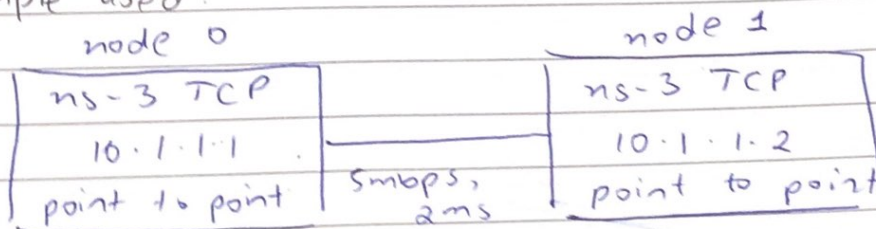

- In this case, if v6, true

IP: 2001:000:Food: cafe

- we used TCP socket factory in this example

- In `configurePlot`, ('name of file', 'plot title', x-axis, y-axis)

- To run file, we use `$J ./waf --run scratch/seventh`

- To run plot file `gnuplot filename`

