

1LDU — TECHNICAL RIDER

Live Electronic Performance

SHOW SUMMARY

1LDU is a fully hardware-based live electronic music performance. No laptop or computer is used. The set arrives fully pre-mixed and balanced at source. Minor channel EQ or master adjustments may be applied in coordination with the artist if needed. Personnel travelling: 1 × Artist (Ildefons Alonso Valls). Road manager may accompany on selected dates.

1. STAGE / TABLE REQUIREMENTS

- 1 × DJ or keyboard table: minimum 90cm (W) × 60cm (D), 100cm (H)
(provided by venue — see Section 9)
- Oriented facing the audience
- Position: centre stage preferred

2. POWER REQUIREMENTS

- 6 × Type F (Schuko) outlets at table position
- MANDATORY: Clean, isolated power — free from dimmer circuits, refrigeration, HVAC or lighting rig circuits
- If clean power cannot be guaranteed, venue must provide a dedicated power conditioner

3. INPUT LIST

Option A - STAGE SETUP

Ch	Name	Source	Conn.	DI
1	Synths L	Elektron Digitone	Jack / RCA	YES
2	Synths R	Elektron Digitone	Jack / RCA	YES
3	Drums / Samples L	Elektron Model:Samples	Jack / RCA	YES
4	Drums / Samples R	Elektron Model:Samples	Jack / RCA	YES

DI box specifications (provided by venue):

- 4 × Active DI boxes — Radial Pro48, BSS AR133 or equivalent.
Radial JDI (passive) accepted.
Budget passive DI boxes (e.g. Behringer) are NOT acceptable.
- Identical model, matched gain and pad settings across all 4 units.
- The set is pre-balanced. Minor channel EQ adjustments only,
in coordination with the artist.

Option B - DJ BOOTH SETUP:

- 2 × stereo RCA pairs into DJ mixer line inputs
(or 4 × Jack/RCA into available channel line inputs)
- DJ mixer: Allen & Heath Xone series, Pioneer DJM-900NXS2
or equivalent professional-grade

- Access to DJ mixer headphone output
 - 1 × dedicated power strip (minimum 6 outlets, Type F Schuko) for artist's equipment — do NOT share with booth equipment
-

4. MONITORING

OPTION A — STAGE SETUP:

AUX 1–2 Stereo (hard panned L/R) → 2 × full-range floor monitors at performance position (min. 50Hz–18kHz)

AUX 3–4 Stereo (hard panned L/R) → 2 × XLR plug at stage position terminating for artist's IEM system (artist provides XLR socket connections)

OPTION B — DJ BOOTH:

- Booth monitors (venue's existing setup)
- Headphone output on DJ mixer for artist monitoring

Mix content (both options): Full blend of all 4 channels.

NOTE — BACK-TO-BACK / LINKED SETS:

If 1LDU's set follows directly after another artist, access to the DJ mixer CUE channel during the final minutes of the preceding set is required to perform a silent line check before going live.

5. PA REQUIREMENTS

- Minimum 100–105 dBA SPL continuous, full audience coverage
 - Full frequency range: 50Hz to 18kHz
-


6. SCHEDULE / ACCESS

- Load-in & setup: 30 min
 - Soundcheck: 90 min (line check + full mix at performance SPL)
 - Access required prior to doors opening
-

7. LIGHTING

- Dim lighting preferred — sufficient to see instruments
- Lighting operator during performance is appreciated

8. STAGE PLOT

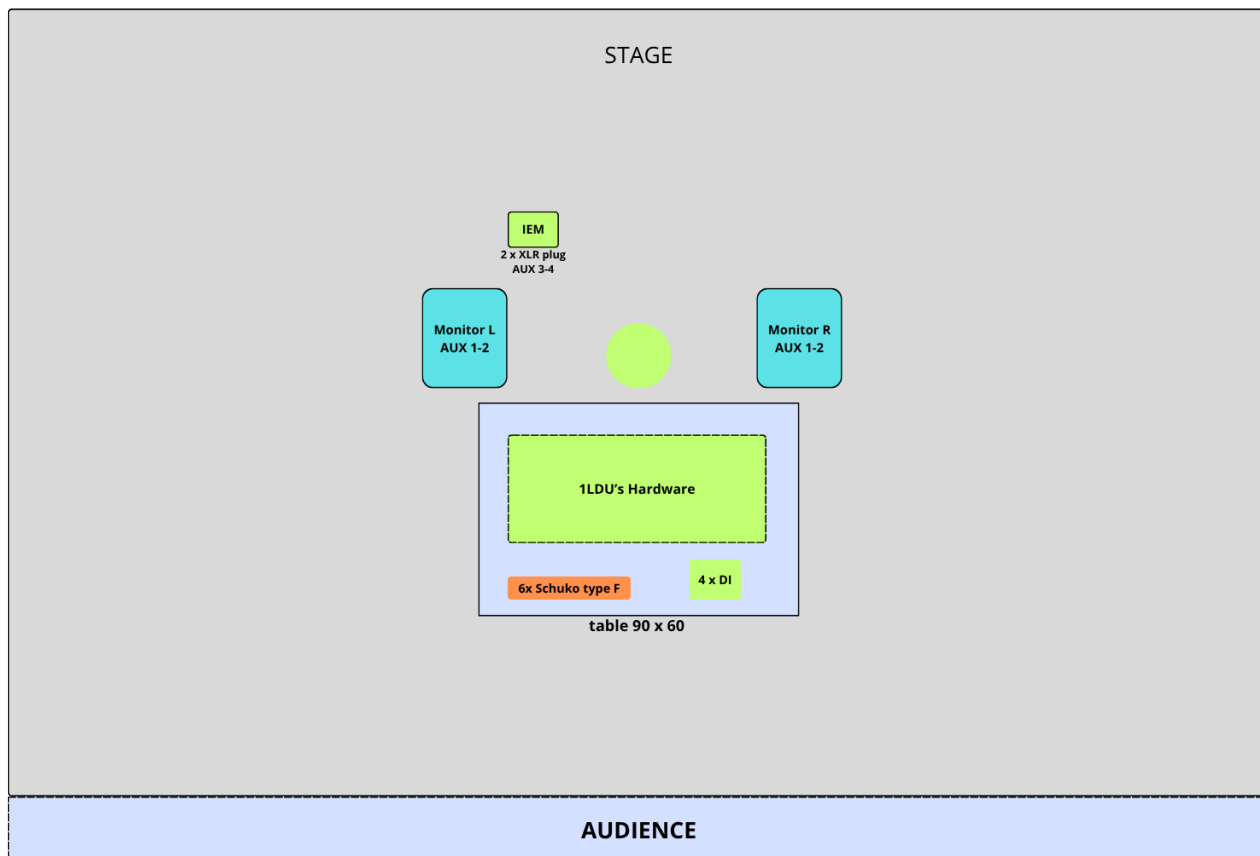

9. BACKLINE (provided by venue)

OPTION A — STAGE SETUP:

- 1 × Table: minimum 90cm (W) × 60cm (D), 100cm (H)
- 4 × Active DI boxes (identical model, matched gain — see Section 3)
- 2 × Full-range floor monitors (stereo pair)
- 2 × XLR plug connectors at stage position (IEM feed)
- 6 × Type F (Schuko) outlets, clean isolated power

OPTION B — DJ BOOTH:

- Space on DJ booth table: minimum 90cm (W) × 60cm (D)
- 2 × RCA stereo pairs into DJ mixer line inputs
(or 4 × Jack/RCA into available channel line inputs)
- DJ mixer: Allen & Heath Xone series, Pioneer DJM-900NXS2
or equivalent professional-grade
- Access to DJ mixer headphone output
- 1 × dedicated power strip (minimum 6 outlets, Type F Schuko)
for artist's equipment — do NOT share with booth equipment

Hospitality:

- Water during soundcheck and performance
- Catering: gluten-free and dairy-free options

CONTACT
