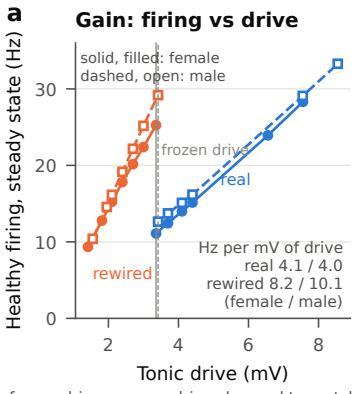

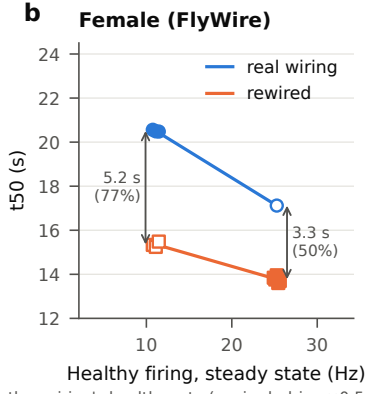

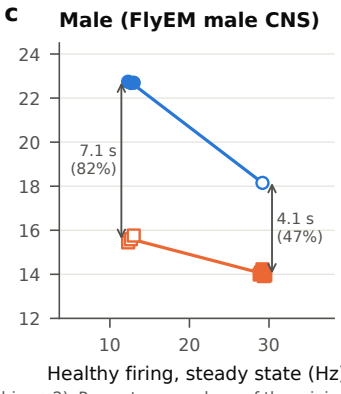
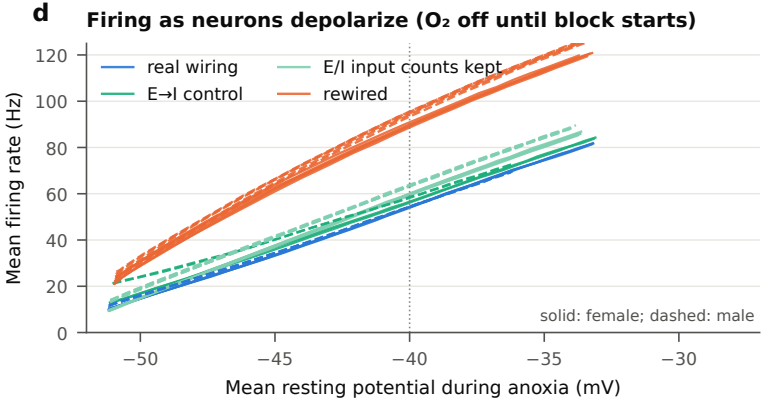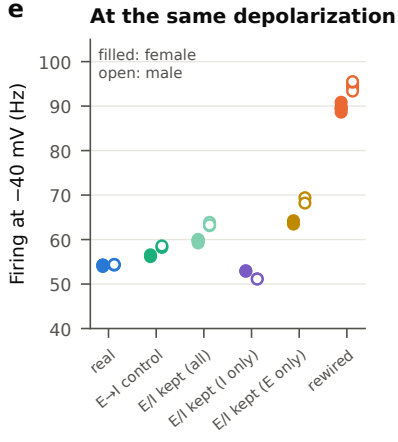
In b–c: filled = frozen drive; open = drive changed to match the other wiring's healthy rate (rewired: drive ×0.5; real: drive ×2). Percentages = share of the original gap that remains.