

Possibility of carbon-dioxide pumped terahertz sources

Gergő Illés¹, Gabit Nazymbekov¹, György Tóth², János Hebling²

1. University of Pécs Ifjúság útja 6, 7624 Pécs, Hungary

2. Università Politecnica delle Marche, IT-60131 Ancona, Italy

Terahertz generation in nonlinear media is known to be a widely used way to generate single cycle terahertz pulses with great efficiency. Using high pumping intensity in semiconducting materials at the close infrared region is not feasible due to the high multiphoton absorption. [1] As of now, carbon-dioxide lasers with sub-picosecond pulse durations are available [2], which can eliminate low-order multiphoton absorption since their central wavelength is approximately 10 μm .

Numeric 1D+1 calculations were ran with pulse durations between 0.5-2.5 ps and intensities from 20- to 100 GW/cm^2 . Our mathematical model took account for the optical rectification, cascading up- and downconversion of pump pulse, the self phase modulation of pump pulse [3] and the second harmonic generated by the pump pulse. The nonlinear media was chosen to be Gallium-Arsenide (GaAs). The result with 1.5 ps pulse duration and 60 GW/cm^2 pumping intensity is shown on Fig.1.

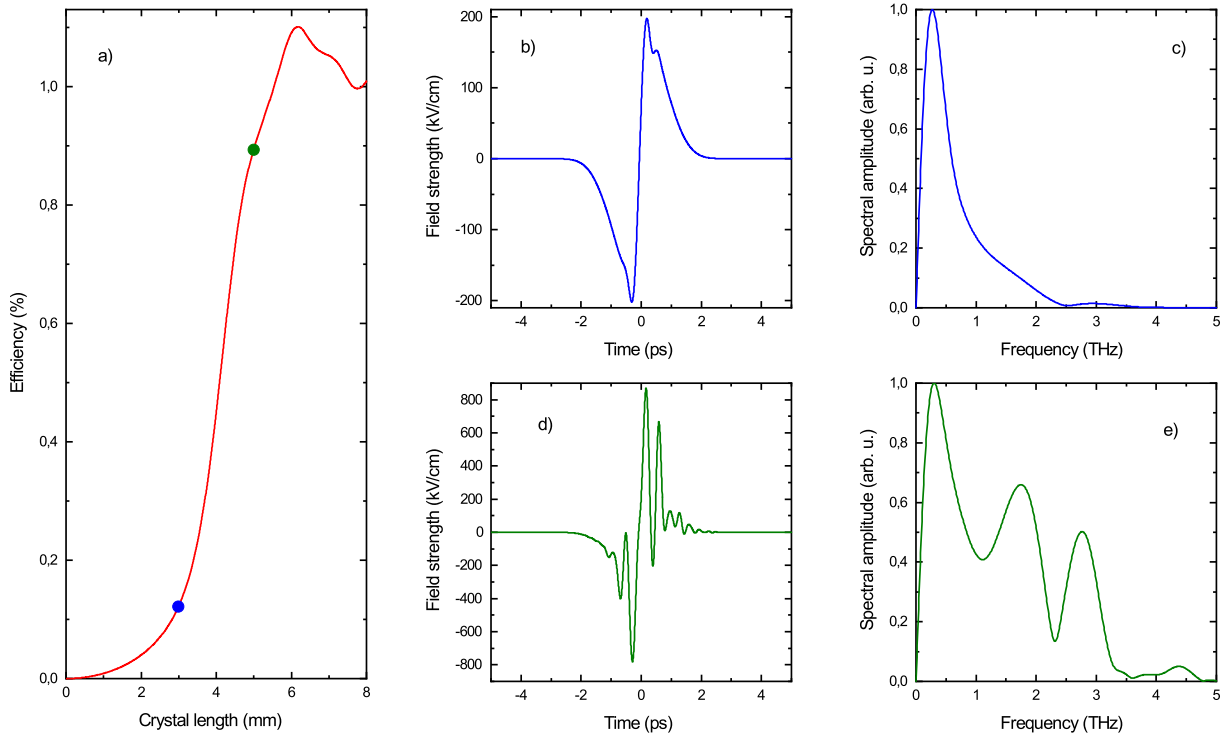


Fig. 1 Results of numeric calculations: a) conversion efficiency, b)-c) electric field and spectrum at 3 mm, d)-e) electric field and spectrum at 5 mm

The results show that carbon-dioxide pumped GaAs crystal is capable of generating THz pulses with adequate efficiency and field strength. At 3 mm crystal length the shape of the THz pulse is usable for most applications that require single-cycle THz pulses. The efficiency at 3 mm is 0.1% and the peak field strength is 200 kV/cm. At 5 mm crystal length the conversion efficiency further increases to 0.9% however the THz pulse becomes highly modulated.

References

- [1] G. Polónyi, B. Monoszalai, G. Gäumann, *et al.*, “High-energy terahertz pulses from semiconductors pumped beyond the three-photon absorption edge,” *Optics express*, vol. 24, no. 21, pp. 23 872–23 882, 2016.
- [2] M. N. Polyanskiy, I. V. Pogorelsky, M. Babzien, and M. A. Palmer, “Demonstration of a 2 ps, 5 tw peak power, long-wave infrared laser based on chirped-pulse amplification with mixed-isotope co 2 amplifiers,” *OSA Continuum*, vol. 3, no. 3, pp. 459–472, 2020.
- [3] K. Ravi, W. R. Huang, S. Carbajo, X. Wu, and F. Kärtner, “Limitations to thz generation by optical rectification using tilted pulse fronts,” *Optics express*, vol. 22, no. 17, pp. 20 239–20 251, 2014.