

# Theoretical Mechanics: Big Homework 2

Ekaterina Mozhegova

March 13, 2024

## 1 Link

Link to the GitHub repository containing all the materials Colab

## 2 Task Description

1. Obtain the required measurements of the stand (like needed masses, lengths and so on).
2. Gather the positions and velocities of the stand. You should run the same experiment 3 times each.

Initial conditions:

- $x = 0, \phi = 15^\circ, \dot{x} = 0, \dot{\phi} = 0, t = 0;$
  - $x = 0.25 \text{ m}, \phi = 45^\circ, \dot{x} = 0, \dot{\phi} = 0, t = 0;$
  - $x = 0.25 \text{ m}, \phi = -135^\circ, \dot{x} = 0, \dot{\phi} = 0, t = 0;$
3. Substitute real data to your math model from HW 7, 8 (you can choose any method you like) and compare the results (propose and justify the metric).
  4. Explain what affects the difference between the math model and real data. Is the difference significant?
  5. If so, change the model (add new forces, change the object representation), gather new needed data and compare it again.
  6. Make a conclusion.

### 2.1 What report should contain

- The list of used tools and applications (I gathered a trajectory dataset using  $x$  tool), etc.
- The list of data you gathered from the stand and how did you do it.


- Show how you conducted experiments. Is there any difference when you did the same experiment? Show it using plots and/or other metrics like *std*, *mse* and so on.
- Show the way how you chose the metrics for trajectory comparison, how you justify the answer.
- If the error is too large, explain how you wanted to change your model and why you chose such a path.
- Summarize your experience.

### 3 Task Explanation. Practical solution


For each of the three initial conditions, we conducted 3 tests for each condition. After data parsing, we calculated the mean value of angle and position.

The plots of the experiments are shown below.


**Initial condition 1:**  $\phi = 10^\circ$ ,  $x = 0$

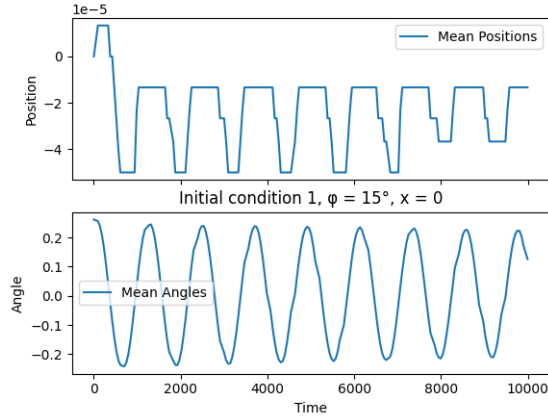

**Initial condition 2:**  $\phi = 45^\circ$ ,  $x = 0.5$

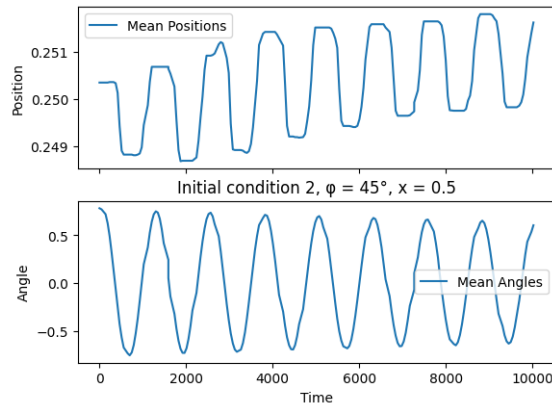

**Initial condition 3:**  $\phi = -135^\circ$ ,  $x = 0.5$

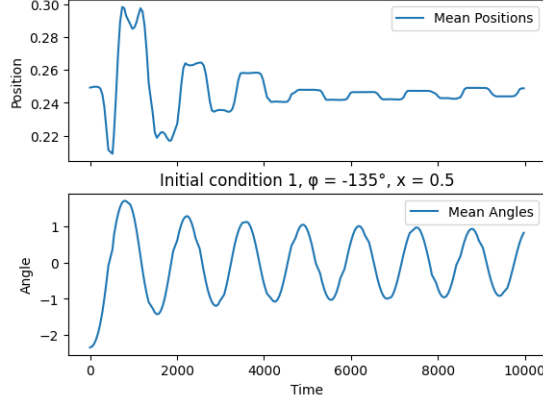

## 4 Task Explanation. Analytical solution

**Research object:** A system of 2 rods: rod 1 and rod 2

**Motion:** Rod 1 - rotational and plane motions, rod 2 - rotational and plane motions

**Force analysis:**  $G_1 = m_1g$ ,  $G_2 = m_2g$ ,  $F_{fr}$ ,  $F_{drag}$

**Solution:**

Let's solve the system using Newton-Euler method.

To accurately model the real-world system, it is necessary to incorporate air drag and friction into our dynamics equations.

$$\text{eq1: } -T \sin(\phi) + m_1 \ddot{x} + km_1g \tanh(1000\dot{x}) = 0$$

$$\text{eq2: } N - m_1g - T \cos(\phi) = 0$$

$$\text{eq3: } T \sin(\phi) + m_2 \left( \ddot{\phi} \cdot l \cos(\phi) - \dot{\phi}^2 \cdot l \sin(\phi) + \ddot{x} \right) + k_{air} \sin(\phi) \tanh(1000\dot{x}) = 0$$


$$\text{eq4: } T \cos(\phi) - m_2g - m_2 \left( \ddot{\phi} \cdot l \sin(\phi) + \dot{\phi}^2 \cdot l \cos(\phi) \right) + k_{air} \cos(\phi) \tanh(1000\dot{x}) = 0$$

$F_{fr}$  changes the sign, and to represent this change of sign, we introduce  $\tanh(1000\dot{x})$ .

Solve computationally with sympy.

Substitute constants (e.g., masses) with the values we measured.

## 5 Plots

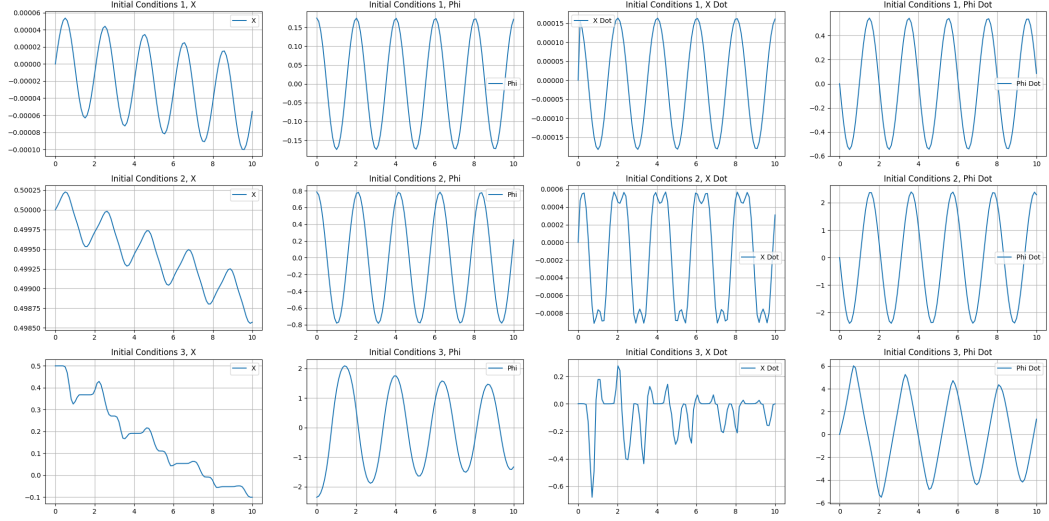

## 6 Discussion

Friction is estimated conditionally. We do not have precise coefficients for friction or air resistance. For more accurate results, this will be necessary. Also, the consideration of the mass of the cart is important.”

## 7 Team management:

Mikhail and I changed the tape in the cart-pole system to overcome the excessively high error. We connected an Arduino to it to obtain the required measurements of the stand. Timur, Leonid, Andrey, Elina, Reza, and I measured the values, while Mikhail and Yura solved the dynamics, data parsing - me.