

16th FreeFEM 2024

F. Hecht

LJLL, Sorbonne Université, Paris, projet Alpines, Inria de Paris
with P. Jolivet, P-H. Tournier, F. Nataf

Paris, 12,13 december 2024, Sorbonne Université , Paris

<http://www.freefem.org>

<mailto:frederic.hecht@sorbonne-universite.fr>



Outline

- 1 Introduction
- 2 Tools
- 3 Academic Examples
- 4 Bose Einstein Condensate, result analyse
- 5 Numerics Tools
- 6 MPI/Parallel
- 7 Exercices
- 8 No Linear Problem
- 9 Technical Remark on freefem++



1 Introduction

2 Tools

3 Academic Examples

4 Bose Einstein Condensate, result analyse

5 Numerics Tools

6 MPI/Parallel

7 Exercises

8 No Linear Problem



FreeFem++ is a software to solve numerically partial differential equations (PDE) in \mathbb{R}^2 , \mathbb{R}^3 , on **Curve** or on **surface** with finite elements methods. We used a domain-specific language (DSL) to set and control the problem. The FreeFEM language allows for a quick specification of linear PDE's, with the variational formulation of a **linear steady state problem** and the user can write their own script to solve no linear problem and time depend problem. You can solve coupled problem, problem with moving domain, eigenvalue problem, do mesh adaptation , compute error indicator, etc ...

By the way, FreeFEM is built to play with abstract linear, bilinear form on Finite Element Space and interpolation operator.

FreeFem++ is a freeware and runs on Mac, Unix and Windows architecture, in parallel with MPI.

To try it on your computer <https://www.ljll.math.upmc.fr/lehyaric/ffjs/>

Info: FreeFem++ solves a problem with $22 \cdot 10^9$ unknowns in 200 s on 12,000 proc (Thank to P. Jolivet).



1 Introduction

- The Team
- History
- The main characteristics
- In progress
- Basement
- Weak form



The team

Alpines/LJLL:

FH F. Hecht: responsable et dévelopeur principal (PR emeritus,SU ,Alpines, Math, Info,) 50%

PHT P.H. Tournier: dévelopeur FFDDM, BEM, (IR CNRS, LJLL, Alpines, Math, Info) 60%

PJ P. Jolivet: développeur HPDDM et interface PETSc/SELPc (CR. CNRS, Info) 20%

FN F. Nataf: Méthode de decomposition de Domaine: HPDDM, FFDDM (DR CNRS, Alpines, Math) 20%

GS G. Sadaka: Finite Volume (IR CNRS, LMRS, Math, Info) 20%

SL S. Legrand: responsable de integration continue (IR, Inria , SED) 40%

and O. Pironneau, A. Suzuki, ...



1 Introduction

- The Team
- History
- The main characteristics
- In progress
- Basement
- Weak form



- 1987 MacFem/PCFem the old ones (O. Pironneau in Pascal) no free.
- 1992 FreeFem rewrite in C++ (P1,P0 one mesh) O. Pironneau, D. Bernardi, F. Hecht (mesh adaptation , bamg) , C. Prudhomme .
- 1996 FreeFem+ rewrite in C++ (P1,P0 more mesh) O. Pironneau, D. Bernardi, F. Hecht (algebra of function).
- 1998 FreeFem++ rewrite with an other finite element kernel and new language ; F. Hecht, O. Pironneau, K.Ohtsuka.
- 1999 FreeFem 3d (S. Del Pino) , a first 3d version base on fictitious domaine method.
- 2008 FreeFem++ v3 use a new finite element kernel multidimensionnels: 1d,2d,3d...
- 2017 FreeFem++ v3.57 parallel version
- 2018 FreeFEM v4.1 New matrix type, Surface element (v4.2) , New Parallel tools ...
- 2024 FreeFEM v4.14 Surface element, Line Element, Composite Finite element, BEM (v4.10), PETSc/SLEPc interface v3.22 , DG on 3d and surf.



For what

- ① R&D
- ② Academic Research ,
- ③ Teaching of FEM, PDE, Weak form and variational form
- ④ Algorithmes prototyping
- ⑤ Numerical experimentation
- ⑥ Scientific computing and Parallel computing

For who: the researcher, engineer, professor, student...

A Community <https://community.freefem.org>

More than 3000 true Users (more than 1000 download / month)



1 Introduction

- The Team
- History
- The main characteristics
- In progress
- Basement
- Weak form



- Wide range of finite elements: continuous P1,P2 elements, discontinuous P0, P1, RT0,RT1,BDM1, elements ,Edge element, vectorial element, mini-element, ...
- Automatic interpolation of data from a mesh to an other one (with matrix construction if need), so a finite element function is view as a function of (x, y, z) or as an array.
- Definition of the problem (complex or real value) with the variational form with access to the vectors and the matrix.
- Discontinuous Galerkin formulation (2d , 3d , on curve and surface, in test).
- LU, Cholesky, Crout, CG, GMRES, UMFPACK, SuperLU, MUMPS , Dissection, PETSc. ... sparse linear solver; eigenvalue and eigenvector computation with ARPACK or SLEPc.
- Online graphics with OpenGL/GLUT/VTK, C++ like syntax.
- Javascript version (v3.50) works straight out of an HTML page, both online or offline (here).

- Analytic description of boundaries, with specification by the user of the intersection of boundaries in 2d.
- Automatic mesh generator, based on the Delaunay-Voronoi algorithm. (2d,3d (tetgen))
- load and save Mesh, solution
- Mesh adaptation based on metric, possibly anisotropic, with optional automatic computation of the metric from the Hessian of a solution. (2d, Surface,3d) (bamg, mmgs, mmg3d).
- Link with other soft: parview, gmsh , vtk, medit, gnuplot
- Dynamic linking to add plugin.
- Full MPI interface
- Nonlinear Optimisation tools: CG, Ipopt, NLOpt, stochastic
- Wide range of examples: Navier-Stokes 3d, elasticity 3d, fluid structure, eigenvalue problem, Schwarz' domain decomposition algorithm, residual error indicator ...



on Unix build a "yours.edp" or "yours.md" file with your favorite editor : vscode, emacs, vi, nedit, etc. Enter FreeFem++ yours.md , FreeFem++ yours.edp or FreeFem++ must be in one directory of your PATH shell variable. The tools md2edp is proved to change ".md" script in ".edp" script file.

on Window, MacOs X build a "yours.edp" file with your favorite text editor (raw text, not word text) : vscode, emacs, winedit, wordpad, textmate, bbedit, fraise ... and click on the icon of the application FreeFem++ and load you file via de open file dialog box or **drag and drop** the icon of your built file on the application FreeFem++ icon.



The Changes from dec. 2022 to dec. 2023

- Finite element BDM2 and BDM2ortho in test,
- Conversion of matrix or transpose of matrix in 'int[int][int]' array to get the structure of sparse matrix. see tutorial/sparse-matrix.edp example at end
- a meshL finite function can be see as real function with 1, or 2 parameters
- Exemple to code convolution of 2 function see tutorial/Convolution-Sample.edp example
- Support for dense blocks in PETSc matrices
- GenEO for saddle-point examples with PCHPDDM in PETSc
- Distributed ParaView output on 'meshS'
- Interface to 'mmg2d' for two-dimensional 'mesh'
- Support for Mmg parameters 'localParameter', '-nosizreq', -hgradreq'
- Composite FE spaces and variational forms for coupled problems:
- can now define composite FE spaces with different meshes/mesh types
- coupled problems using composite FE spaces, or directly with '<' '>' syntax: see 'examples/stokes_composite.edp' or 'examples/stokes_periodic_composite.edp' this can be used for FEM-BEM coupling see 'examples/bem/Helmholtz-2d-FEM-BEM-coupling-MUMPS-composite.edp' with Ø PETSc , see 'examples/hpddm/Helmholtz-2d-FEM-BEM-coupling-PETSc-composite.edp'
- remove spurious cout in Curve/Line DG definition.
- add New Finite element 2d on mesh : RT0dc (discontinuous RT0) in plugin Element_Mixte see example plugin/RT0dc.edp and P1nc (Crouziex-Raviart) + bulle : name P1bnc in plugin Element_P1ncdc and P1nc totali discontinous + bulle ; name P1bdcnc in plugin Element_P1ncdc see example plugin/examples/testp1dcnc.edp form akram.beni-hamad@inria.fr
- add New finite element: P4S P⁴ on meshS , P3pnc3d in Element_P3pnc_3d (Crouziex-Raviart with P3) see loic.bałaziatchynillama@cea.fr for more information.
- add new interface for metis (see examples/plugin/metis.edp)
- Correct jump, mean, otherside of finite element function on mesh3, meshS, meshL
- try to build dmrg install mac version
- add file script to build meshS from boundary meshL TL, see example in examples/3dSurf/buildmeshS.edp
- add sparse block to sparse matrix



The Changes from dec. 2023 to dec. 2024

- move the plugin msh3 in kernel , so we remove all `load "msh3"` in all examples and .edp file
- read binary file with short number in bfstream plugin
- 3d case in ClosePoints plugin : function `Voisinage3`, `ClosePoints3`
- `real[int,int] at=A'`;
- Powell Sabin 'splittmesh6PowellSabin(Th)' and Worsey Farin 'splittmesh12WorseyFarin(Th3)' splitting for Scott–Vogelius lowest Stokes Element in 2D,3D
- interface with functional interface with 'fgmres' (Linear and affine) in real and complex case
- Finite element 'BDM2' and 'BDM2ortho' in test, Bug in BDM2ortho
- try to fix orientation of internal edges in 2d.
- fix missing break and continue in `for [i,ai:a]` loop
- line number in macro error (thank to P-H Tournier)
- fix problem integration of moving test or unknown function in 2d mesh:
- Conversion of matrix or transpose of matrix in `int[int][int]` array to get the structure of sparse matrix.
- a meshL finite function can be see as real function with 1, or 2 parameters
- Exemple to code convolution of 2 function with one with a small support too be not to expensive see tutorial/Convolution-Sample.edp example
- tool to put FreeFEM code in Markdown file (with suffix .md) to mixte in same file comment and code.
- Support for dense blocks in PETSc matrices
- GenEO for saddle-point examples with PCHPDDM in PETSc
- Distributed ParaView output on 'meshS'
- Interface to 'mmg2d' for two-dimensional 'mesh'
- Support for Mmg parameters '-localParameter', '-nosizreq', '-hgradreq'
- fix problem in mesh of ring from a square (missing option to remove duplicate vertices)
- problem of segfalse in Write_hdf5 if the mesh2 is too large.
- fix `(A' +A)`
- correct integer overflow (in rare case) when calling INTER_SEG1d use in interpolation on Th3,ThS, ThL.
- correct hidden faces on surface mesh (ffglut)
- remove optimisation flag ppm2rnm.cpp in macos (load trap)
- correct abcisse curviline on reparametrage function (setcurveabcisse) in load "Curvature"
- correct compilation on ARM sonoma xcode 15.2
- correct mpi essai.edp MPI_ANY_SOURCE Pb.
- bug in P3pnc3d in vectorial case (thank to loic.balaziatchynillama@cea.fr)
- in `segment(10,region=1,label=11); region is`



1 Introduction

- The Team
- History
- The main characteristics
- In progress
- Basement
- Weak form



In progress (Near futur or not)

- to get the last develop Version 4.15, do:
git clone -b develop https://github.com/FreeFem/FreeFem-sources ff++
- Mesh intersection of get conservative formulation in 2d
- fast interpolation on Surface and Line Mesh, (done, bug no so fast !!!!)
- New graphics interface , (too slow progress)
- Element on curve and Surface (Ok)
- BEM method a correct version (see J. Morice and P-H Tournier, in very good progress)
- DG in 3d, surface, curve
- cmake (????)
- rewrite of sparse matrix kernel (Done) (⇒ new GMRES, new CG, ...), done.
- coupling 3d, surface Finite element and BEM (in progress)
- rewrite of the Finite element kernel for isoparametric FE and to be able to mixte surface FE and 3d FE (in futur).
- debugger (client-server graphics services) (Good idea but technical)
- more general problem (in progress)
- OpenMP interface ???
- Quadruple precision floating type (see A. Suzuki)

P-H Tournier get ERC Synergy funded project : Phase-space-inspired Numerical Methods for High Frequency Wave Scattering (PSINumScat) (see
<https://psinumscat.com>



ERC Synergy Grant

PSINumScat

Phase Space Inspired Numerical Methods for High-Frequency Scattering

Jeffrey Galkowski

Euan Spence

Pierre-Henri Tournier

University College London


University of Bath

CNRS



What is the scientific challenge?

Acoustic and electromagnetic waves are ubiquitous in everyday technologies.

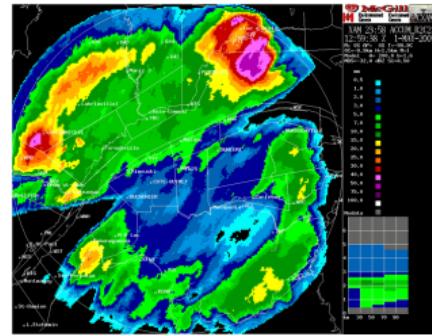

The design of accurate, fast, and reliable algorithms for computing high-frequency waves is a long-standing problem.

See P-H Tournier for more detail.

1 Introduction

- The Team
- History
- The main characteristics
- In progress
- **Basement**
- Weak form



Element of syntax : the script is like in C/C++

First FreeFem++ is a compiler and after it launch the create code (a kind of byte code). The language is polymorphe but it is not an objet oriented language.

The key words are reserved and the operator are like in C except for: ^ & |

+ - * / ^ // $a^b = a^b$
== != < > <= >= & | // $a|b \equiv a \text{ or } b, a\&b \equiv a \text{ and } b$
= += -= /= *=

BOOLEAN: 0 \Leftrightarrow `false`, $\neq 0 \Leftrightarrow$ `true` = 1

Automatic cast for numerical value : bool, int, reel, complex

```
func heavyside = real(x>0.);  
string two=2; int i2 = atoi(two);
```

```
for (int i=0;i<n;i++) { ... ;}  
if ( <bool exp> ) { ... ;} else { ... ;};  
while ( <bool exp> ) { ... ;}  
break continue key words
```

weakness: all local variables are almost static, so no recursion in function (????))

bug if break before variable declaration in same block.

bug in function argument of fespace value.



Element of syntax: special word for finite element

```
x,y,z                                     // current coord.  
label, region  
N.x, N.y, N.z,                // P0 normal to the border (not normal of Surf and Line)  
Ns.x, Ns.y, Ns.z,           // P0 normal to the surface in case of MeshS (surface in 3d)  
Tt.x, Tt.y, Tt.z,           // P0 tangent to the line in case of MeshL (line in 3d)  
  
int i = 0;                                // an integer  
real a=2.5;                               // a reel  
bool b=(a<3.);  
real[int] array(10) ;                      // a real array of 10 value  
mesh Th; mesh3 Th3; meshS ThS; meshL ThL; // 2d, 3d, surface, line meshes.  
fespace Vh(Th,P2);                        // Def. of 2d finite element space;  
fespace Vh3(Th3,P1);                      // Def. of 3d finite element space;  
fespace VhS(ThS,P1);                      // Def. of surface finite element space;  
fespace VhL(ThL,P1);                      // Def. of line finite element space;  
Vh u=x;                                    // a finite element function or array  
Vh3<complex> uc = x+ 1i *y;             // complex valued FE  
u(.5,.6,.7);                            // value of FE function u at point (.5,.6,.7)  
u[];                                      // the array of DoF value assoc. to FE function u  
u[][5];                                    // 6th value of the array (numbering begin  
                                         // at 0 like in C)
```



```
fespace V3h(Th, [P2,P2,P1]);
V3h [u1,u2,p]=[x,y,z]; // a vectorial finite element
// function or array
// remark u1[] <==> u2[] <==> p[] same array of unknown.
macro div(u,v) (dx(u)+dy(v)) // EOM a macro
// (like #define in C )
macro Grad(u) [dx(u),dy(u)] // the macro end with //
varf a([u1,u2,p],[v1,v2,q])=
int2d(Th)(Grad(u1)'*Grad(v1)+Grad(u2)'*Grad(v2)
-div(u1,u2)*q -div(v1,v2)*p
+on(1,2,u1=g1,u2=g2);

matrix A=a(V3h,V3h,solver=UMFPACK);
real[int] b=a(0,V3h);
u2[] =A^-1*b; // or you can put also u1[] = or p[].
```



Element of syntax: matrix and vector tools

```
func Heaveside=(x>0);           // a formal line function
func real g(int i, real a) { .....; return i+a;}
A = A + A'; A = A'*A           // matrix operation (only 1/1)
A = [ [ A,0],[0,A' ] ];        // Block matrix.
int[int] I(15),J(15);         // two array for renumbering
// the aim is to transform a full matrix into a sparse matrix
matrix B;
B = A;                         // copie matrix A
B=A(I,J);                      // B(i,j) = A(I(i),J(j))
B=A(I^-1,J^-1);                // B=0; B(I(i),J(j))+= A(i,j)
B.resize(10,20);                // resize the sparse matrix
                                // and remove out of bound terms
int[int] I(1),J(1); real[int] C(1);
[I,J,C]=A;                     // get of the sparse term of the matrix A
                                // (the array are resized)
A=[I,J,C];                    // set a new matrix
matrix D=[diagofA] ;            // set a diagonal matrix D
                                // from the array diagofA.
real[int] a=2:12;              // set a[i]=i+2; i=0 to 10.
```



a formal array is [exp1, exp1, ..., expn]

the Hermitian transposition is [exp1, exp1, ..., expn]'

```
complex a=1,b=2,c=3i;
func va=[ a,b,c];                                //      is a formal array in [ ]
a =[ 1,2,3i]'*va ; cout << a << endl;          //      Hermitian product
matrix<complex> A=va*[ 1,2,3i]'; cout << A << endl;
a =[ 1,2,3i]'*va*2.;
a =(va+[ 1,2,3i])'*va*2.;

va./va;                                         //      term to term /
va.*va;                                         //      term to term *
trace(va*[ 1,2,3i]') ;                         //
(vax*[ 1,2,3i]')[1][2] ;                      //      get coef
det ([[1,2],[-2,1]]);                          //      just for matrix 1x1 et 2x2
usefull macro to def your edp.

macro grad(u) [dx(u),dy(u)] //
macro div(u1,u2) (dx(u1)+dy(u2)) //
```



List of Plugin

```
cd /Applications/FreeFem++.app/Contents/ff-4.12/lib/ff++/4.12/1  
  
BEC.so           FreeFemQA.so       ff-AiryBiry.so    metis.so  
BernardiRaugel.so Helmholz_FD.so   ff-Ipopt.so      mmg.so  
BinaryIO.so      IncompleteCholesky.so ff-NLOpt.so     mmg3d-v4.0.so  
CircumCenter.so MUMPS.so          ff-cmaes.so     mshmet.so  
ClosePoints.so   MUMPS_seq.so     ff-mmap-semaphore.so myfunction.so  
Curvature.so    MatD-VFP0.so    ffnewuo.a.so   myfunction2.so  
DxWriter.so     MatrixMarket.so ffrandom.so     pcm2rnm.so  
Element_HCT.so  MetricKuate.so   freeyams.so    pipe.so  
Element_Mixte.so MetricPk.so      funcTemplate.so plotPDF.so  
Element_Mixte3d.so Morley.so       geophysics.so ppm2rnm.so  
Element_P1lbl.so NewSolver.so    gmsh.so        qfl1to25.so  
Element_P1dc1.so SaveHB.so       gsl.so         scotch.so  
Element_P1ncdc.so Schur-Complement.so ilut.so       shell.so  
Element_P2bulle3.so SuperLu.so     iohdf5.so     splitedges.so  
Element_P2pnc.so UMFPACK64.so   ioplay.so     splitmesh12.so  
Element_P2pnc_3d.so VTK_writer.so  iovtk.so      splitmesh3.so  
Element_P3.so    VTK_writer_3d.so isoline.so    splitmesh4.so  
Element_P3dc.so  addNewType.so   lapack.so     splitmesh6.so  
Element_P3nc.so  aniso.so       lgbmo.so      tetgen.so  
Element_P3pnc.so bfstream.so    mat_dervieux.so vortextools.so  
Element_P4.so    biofunc.so    mat_edgeP1.so  
Element_P4dc.so  dfft.so        mat_psi.so  
Element_PkEdge.so distance.so   medit.so  
Element_QF.so   exactpartition.so meshtools.so
```



Important Plugin

- qf11to25 add more quadrature formulae in 1d , 2d, 3d and tools to build own quadrature
- Element_*,Morlay,BernadiRaugel add new kind finite element
- UMFPACK64,SuperLu,MUMPS_seq add sequential sparse solver
- metis,scotch mesh Partitioning
- ffrandom true random number generator: srandomdev,srandom, random
- gsl the gsl lib interface (lot of special function, and random generator)
- shell,pipe directory and file interface, pipe interface
- dfft interface with fftw3 library for FFT.
- **tetgen** tetgen interface now
- lapack a small interface with lapack library of full linear solver, and full eigen value problem.
- ff-Ipopt interface with Ipopt optimisation software
- ppm2rnm interface with ppm library to read ppm bitmap.
- isoline build a border from isoline.
- distance build a the signed distance approximation to an isoline in 2d and 3d (not on surface or curve).
- mmg, mshmet, medit interface of library of P. Frey to adapt mesh, build metric, plot in 3d, .

Remark: **msh3** tools for 3d mesh, surface mesh, line mesh is now in the KERNEL



- HPDDM a parallel linear solver see diffusion-2d.edp example in examples++-hpddm
- PETSc a version of PETSc real interface
- SLEPC a version of SLEPc real interface (include PETSc)
- PETSc-complex a version of complex PETSc interface
- SLEPC-complex a version of complex SLEPc interface (include PETSc-complex)
- MUMPS_mpi a MUMPS interface with mpi
- parmmg a version of parmmg parallel interface of parmmg library
- MPICG a basic parallel version of CG, and GMRES
- mpi-cmaes Ⓡ parallel version of stochastic optimization algorithm.



1 Introduction

- The Team
- History
- The main characteristics
- In progress
- Basement
- Weak form



Laplace (Poisson) equation, weak form

Let a domain Ω with a partition of $\partial\Omega$ in Γ_2, Γ_e .

Find u a solution in such that:

$$-\Delta u = 1 \text{ in } \Omega, \quad u = 2 \text{ on } \Gamma_2, \quad \frac{\partial u}{\partial \vec{n}} = 0 \text{ on } \Gamma_e \quad (1)$$

Denote $V_g = \{v \in H^1(\Omega) / v|_{\Gamma_2} = g\}$.

The Basic variationnal formulation with is: find $u \in V_2(\Omega)$, such that

$$\int_{\Omega} \nabla u \cdot \nabla v = \int_{\Omega} 1v + \int_{\Gamma} \frac{\partial u}{\partial n} v, \quad \forall v \in V_0(\Omega) \quad (2)$$

The finite element method is just: replace V_g with a finite element space, and the FreeFem++ code:



Poisson equation in a fish with FreeFem++

The finite element method is just: replace V_g with a finite element space, and the FreeFem++ script:

```
mesh3 Th("fish-3d.msh");                                // read a mesh 3d
fespace Vh(Th,P1);                                     // define the P1 EF space

Vh u,v;                                              // set test and unknown function in Vh.
macro Grad(u) [dx(u),dy(u),dz(u)]                  // EOM Grad def
solve laplace(u,v,solver=CG) =
  int3d(Th)( Grad(u)'*Grad(v) )
  - int3d(Th) ( 1*v)
  + on(2,u=2);                                         // int on  $\gamma_2$ 
plot(u,fill=1,wait=1,value=0,wait=1);
```

Run:fish.edp Run:fish3d.edp



Eigen vector of Laplace Beltrami on Torus

Let S a surface (here a torus), we want to compute the Eigen value of Laplace Beltrami operator, plot the Eigen vector as the deformation of the surface on the direction of the normal.

The variational form is: find (u_λ, λ) such than

$$\int_S \nabla_S u \cdot \nabla_S v = \lambda \int_S uv \quad (3)$$

where ∇_S is the tangential gradient and at discret level the basic function are constant in normal direction, so $\nabla_S \equiv \nabla$.

remark: Now in FreeFEM the word `Ns` is a global variable to get the normal at surface mesh (a constant by triangle).

To plot the solution, I propose to deform the surface with vector $u_\lambda N_h$ where N_h is a P_1 approximation of the the unit normal of S (L^2 projection of the normal) .

Run:`LapEigenBeltrami.edp`



New example: Composite Stokes P2-iso-P1,P1

```
macro grad(u) [dx(u),dy(u)] //
macro Grad(u1,u2) [ grad(u1), grad(u2)] //
macro div(u1,u2) (dx(u1)+dy(u2)) //
int nn = 30; // number of edge in each direction
mesh Th=square(nn,nn,[2*pi*x,2*pi*y],flags=3);
mesh ThP=Th; // Pressure mesh
mesh ThU=trunc(ThP,1,split=2); // Velocity mesh

fespace Uh(ThU,[P1,P1]); fespace Ph(ThP,P1);

Uh [u1,u2],[v1,v2];
Ph p,q;

solve Stokes (<[u1,u2],[p]>,<[v1,v2],[q]>) = int2d(ThU)(Grad(
    u1,u2):Grad(v1,v2))
+ int2d(ThU)( - div(u1,u2)*q - div(v1,v2)*p )
+ int2d(ThP)( -1e-10*p*q )
+ on(1,2,3,4,u1=label==3,u2=0);
```

Run:stokes_composite.edp



1 Introduction

2 Tools

3 Academic Examples

4 Bose Einstein Condensate, result analyse

5 Numerics Tools

6 MPI/Parallel

7 Exercises

8 No Linear Problem



2 Tools

- Important Remark

- What is a Finite element in FreeFem++
- Remarks on weak form and boundary conditions
- Mesh generation
- Build mesh from image
- 3d mesh
- Mesh tools
- Anisotropic Mesh adaptation
- 3d adaptation process



Important remark: on geometrical item label and region

- All boundary (internal or not) was define through a label number and this number is define in the mesh data structure. The support of this label number is a edge in 2d or Surface meshes and a face in 3d meshes, **so FreeFem++ never use label on vertices**, then it is not easy to set a boundary condition on one point. See example: 3d/Elasticity-simple-support-BC.edp.
- To defined integration you can use the region (resp. label) number if you compute integrate in domain (resp. boundary). They are no way to compute 1d integral on 3d mesh.
- But you have Finite Element defined on surface or curve (new in v4.5) .
- You can put list of label or region in integer array (int [int]).



2 Tools

- Important Remark
- **What is a Finite element in FreeFem++**
- Remarks on weak form and boundary conditions
- Mesh generation
- Build mesh from image
- 3d mesh
- Mesh tools
- Anisotropic Mesh adaptation
- 3d adaptation process



What is a Finite element in FreeFem++

TO DO ...



2 Tools

- Important Remark
- What is a Finite element in FreeFem++
- **Remarks on weak form and boundary conditions**
- Mesh generation
- Build mesh from image
- 3d mesh
- Mesh tools
- Anisotropic Mesh adaptation
- 3d adaptation process



Remark on varf

The functions appearing in the variational form parameter are formal and local to the varf definition, the only important think is the order in the parameter list, like in

```
varf vb1([u1,u2],[q]) = int2d(Th)( (dy(u1)+dy(u2)) *q)
                                +int2d(Th)(1*q) + on(1,u1=2);
varf vb2([v1,v2],[p]) = int2d(Th)( (dy(v1)+dy(v2)) *p)
                                +int2d(Th)(1*p) ;
```

To build matrix A from the bilinear part the the variational form a of type varf do simply

```
matrix B1 = vb1(Vh,Wh [, ...] );
matrix<complex> C1 = vb1(Vh,Wh [, ...] );
//      where the fespace have the correct number of comp.
//      Vh is "fespace" for the unknown fields with 2 comp.
//      ex fespace Vh(Th,[P2,P2]); or fespace Vh(Th,RT);
//      Wh is "fespace" for the test fields with 1 comp.
```

To build a vector, put $u1 = u2 = 0$ by setting 0 of on unknown part.

```
real[int] b = vb2(0,Wh);
complex[int] c = vb2(0,Wh);
```

Remark: In this case the mesh use to defined , \int, u, v can be different, but pay attention to the case of discontinuous function a quadrature point (unknown value) .



The boundary condition terms

First FreeFem++ use only the label number of edge (2d) or faces (3d).

- An "on" scalar form (for Dirichlet) : `on(1, u = g)`

The meaning is for all degree of freedom i (DoF) of this associated boundary, the diagonal term of the matrix $a_{ii} = \text{tgv}$ with the *terrible giant value* tgv ($=10^{30}$ by default) and the right hand side $b[i] = "(\Pi_h g)[i]" \times \text{tgv}$, where the " $(\Pi_h g)[i]$ " is the boundary DoF value given by the interpolation of g .

- An "on" vectorial form (for Dirichlet) : `on(1, u1=g1, u2=g2)` If you have vectorial finite element like RT0, the 2 components are coupled, and so you have :

$b[i] = "(\Pi_h(g1, g2))[i]" \times \text{tgv}$, where Π_h is the vectorial finite element interpolant.

- a linear form on Γ (for Neumann in 2d)

`-int1d(Th) (f*w) or -int1d(Th, 3) (f*w)`

- a bilinear form on Γ or Γ_2 (for Robin in 2d)

`int1d(Th) (K*v*w) or int1d(Th, 2) (K*v*w)`.

- a linear form on Γ (for Neumann in 3d)

`-int2d(Th) (f*w) or -int2d(Th, 3) (f*w)`

goto mortar: 2



2 Tools

- Important Remark
- What is a Finite element in FreeFem++
- Remarks on weak form and boundary conditions
- **Mesh generation**
- Build mesh from image
- 3d mesh
- Mesh tools
- Anisotropic Mesh adaptation
- 3d adaptation process



Build Mesh 2d

First a 10×10 grid mesh of unit square $[0, 1]^2$

```
int[int] labs=[10,20,30,40];           // bot., right, top, left
mesh Th1 = square(10,10,label=labs,region=0,[x,y]);           //
plot(Th1,wait=1);
int[int] old2newlabs=[10,11, 30,31];           // 10 -> 11, 30 -> 31
Th1=change(Th1,label=old2newlabs);           //
// do Change in 2d or in 3d. region=a, fregion=f ,
// flabel=f
```

a L shape domain $[0, 1]^2 \setminus [\frac{1}{2}, 1]^2$

```
mesh Th = trunc(Th1,(x<0.5) | (y < 0.5),label=1);           //
plot(Th,cmm="Th");
mesh Thh = movemesh(Th,[-x,y]);
mesh Th3 = Th+movemesh(Th,[-x,y]);           // glumesh ...
plot(Th3,cmm="Th3");
```

Run:mesh1.edp



Build Mesh 2d, border

a Circle with or without an hole ;

Remark; by default the domain is a left of the border (if the number segment is positive otherwise at right).

```
border Co(t=0,2*pi) { x=cos(t); y=sin(t); label=1; }
border Ci(t=0,2*pi) { x=cos(t)/2; y=sin(t)/2; label=2; }
plot(Co(30)+Ci(15),wait=1);
mesh Thf=buildmesh(Co(30)+Ci(15));           //      without hole
                                                //      two region:
cout << " The two Region of Thf : " << Thf(0,0).region << " "
      << Thf(0,0.9).region << endl;
plot(Thf,wait=1,cmm="Thf");
mesh Thh=buildmesh(Co(30)+Ci(-15));           //      without hole
plot(Thh,wait=1,cmm="Thh"));
```

Get a extern mesh

```
mesh Th2 ("april-fish.msh");
build with emc2, bamg, modulef, etc...
```

Run:mesh-circles.edp



Build Mesh 2d, more complicate with implicit loop

a L shape domain $]0,1[^2 \setminus [\frac{1}{2}, 1[^2$ with 6 multi-borders.

```
int nn=30; real dd=0.5;
real[int,int] XX=[[0,0],[1,0],[1,dd],[dd,dd],[dd,1],[0,1]];
int[int] NN=[nn,nn*dd,nn*(1-dd),nn*(1-dd),nn*dd,nn];
border bb(t=0,1;i)
{
    // i is the index of the multi border loop
    int ii = (i+1)%XX.n; real t1 = 1-t;
    x = XX(i,0)*t1 + XX(ii,0)*t;
    y = XX(i,1)*t1 + XX(ii,1)*t;
    label = 1; ;
}
plot(bb(NN),wait=1);
mesh Th=buildmesh(bb(NN));
plot(Th,wait=1);
Run:mesh-multi.edp
```



2 Tools

- Important Remark
- What is a Finite element in FreeFem++
- Remarks on weak form and boundary conditions
- Mesh generation
- **Build mesh from image**
- 3d mesh
- Mesh tools
- Anisotropic Mesh adaptation
- 3d adaptation process



Build mesh from image 1/2

```
load "ppm2rnm" load "isoline" load "shell"
string lac="lock-ness", lacjpg =lac+".jpg", lacpgm =lac+".pgm";
if(stat(lacpgm)<0) exec("convert "+lacjpg+" "+lacpgm);
real[int,int] Curves(3,1); int[int] be(1); int nc;
{
    real[int,int] ff1(lacpgm); // read image
    int nx = ff1.n, ny=ff1.m; // grey value in 0 to 1 (dark)
    mesh Th=square(nx-1,ny-1,[(nx-1)*(x),(ny-1)*(1-y)]);
    fespace Vh(Th,P1); Vh f1; f1[] = ff1; // array to fe function.
    real iso =0.08; // try some value to get correct iso
    real[int] viso=[iso];
    nc=isoline(Th,f1,iso=iso,close=0,Curves,beginend=be,
               smoothing=.1, ratio=0.5);
    for(int i=0; i<min(3,nc);++i)
    { int i1=be(2*i),i2=be(2*i+1)-1;
      plot(f1,viso=viso,[Curves(0,i1:i2),Curves(1,i1:i2)],
            wait=1,cmm=i); }
}
```



Build mesh from image 2/2

```
int[int] iii=[0];                                // chose to componant ...
int[int] NC=[-500];                             // 1 componant
border G(t=0,1;i) {
P=Curve(Curves,be(2*iii[i]),be(2*iii[i]+1)-1,t);
label= iii[i];}

plot(G(NC),wait=1);
mesh Th=buildmesh(G(NC));
plot(Th,wait=1);
real scale = sqrt(AreaLac/Th.area);
Th=movemesh(Th,[x*scale,y*scale]);
```



Run:`lac.edp` (the Ali-Bouchta lac close to Kenitra)

2 Tools

- Important Remark
- What is a Finite element in FreeFem++
- Remarks on weak form and boundary conditions
- Mesh generation
- Build mesh from image
- 3d mesh
 - Mesh tools
 - Anisotropic Mesh adaptation
 - 3d adaptation process



A cube with cube or buildlayer (simple)

```
load "msh3"                                // buildlayer
mesh3 Th;
int nn=10;
if(1) { int[int] ll=[1,1,1,1,1,2];
//    y=0:front, x=1:right, y=1:back, x=0:left, z=0:down, z=1:up
Th=cube(nn,nn,nn,label=ll); }
// Warning bug if no parameter label=ll before version 3.56-1

Th= trunc(Th, ((x<0.5) | (y< 0.5) | (z<0.5)),label=3);
// remove 1/2 cube
plot("cube",Th);
Run:Cube.edp
```



3D layer mesh of a Lac with buildlayer

```
load "msh3"//      buildlayer
load "medit"//      medit
int nn=5;
border cc(t=0,2*pi){x=cos(t);y=sin(t);label=1;}
mesh Th2= buildmesh(cc(100));
fespace Vh2(Th2,P2);
Vh2 ux,uz,p2;
int[int] rup=[0,2], rdown=[0,1], rmid=[1,1];
func zmin= 2-sqrt(4-(x*x+y*y));    func zmax= 2-sqrt(3.);
//      we get nn*coef layers
mesh3 Th=buildlayers(Th2,nn,
                      coef= max((zmax-zmin)/zmax,1./nn),
                      zbound=[zmin,zmax],
                      labelmid=rmid, labelup = rup,
                      labeldown = rdown);           //      label def
medit("lac",Th);
Run:Lac3d.edp Run:3d-leman.edp
```



a 3d axi Mesh with buildlayer

```
func f=2*( (.1+((x/3))*(x-1)*(x-1)/1+x/100))^ (1/3.)-(.1)^ (1/3.));
real yf=f(1.2,0);
border up(t=1.2,0.) { x=t;y=f;label=0; }
border axe2(t=0.2,1.15) { x=t;y=0;label=0; }
border hole(t=pi,0) { x= 0.15 + 0.05*cos(t);y= 0.05*sin(t);
    label=1; }
border axe1(t=0,0.1) { x=t;y=0;label=0; }
border queue(t=0,1) { x= 1.15 + 0.05*t; y = yf*t; label =0; }
int np= 100;
func bord= up(np)+axe1(np/10)+hole(np/10)+axe2(8*np/10)
    + queue(np/10);
plot( bord);                                     //      plot the border ...
mesh Th2=buildmesh(bord);                      //      the 2d mesh axi mesh
plot(Th2,wait=1);
int[int] l23=[0,0,1,1];
Th=buildlayers(Th2,coef= max(.15,y/max(f,0.05)), 50
, zbound=[0,2*pi],transfo=[x,y*cos(z),y*sin(z)]
, facemerge=1,labelmid=l23);
```

Run:3daximesh.edp



boundary mesh of a Sphere

```
load "tetgen"
mesh Th=square(10,20,[x*pi-pi/2,2*y*pi]);           //      ]-pi/2,-pi/2[ x]0,2pi[
func f1 =cos(x)*cos(y); func f2 =cos(x)*sin(y); func f3 = sin(x);
//      the partiel derivative of the parametrization DF
func f1x=sin(x)*cos(y);   func f1y=-cos(x)*sin(y);
func f2x=-sin(x)*sin(y);   func f2y=cos(x)*cos(y);
func f3x=cos(x);          func f3y=0;
//      M = DF^t DF
func m11=f1x^2+f2x^2+f3x^2;   func m21=f1x*f1y+f2x*f2y+f3x*f3y;
func m22=f1y^2+f2y^2+f3y^2;
func perio=[[4,y],[2,y],[1,x],[3,x]];
real hh=0.1/R; real vv= 1/square(hh);
Th=adaptmesh(Th,m11*vv,m21*vv,m22*vv,IsMetric=1,periodic=perio);
int[int] ref=[0,L]; //      the label of the Sphere to L ( 0 -> L)
mesh3 ThS= movemesh23(Th,transfo=[f1*R,f2*R,f3*R],orientation=1,
label=ref);
```

Run:`Sphere.edp` Run:`sphere6.edp`



Build 3d Mesh from boundary mesh

```
include "MeshSurface.idp"           //      tool for 3d surfaces meshes
mesh3 Th;
try { Th=readmeshS("Th-hex-sph.mesh"); }           // try to read
catch(...) { // catch a reading error so build the mesh...
    real hs = 0.2;                                // mesh size on sphere
    int[int] NN=[11,9,10];
    real [int,int] BB=[[-1.1,1.1],[-.9,.9],[-1,1]]; // Mesh Box
    int [int,int] LL=[[1,2],[3,4],[5,6]];           // Label Box
    meshS ThHS = SurfaceHex(NN,BB,LL,1)+Sphere(0.5,hs,7,1); // surface meshes
    real voltet=(hs^3)/6.;                         // volume mesh control.
    real[int] domaine = [0,0,0,1,voltet,0,0,0.7,2,voltet];
    Th = tetg(ThHS,switch="pqaAAYYQ",
              nbofregions=2,regionlist=domaine);
    savemesh(Th,"Th-hex-sph.mesh"); }           // save for next run
```





Build a bottle boundary mesh I/II

```
load "msh3" load "medit" load "gsl" load "tetgen"
....
meshS Ths;                                     // the surface
{   meshes Th3c,Th3bottom, Th3top;
{   real[int,int] srneck=
[ [Htube-0.001,Htube,Htube+Hneck*0.1, Htube+Hneck*0.3 , Htube+Hneck*0.7 ,
Htube+Hneck*0.9, Htube+Hneck+0.1],
[Rext      ,Rext ,Rext      , Rext*.7+Rneck*.3 , Rext*.1 + Rneck*.9,
Rneck      , Rneck ]];
gslspline rneck(gslicterpcsplines,rneck);      // Curve of neck of the bottle
                                                       // adap mesh of get pretty mesh
mesh Th2c= square(Hbot/hh,2*pi*Rext/hh,[x*Hbot,y*2*pi]);
fespace V2x(Th2c,P1);
func E1 = rneck(x)*cos(y); func E2 = rneck(x)*sin(y); func E3 = x;
...
Th2c=adaptmesh(Th2c,em11,em21,em22,IsMetric=1,periodic=perio,nbvx=100000); }
Th2c=change(Th2c,fregion=labcyl);
Th3c = movemesh23(Th2c,transfo=[E1 , E2 , E3]);           // maillage exterieur
}
```



Image of the bottle and the worm screw

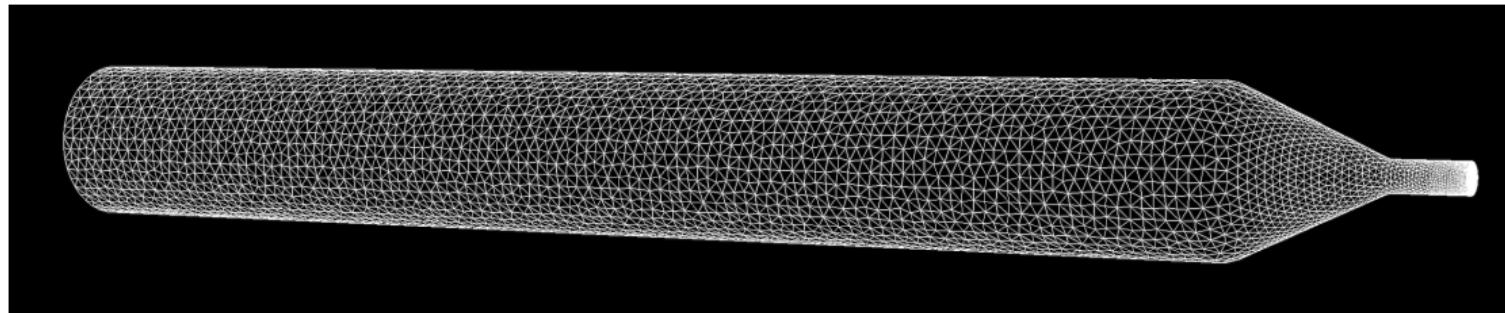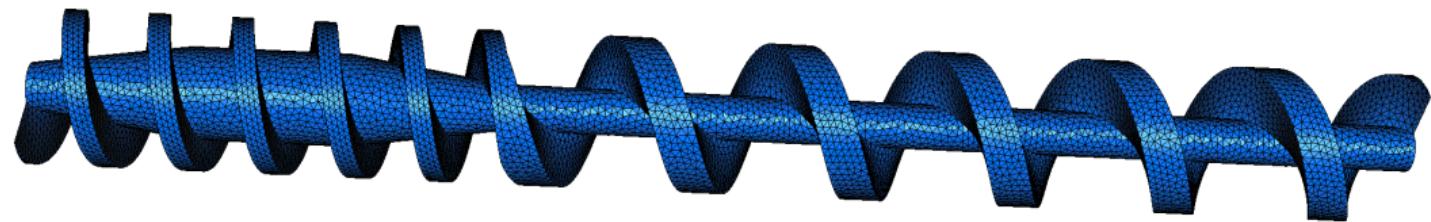

Build a bottle boundary mesh II/II

```
//      extraction of the border of the bottle
int[int] databoder(1);    int ncb= getborder(Th3c,databoder);
int ktop= Th3c(databoder[databoder[1]]).z < Th3c(databoder[databoder[0]]).z;
int kbot=1-ktop;           //      other border
...
macro DefBorder(bname,kk,Th3,bb,ll)
  int n#bname= bb[kk+1]-bb[kk];  border bname(t=bb[kk], bb[kk+1])
  {   real iv = int(t); if( iv == bb[kk+1]) iv = bb[kk];
      iv = bb[iv];x= Th3(iv).x ; y= Th3(iv).y ;label = ll;  }           //  EOM
DefBorder(btop,ktop,Th3c,databoder,1) DefBorder(bbot,kbot,Th3c,databoder,1)

Th3bottom=movemesh23(change(buildmesh(bbot (nbbot),fixeborder=1),fregion=labbottom)
                      ,transfo=[x,y,Zbot],orientation=-1);
Th3top=movemesh23(change(buildmesh(btop (-nbtop),fixeborder=1),fregion=labtop)
                     ,transfo=[x,y,Ztop],orientation=1);
Ths = Th3c + Th3bottom + Th3top; }

...
real[int] domaine = [0,0,Htube,1,hh^3/6.];
mesh3 Th=tetg(Ths,switch="pqaAYY",regionlist=domaine); medit ("Th",Th);
Run:bottle.edp                                         Run:mesh-vis-3d.edp
```



2 Tools

- Important Remark
- What is a Finite element in FreeFem++
- Remarks on weak form and boundary conditions
- Mesh generation
- Build mesh from image
- 3d mesh
- **Mesh tools**
- Anisotropic Mesh adaptation
- 3d adaptation process



Warning now the surface mesh type is meshS and not mesh3 as before version 4.01

- change to change label and region numbering in 2d and 3d, surface or line.
- movemesh checkmovemesh movemesh23 movemesh3 movemeshS
- triangulate (2d) , tetgconvexhull (3d) build mesh mesh for a set of point
- emptymesh (2d) built a empty mesh for Lagrange multiplier, use now meshL.
- mmgs to optimize surface mesh
- mmg3d to optimize volume mesh with constant surface mesh in version 4 (you can use le last version but to day you must used file to pass information).
- mshmet to compute metric
- isoline to extract isoline (2d)
- trunc to remove peace of mesh and split all element (2d,3d)
- splitmesh to split 2d mesh in no regular way.



2 Tools

- Important Remark
- What is a Finite element in FreeFem++
- Remarks on weak form and boundary conditions
- Mesh generation
- Build mesh from image
- 3d mesh
- Mesh tools
- **Anisotropic Mesh adaptation**
- 3d adaptation process



In Euclidean geometry the length $|\gamma|$ of a curve γ of \mathbb{R}^d parametrized by $\gamma(t)_{t=0..1}$ is

$$|\gamma| = \int_0^1 \sqrt{\langle \gamma'(t), \gamma'(t) \rangle} dt$$

We introduce the metric $\mathcal{M}(x)$ as a field of $d \times d$ symmetric positive definite matrices, and the length ℓ of Γ w.r.t \mathcal{M} is:

$$\ell = \int_0^1 \sqrt{\langle \gamma'(t), \mathcal{M}(\gamma(t))\gamma'(t) \rangle} dt$$


The key-idea is to construct a mesh where the lengths of the edges are close to 1 accordingly to \mathcal{M} . so \mathcal{M} become a user parameter.



The unit ball \mathcal{B}_M in a constant metric M plot the maximum mesh size on all the direction, and it is an ellipse.

If you we have two unknowns u and v , we just compute the metric M_u and M_v , find a metric M_{uv} call intersection with the biggest ellipse such that:

$$\mathcal{B}(M_v) \subset \mathcal{B}(M_u) \cap \mathcal{B}(M_v)$$

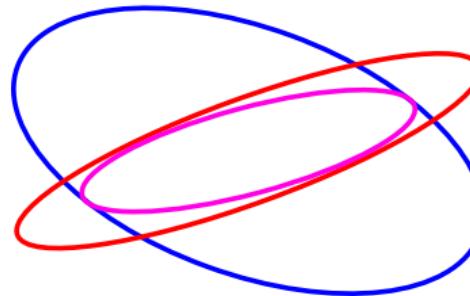


Under the assumption: if the mesh size is decreasing then the error also.

Example of mesh

$$u = (10x^3 + y^3) + \tanh(500(\sin(5y) - 2x)));$$

$$v = (10y^3 + x^3) + \tanh(5000(\sin(5y) - 2*)));$$


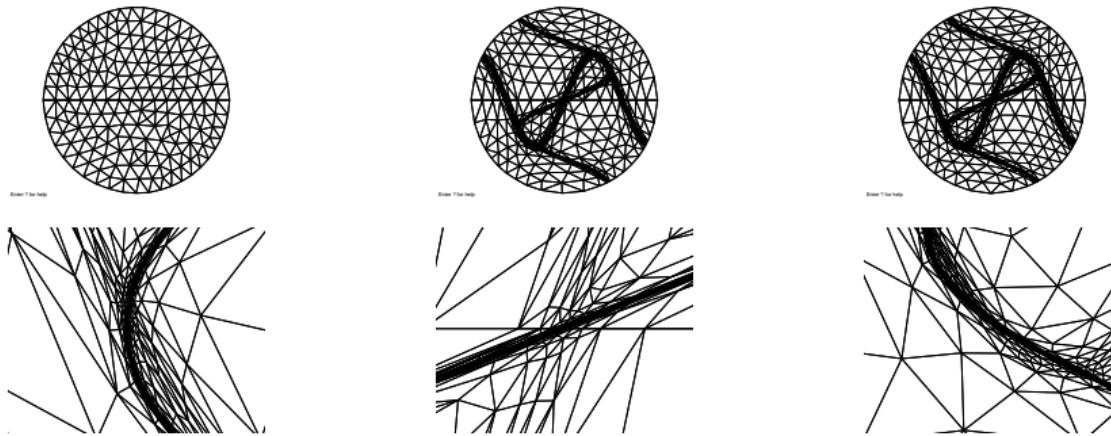


Run:Adapt-uv.edp

The domain is an L-shaped polygon $\Omega = [0, 1]^2 \setminus [\frac{1}{2}, 1]^2$ and the PDE is

Find $u \in H_0^1(\Omega)$ such that $-\Delta u = 1$ in Ω ,

The solution has a singularity at the reentrant angle and we wish to capture it numerically.

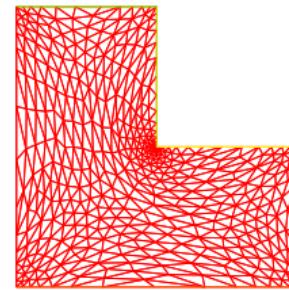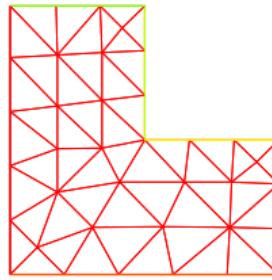

example of Mesh adaptation

FreeFem++ corner singularity program

```
int[int] lab=[1,1,1,1];
mesh Th = square(6,6,label=lab);
Th=trunc(Th,x<0.5 | y<0.5, label=1);

fespace Vh(Th,P1);           Vh u,v;           real error=0.1;
problem Probem1(u,v,solver=CG,eps=1.0e-6) =
    int2d(Th)( dx(u)*dx(v) + dy(u)*dy(v) )
    - int2d(Th)( v ) + on(1,u=0);
for (int i=0;i< 7;i++)
{ Probem1;                      // solving the pde
  Th=adaptmesh(Th,u,err,error,nbvx=100000);
                                      // the adaptation with Hessian of u
  plot(Th,u,wait=1,fill=1);        u=u;
  error = error/ (1000.^^(1./7.)) ; } ;
```

Run:CornerLap.edp



2 Tools

- Important Remark
- What is a Finite element in FreeFem++
- Remarks on weak form and boundary conditions
- Mesh generation
- Build mesh from image
- 3d mesh
- Mesh tools
- Anisotropic Mesh adaptation
- 3d adaptation process



Example of adaptation process in 3d with mmg3

Let a domain $\Omega =]0, 1[^3 \setminus [\frac{1}{2}, 1[^3$. The border of $\partial\Omega$ is split in 2 part

- Γ_2 , if $x = 1$, $y = 1$, or $z = 1$
- Γ_1 , else.

Find u a solution in such that:

$$\begin{aligned}-\Delta u &= 1 && \text{in } \Omega, \\ \frac{\partial u}{\partial \vec{n}} &= 0 && \text{on } \Gamma_2, \\ u &= 0 && \text{on } \Gamma_1.\end{aligned}$$

Thank to mmg v5 tools to do 3d mesh adaptation see

<http://www.mmgtools.org>.

without mmg (isotropic): [Run:Laplace-Adapt-3d.edp](#)

with mmg (anisotropic): [Run:Laplace-Adapt-aniso-3d.edp](#)



Build of the metric form the solution u in 2d

Optimal metric norm for interpolation error (function adaptmesh in freefem++) for P_1 continuous Lagrange finite element

- $L^\infty : \mathcal{M} = \frac{1}{\varepsilon} |\nabla \nabla u| = \frac{1}{\varepsilon} |\mathcal{H}|$ where $\mathcal{H} = \nabla \nabla u$
- $L^p : \mathcal{M} = \frac{1}{\varepsilon} |det(\mathcal{H})|^{\frac{1}{2p+2}} |\mathcal{H}|$ (result of F. Alauzet, A. Dervieux)

In Norm $W^{1,p}$, the optimal metric \mathcal{M}_ℓ for the P_ℓ Lagrange finite element, Optimal is given by (with only acute triangle) (thanks to J-M. Mirebeau)

$$\mathcal{M}_{\ell,p} = \frac{1}{\varepsilon} (det \mathcal{M}_\ell)^{\frac{1}{2p+2}} \mathcal{M}_\ell$$

and (see MetricPk plugin and function)

- for P_1 : $\mathcal{M}_1 = \mathcal{H}^2$ (for sub optimal case with acute triangle take \mathcal{H})

- for P_2 : $\mathcal{M}_2 = 3 \sqrt{\begin{pmatrix} a & b \\ b & c \end{pmatrix}^2 + \begin{pmatrix} b & c \\ c & a \end{pmatrix}^2}$ with

$$D^{(3)}u(x,y) = (ax^3 + 3bx^2y + 3cxy^2 + dy^3)/3!,$$

Run:adapt.edp

Run:AdaptP3.edp



1 Introduction

2 Tools

3 Academic Examples

4 Bose Einstein Condensate, result analyse

5 Numerics Tools

6 MPI/Parallel

7 Exercises

8 No Linear Problem



3 Academic Examples

- Laplace/Poisson
- Mortar Method
- Linear elasticity equation
- Stokes equation
- Heat equation with thermic resistance
- Optimize Time depend schema



We find p in H^1 , such that:

$$-\Delta p = f \text{ in } \Omega, \quad \partial_n p = g_n \text{ on } \Gamma.$$

This problem is defined through a constant and mathematically the problem is well pose iff $\int_{\Omega} f + \int_{\Gamma} g_n = 0$ and p is in H^1/\mathbb{R} . We can do a small regularization to remove this difficulty by find $p_\varepsilon \in H^1$ such that

$$\varepsilon p_\varepsilon - \Delta p_\varepsilon = f \text{ in } \Omega, \quad \partial_n p_\varepsilon = g_n \text{ on } \Gamma$$

This is trivial to approximate in FreeFem++:

```
Vh p,q; real eps=1e-8; // warning eps
                           // must be small but no too small.
solve Laplace(p,q)
= int2d(Th) ( p*q*eps + grad(p)'*grad(q) )
- int2d(Th) ( f*q ) - int1d(Th) (gn*q) ;
```

Remark: it is difficult to put Dirichlet boundary condition on only one point so set the constant due to label definition.



Laplace equation (mixte formulation) I/III

Now we solve $-\Delta p = f$ in Ω , $p = g_d$ on Γ_d , $\partial_n p = g_n$ on Γ_n .

Γ_d, Γ_n is a partition of $\partial\Omega$.

with $\vec{u} = \nabla p$ the problem becomes:

Find \vec{u}, p such that:

$$-\nabla \cdot \vec{u} = f, \quad \vec{u} - \nabla p = 0 \quad \text{in } \Omega, \quad p = g_d \quad \text{on } \Gamma_d, \quad \partial_n p = g_n \quad \text{on } \Gamma_n \quad (4)$$

Mixte variational formulation is: find $\vec{u} \in H_{div}(\Omega)$, $p \in L^2(\Omega)$, $\vec{u} \cdot n = g_n$ on Γ_n such that

$$\int_{\Omega} q \nabla \cdot \vec{u} + \int_{\Omega} p \nabla \cdot \vec{v} + \vec{u} \cdot \vec{v} = \int_{\Omega} -f q + \int_{\Gamma_d} g_d \vec{v} \cdot \vec{n}, \quad \forall (\vec{v}, q) \in H_{div} \times L^2, \text{ and } \vec{v} \cdot n = 0 \text{ on } \Gamma_n$$



Laplace equation (mixte formulation) II/III

```
mesh Th=square(10,10); fespace Vh(Th,RT0), Ph(Th,P0);
func gd = 1.; func gn = 1.; func f = 1.;
Vh [u1,u2], [v1,v2];
Ph p,q;
solve laplaceMixte([u1,u2,p],[v1,v2,q],solver=UMFPACK)
= int2d(Th)( p*q*0e-10 + u1*v1 + u2*v2
              + p*(dx(v1)+dy(v2)) + (dx(u1)+dy(u2))*q )
+ int2d(Th)( f*q)
- int1d(Th,1,2,3)( gd*(v1*N.x+v2*N.y)) // int on  $\Gamma_d$ 
+ on(4,u1=gn*N.x,u2=gn*N.y); // mean  $u \cdot n = (g_n)n$ 
```

Run:LaplaceRT.edp



Laplace equation (Galerkin discontinuous formulation) III/III

```
solve  $-\Delta u = f$  on  $\Omega$  and  $u = g$  on  $\Gamma$ 

macro dn(u) (N.x*dx(u)+N.y*dy(u)) // def the normal derivative
mesh Th = square(10,10); // unite square
fespace Vh(Th,P2dc); // discontinuous P2 finite element
// if pena = 0 => Vh must be P2 otherwise penalization
real pena=0; // to add penalization
func f=1; func g=0;
Vh u,v;

problem A(u,v,solver=UMFPACK) = // 
    int2d(Th) (dx(u)*dx(v)+dy(u)*dy(v))
+ intalledges(Th) ( // loop on all edge of all triangle
    ( jump(v)*mean(dn(u)) - jump(u)*mean(dn(v))
    + pena*jump(u)*jump(v) ) / nTonEdge )
- int2d(Th) (f*v)
- int1d(Th) (g*dn(v) + pena*g*v) ;
A; // solve DG
```

Run:LapDG2.edp



A mathematical Poisson Problem with full Neumann BC. with 1D lagrange multiplier

The variationnal form is find $(u, \lambda) \in V_h \times \mathbb{R}$ such that

$$\forall (v, \mu) \in V_h \times \mathbb{R} \quad a(u, v) + b(u, \mu) + b(v, \lambda) = l(v), \quad \text{where } b(u, \mu) = \mu \int_{\Omega} u$$

```
mesh Th=square(10,10);      fespace Vh(Th,P1);      //      P1 FE space
int n = Vh.ndof, n1 = n+1; func f=1+x-y;
macro Grad(u) [dx(u),dy(u)]                                         // EOM
varf va(uh,vh) = int2d(Th)(Grad(uh)'*Grad(vh));
varf vL(uh,vh) = int2d(Th)(f*vh);
varf vb(uh,vh)= int2d(Th)(1.*vh);
matrix A=va(Vh,Vh);
real[int] b=vL(0,Vh), B = vb(0,Vh);
real[int] bb(n1),x(n1),b1(1),l(1); b1=0;
matrix AA = [ [ A , B ] , [ B' , 0 ] ] ; bb = [ b, b1];
set(AA,solver=UMFPACK);           // set the type of linear solver.
x = AA^-1*bb;       [uh[],l] = x;           // solve the linear systeme
plot(uh,wait=1);                         // set the value
```

Run:Laplace-lagrange-mult.edp



3 Academic Examples

- Laplace/Poisson
- **Mortar Method**
- Linear elasticity equation
- Stokes equation
- Heat equation with thermic resistance
- Optimize Time depend schema



Mortar Method

Let be a partition without overlap $\Omega = \cup_{i=0,\dots,4} \Omega_i$.

Remark Ω is the open set without the skeleton \mathcal{S} and the external boundary is Γ . So the Mortar problem is: Find $u \in H^1(\Omega)$ such that $u|_{\Gamma} = g$ and $\lambda \in H^{-\frac{1}{2}}(\mathcal{S})$ and

$$\forall v \in H^1(\Omega), \quad v|_{\Gamma} = 0, \quad \int_{\Omega} \nabla u \nabla v + \int_{\mathcal{S}} [v] \lambda = \int_{\Omega_i} f v$$

$$\forall \mu \in H^{-\frac{1}{2}}(\mathcal{S}), \quad \int_{\mathcal{S}} [u] \mu = 0$$

For each sub domain Ω_i ,

$$\forall v \in H^1(\Omega_i), \quad v|_{\Gamma} = 0, \quad \int_{\Omega_i} \nabla u \nabla v + \int_{\mathcal{S} \cap \partial \Omega_i} \varepsilon_i \lambda v = \int_{\Omega_i} f v$$

$$\forall \mu \in H^{-\frac{1}{2}}(\mathcal{S}), \quad \sum_i \int_{\mathcal{S} \cap \partial \Omega_i} \varepsilon_i \mu u = 0$$

Where $\varepsilon_i = \mathbf{n}_{\mathcal{S}} \cdot \mathbf{n}_i$, $\varepsilon_i = \pm 1$ and $\sum_i \varepsilon_i = 0$.



$$J'(\lambda)(\mu) = - \int_{\mathcal{S}} [u_\lambda] \mu = 0 \forall \mu$$

$$\forall v \in H^1(\Omega_i), \quad v|_{\Gamma} = 0, \quad \int_{\Omega_i} \nabla u_l \nabla v + \int_{\mathcal{S} \cap \partial \Omega_i} \varepsilon_i \lambda v = \int_{\Omega_i} f v$$

For each sub domain Ω_i ,

$$\forall v \in H^1(\Omega_i), \quad v|_{\Gamma} = 0, \quad \int_{\Omega_i} \nabla u \nabla v + \int_{\mathcal{S} \cap \partial \Omega_i} \varepsilon_i \lambda v = \int_{\Omega_i} f v$$

$$\forall \mu \in H^{-\frac{1}{2}}(\mathcal{S}), \quad \sum_i \int_{\mathcal{S} \cap \partial \Omega_i} \varepsilon_i \mu u = O$$

Where $\varepsilon_i = \mathbf{n}_{\mathcal{S}} \cdot \mathbf{n}_i$, $\varepsilon_i = \pm 1$ and $\sum_i \varepsilon_i = 0$.



Mortar method, compute the Normal

```
//      def of mortar FE..
meshL Thm=buildmeshL(gi(Ng));.
fespace Lh(Thm,P0);                                //      Thm is a meshL ...
fespace PTh(Thm,[P0,P0]);                          //      FE for normal ...
Phm [Nmx,Nmy];          //  Warning only the tangent is defined on meshL
varf vNN([ux,uy],[nx,ny]) =           //  axel: Ns 2D -> Tl 3D curve
    int1d(Thm,1)(( -nx*Tl.y + ny*Tl.x)/lenEdge);
Nmx []= vNN(0,RTh);
//      Array each S.D.. ; Thi == mesh of the current subdomain
mesh[int] Thsd(nbsd);
for(int sd=0;sd<nbsd;++sd)
    Thsd[sd]=trunc(Tha,region==regi[sd],split=1);      //      the Sub.
Dom.
fespace Vhi(Thi,P1);   fespace Ehi(Thi,P0);
matrix[int] Asd(nbsd),Csd(nbsd),PAsd(nbsd),PIsd(nbsd),PJsd(nbsd);
Vhi[int] usd(nbsd),vsd(nbsd),rhssd(nbsd),pusd(nbsd),bcsd(nbsd);
Ehi[int] epssd(nbsd);
```



Mortar method, next

```
//      for all sub domain ...
for(int sd=0;sd<nbsd;++sd)
{
    Thi=Thsd[sd];  usd[sd]=0;  vsd[sd]=0;
    varf vepsi(u,v)= int1d(Thi,1) ( (Nmx*N.x + Nmy*N.y)*v/lenEdge);
    epssd[sd][]= vepsi(0,Ehi);
    epssd[sd] = -real(epssd[sd]<-1e-5) + real(epssd[sd]>1e-5);
    varf cci([l],[u]) = int1d(Thm,1,qforder=3)(l*u*epssd[sd]);
    varf vLapMi([ui],[vi],tgv=tgv) =
        int2d(Thi)( Grad(ui)'*Grad(vi) )
        + int2d(Thi)( f*vi ) + on(labext,ui=g);
    varf vrhsMi(ui,vi) = on(labext,ui=g);
    Csd[sd] = cci(Lh,Vhi); // new Matrix Stuff
    Asd[sd] = vLapMi(Vhi,Vhi,solver=sparse solver);
    rhssd[sd][]=vLapMi(0,Vhi);
}
```

Run:mortar-DN-4.edp



3 Academic Examples

- Laplace/Poisson
- Mortar Method
- Linear elasticity equation
- Stokes equation
- Heat equation with thermic resistance
- Optimize Time depend schema



Linear Lame equation, weak form

Let a domain $\Omega \subset \mathbb{R}^d$ with a partition of $\partial\Omega$ in Γ_d, Γ_n .

Find the displacement \mathbf{u} field such that:

$$-\nabla \cdot \sigma(\mathbf{u}) = \mathbf{f} \text{ in } \Omega, \quad \mathbf{u} = \mathbf{0} \text{ on } \Gamma_d, \quad \sigma(\mathbf{u}) \cdot \mathbf{n} = \mathbf{0} \text{ on } \Gamma_n \quad (5)$$

Where $\varepsilon(\mathbf{u}) = \frac{1}{2}(\nabla \mathbf{u} + {}^t \nabla \mathbf{u})$ and $\sigma(\mathbf{u}) = \mathbf{A}\varepsilon(\mathbf{u})$ with \mathbf{A} the linear positif operator on symmetric $d \times d$ matrix corresponding to the material propriety. Denote

$$V_g = \{\mathbf{v} \in H^1(\Omega)^d / \mathbf{v}|_{\Gamma_d} = \mathbf{g}\}.$$

The Basic displacement variational formulation is: find $\mathbf{u} \in V_0(\Omega)$, such that:

$$\int_{\Omega} \varepsilon(\mathbf{v}) : \mathbf{A}\varepsilon(\mathbf{u}) = \int_{\Omega} \mathbf{v} \cdot \mathbf{f} + \int_{\Gamma} ((\mathbf{A}\varepsilon(\mathbf{u})) \cdot \mathbf{n}) \cdot \mathbf{v}, \quad \forall \mathbf{v} \in V_0(\Omega) \quad (6)$$



Linear elasticity equation, in FreeFem++

The finite element method is just: replace V_g with a finite element space, and the FreeFem++ code:

```
load "medit"    include "cube.idp"
int[int] Nxyz=[20,5,5];
real [int,int] Bxyz=[[0.,5.],[0.,1.],[0.,1.]];
int [int,int] Lxyz=[[1,2],[2,2],[2,2]];
mesh3 Th=Cube(Nxyz,Bxyz,Lxyz);
                                         // Alu ...
real rhoAlu = 2600, alu11= 1.11e11 , alu12 = 0.61e11 ;
real alu44= (alu11-alu12)*0.5;
func Aalu = [  [alu11, alu12,alu12,      0.      ,0.      ,0.      ],
                [alu12, alu11,alu12,      0.      ,0.      ,0.      ],
                [alu12, alu12,alu11,      0.      ,0.      ,0.      ],
                [0. ,      0. ,      0. ,      alu44,0.      ,0.      ],
                [0. ,      0. ,      0. ,      0.      ,alu44,0.      ],
                [0. ,      0. ,      0. ,      0.      ,0.      ,alu44]   ];
real gravity = -9.81;
```



Linear elasticity equation, in FreeFem++



```
fespace Vh(Th, [P1,P1,P1]);
Vh [u1,u2,u3], [v1,v2,v3];
macro Strain(u1,u2,u3)
[ dx(u1), dy(u2), dz(u3), (dz(u2) +dy(u3)), (dz(u1)+dx(u3)), (dy(u1)+dx(u2)) ]
// EOM
solve Lame([u1,u2,u3], [v1,v2,v3])=
 int3d(Th)( Strain(v1,v2,v3)'*(Aalu*Strain(u1,u2,u3)) )
- int3d(Th) ( rhoAlu*gravity*v3)
+ on(1,u1=0,u2=0,u3=0) ;

real coef= 0.1/u1[].linfty;  int[int] ref2=[1,0,2,0];
mesh3 Thm=movemesh3(Th,
    transfo=[x+u1*coef,y+u2*coef,z+u3*coef],
    label=ref2);
plot(Th,Thm, wait=1,cmm="coef amplification = "+coef );
medit("Th-Thm",Th,Thm);
```



Lame equation / figure

coeff amplification= 3997.95

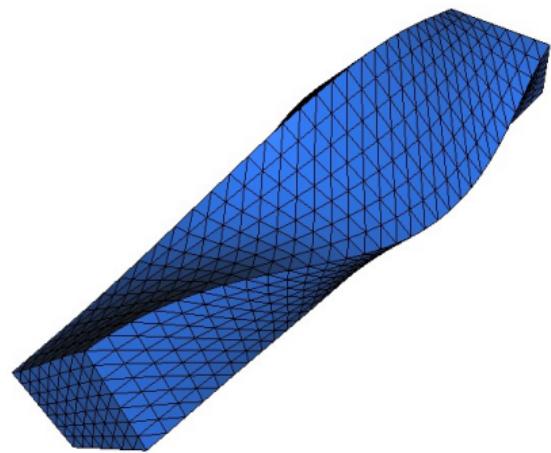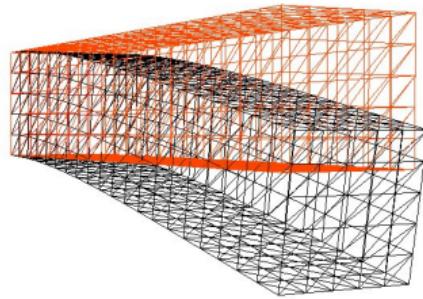

Run:beam-3d.edp

Run:beam-EV-3d.edp

Run:free-cyl-3d.edp

Run:beam-3d-Adapt.edp

3 Academic Examples

- Laplace/Poisson
- Mortar Method
- Linear elasticity equation
- **Stokes equation**
- Heat equation with thermic resistance
- Optimize Time depend schema



Stokes equation

The Stokes equation is find a velocity field $\mathbf{u} = (u_1, \dots, u_d)$ and the pressure p on domain Ω of \mathbb{R}^d , such that

$$\begin{aligned}-\Delta \mathbf{u} + \nabla p &= 0 && \text{in } \Omega \\ \nabla \cdot \mathbf{u} &= 0 && \text{in } \Omega \\ \mathbf{u} &= \mathbf{u}_\Gamma && \text{on } \Gamma\end{aligned}$$

where \mathbf{u}_Γ is a given velocity on boundary Γ .

The classical variational formulation is: Find $\mathbf{u} \in H^1(\Omega)^d$ with $\mathbf{u}|_\Gamma = \mathbf{u}_\Gamma$, and $p \in L^2(\Omega)/\mathbb{R}$ such that

$$\forall \mathbf{v} \in H_0^1(\Omega)^d, \quad \forall q \in L^2(\Omega)/\mathbb{R}, \quad \int_{\Omega} \nabla \mathbf{u} : \nabla \mathbf{v} - p \nabla \cdot \mathbf{v} - q \nabla \cdot \mathbf{u} = 0$$

or now find $p \in L^2(\Omega)$ such than (with $\varepsilon = 10^{-10}$)

$$\forall \mathbf{v} \in H_0^1(\Omega)^d, \quad \forall q \in L^2(\Omega), \quad \int_{\Omega} \nabla \mathbf{u} : \nabla \mathbf{v} - p \nabla \cdot \mathbf{v} - q \nabla \cdot \mathbf{u} - \varepsilon pq = 0$$



Stokes equation in FreeFem++

```

... build mesh .... Th (3d) T2d ( 2d)
fespace VVh(Th,[P2,P2,P2,P1]);           // Taylor Hood FE.
macro Grad(u) [dx(u),dy(u),dz(u)]        // EOM
macro div(u1,u2,u3) (dx(u1)+dy(u2)+dz(u3)) // EOM
VVh [u1,u2,u3,p],[v1,v2,v3,q] ;
solve vStokes([u1,u2,u3,p],[v1,v2,v3,q]) =
int3d(Th)(
    Grad(u1)'*Grad(v1)
    + Grad(u2)'*Grad(v2)
    + Grad(u3)'*Grad(v3)
    - div(u1,u2,u3)*q - div(v1,v2,v3)*p
    - 1e-10*q*p )
+ on(1,u1=0,u2=0,u3=0) + on(2,u1=1,u2=0,u3=0);

```

Run:Stokes-2d.edp Run:Stokes-bug.edp Run:Stokes-UzawaCahouetChabart-bug.edp
Run:Stokes-Pipe.edp Run:Stokes3d.edp

3 Academic Examples

- Laplace/Poisson
- Mortar Method
- Linear elasticity equation
- Stokes equation
- Heat equation with thermic resistance
- Optimize Time depend schema



Heat equation with thermic resistance

let Ω be a domain cut with internal boundary Γ_0 in 2 sub-domain $\Omega_i, (i = 1, 2)$

We have Heat equation (Poisson) on Ω , but on Γ_0 we have a jump $[u]$ on the temperature u proportional to the temperature flux which is continuous.

So the equation to solve is:

Find u such that $u|_{\Omega_i} \in H(\Omega_i)$ for $i = 1, 2$ and

$$-\nabla \kappa \nabla u = f_i, \quad \text{in } \Omega_i$$

$$c(u_2 - u_1) = \kappa \nabla u_1 \cdot n_1, \quad \kappa \nabla u_1 \cdot n_1 = -\kappa \nabla u_2 \cdot n_2, \quad \text{on } \Gamma_0 \text{ or}$$

$$c(u_2 - u_1) = \kappa \nabla u_1 \cdot n_1, \quad c(u_1 - u_2) = \kappa \nabla u_2 \cdot n_2 \quad \text{on } \Gamma_0$$

+ external boundary condition on $\partial\Omega$

For the test you can use:

$L = 3$, $\Omega =]-L, L[\times]0, 1[$, $\Gamma_0 = \{\sin(\pi y)/5, y \in [0, 1]\}$, take $\kappa = i$ in Ω_i .

The external boundary condition on $\partial\Omega$ are: $\kappa \nabla u \cdot n = 0$ on upper and lower boundary, $u = 0$ at the left part, $u = 1$ at the right part.



Heat equation with thermic resistance/ II

Method 1: Solve 2 coupled problems and use the block matrix tools to defined the linear system of the problem.

So the variational form is in find $u|_{\Omega_i} \in H^1(\Omega_i), i = 1, 2$

$$\sum_i \int_{\Omega_i} \kappa \nabla u \cdot \nabla v = \sum_i \int_{\Omega_i} f_i v + \int_{\Gamma_0} c(u_2 - u_1)(v_1 - v_2) + \text{BC}, \forall v_i \in H^1(\Omega_i) + \text{BC}$$

Run:Contact-thermic-2022.edp

Method 2: New Method with new problem definition see J. Morice talk.

```
fespace cVh (<Vh1, Vh2>);  
varf compositeVall ([u1, u2], [v1, v2]) =  
    int2d(Th1) (k1*dx(u1)*dx(v1) + k1*dy(u1)*dy(v1))  
+ on(3, u1=T0)  
+ int1d(Th1, 10, mortar=1) (-c*(u2-u1)*(v1-v2))  
+ int2d(Th2) (k2*dx(u2)*dx(v2) + k2*dy(u2)*dy(v2))  
+ on(4, u2=T1);
```



3 Academic Examples

- Laplace/Poisson
- Mortar Method
- Linear elasticity equation
- Stokes equation
- Heat equation with thermic resistance
- Optimize Time depend schema



Fast method for Time depend Problem / formulation

First, it is possible to define variational forms, and use this forms to build matrix and vector to make very fast script (4 times faster here).

For example solve the Thermal Conduction problem of section 3.4. We must solve the temperature equation in Ω in a time interval $(0,T)$.

$$\begin{aligned} \partial_t u - \nabla \cdot (\kappa \nabla u) &= 0 \text{ in } \Omega \times (0, T), \\ u(x, y, 0) &= u_0 + xu_1 \\ u &= 30 \text{ on } \Gamma_{24} \times (0, T), \quad \kappa \frac{\partial u}{\partial n} + \alpha(u - u_e) = 0 \text{ on } \Gamma \times (0, T). \end{aligned} \quad (7)$$

The variational formulation is in $L^2(0, T; H^1(\Omega))$; we shall seek u^n satisfying

$$\forall w \in V_0; \quad \int_{\Omega} \frac{u^n - u^{n-1}}{\delta t} w + \kappa \nabla u^n \nabla w + \int_{\Gamma} \alpha(u^n - u_{ue}) w = 0$$

where $V_0 = \{w \in H^1(\Omega) / w|_{\Gamma_{24}} = 0\}$.



Fast method for Time depend Problem algorithm

So the to code the method with the matrices $A = (A_{ij})$, $M = (M_{ij})$, and the vectors $u^n, b^n, b', b'', b_{cl}$ (notation if w is a vector then w_i is a component of the vector).

$$u^n = A^{-1}b^n, \quad b' = b_0 + Mu^{n-1}, \quad b'' = \frac{1}{\varepsilon} b_{cl}, \quad b_i^n = \begin{cases} b''_i & \text{if } i \in \Gamma_{24} \\ b'_i & \text{else} \end{cases}$$

Where with $\frac{1}{\varepsilon} = \text{tgv} = 10^{30}$:

$$A_{ij} = \begin{cases} \frac{1}{\varepsilon} & \text{if } i \in \Gamma_{24}, \text{ and } j = i \\ \int_{\Omega} w_j w_i / dt + k(\nabla w_j \cdot \nabla w_i) + \int_{\Gamma_{13}} \alpha w_j w_i & \text{else} \end{cases}$$

$$M_{ij} = \begin{cases} \frac{1}{\varepsilon} & \text{if } i \in \Gamma_{24}, \text{ and } j = i \\ \int_{\Omega} w_j w_i / dt & \text{else} \end{cases}$$

$$b_{0,i} = \int_{\Gamma_{13}} \alpha u_{ue} w_i$$

$$b_{cl} = u^0 \quad \text{the initial data}$$



...

```
Vh u0=fu0,u=u0;
```

Create three variational formulation, and build the matrices A, M .

```
varf vthermic (u,v)= int2d(Th) (u*v/dt  
+ k*(dx(u) * dx(v) + dy(u) * dy(v)))  
+ int1d(Th,1,3) (alpha*u*v) + on(2,4,u=1);
```

```
varf vthermic0(u,v) = int1d(Th,1,3) (alpha*ue*v);
```

```
varf vMass (u,v)= int2d(Th) ( u*v/dt) + on(2,4,u=1);
```

```
real tgv = 1e30;
```

```
matrix A= vthermic(Vh,Vh,tgv=tgv,solver=CG);
```

```
matrix M= vMass (Vh,Vh);
```



Fast The Time depend Problem/ edp

Now, to build the right hand size we need 4 vectors.

```
real[int] b0 = vthermic0(0,Vh);      // constant part of RHS
real[int] bcn = vthermic(0,Vh);      // tgv on Dirichlet part
// we have for the node i : i ∈ Γ24 ⇔ bcn[i] ≠ 0
real[int] bcl=tgv*u0[];             // the Dirichlet B.C. part
```

The Fast algorithm:

```
for(real t=0;t<T;t+=dt) {
    real[int] b = b0 ;                                // for the RHS
    b += M*u[];                                     // add the time dependent part
    b = bcn ? bcl : b;                             // do ∀i: b[i]=bcn[i]?bcl[i]:b[i];
    u[] = A^-1*b;                                  // Solve linear problem
    plot(u);
}
```

Run:Heat.edp



Outline

1 Introduction

2 Tools

3 Academic Examples

4 Bose Einstein Condensate, result analyse

5 Numerics Tools

6 MPI/Parallel

7 Exercises

8 No Linear Problem



With. I. Danaila (Univ. Rouen), G. Vergez (Phd Becasim), P-E Emeriau (Stage ENS)

Just a direct use of Ipopt interface (2 day of works to start script see, + n month)
The problem is find a complex field u on domain \mathcal{D} such that:

$$u = \operatorname{argmin}_{\|u\|=1} \int_{\mathcal{D}} \frac{1}{2} |\nabla u|^2 + V_{trap} |u|^2 + \frac{g}{2} |u|^4 - \Omega i \bar{u} \left(\begin{pmatrix} -y \\ x \end{pmatrix} \cdot \nabla \right) u$$

to code that in FreeFem++

use

- Ipopt interface (<https://projects.coin-or.org/Ipopt>)
- Adaptation de maillage

The idea to mixte Ipopt and adapt mesh is play this stop criterion, and finally use freefem++ to analyse the result.

Run:BEC.edp



④ Bose Einstein Condensate, result analyse

- Search all local min
- Best Fit
- Delaunay mesh
- Analyse of a Condensate



Search all local min

The function `findallocalmin` find all the local min and use a greedy algorithm to to the local attraction zone, by adding the triangle through the minimal vertices.

```
mesh Th=square(50,50, [x*2-1,y*2-1]);
load "isoline"
fespace Vh(Th,P1), Ph(Th,P0);
int k =2;
Vh u= sin(k*pi*x)*sin(k*pi*y);
plot(u, wait=1);
Ph r;
int[int] lm=findallocalmin(Th,u[],r[]);
// lm array gives the vertex number of all the local min
// r is function P0 defined the attraction zone of the local min
// (local min number)
plot(r,u,fill=1,wait=1);
// to see where is the minimuns
Ph mx= Th(lm[real(r)]).x -x, my= Th(lm[real(r)]).y -y;
plot([mx,my],u,wait=1,fill=0);
```

Run:`findallocalmin.edp`

Run:`findallocalminbec.edp`



④ Bose Einstein Condensate, result analyse

- Search all local min
- Best Fit
- Delaunay mesh
- Analyse of a Condensate



(With. P-E Emeriau) Just use ipopt to find the arg min of $J(\alpha) = \int_{\Omega} (u - \phi_{\alpha})^2$ where α is the set of parameters.

```
real[int] data0 = [ ux , x0, y0 , s0] ; // start point

func real J(real[int] & dat) {
    alpha=dat;
    return int2d(Th) (square(u-phialpha)) ;
}

func real[int] dJ(real[int] & dat) {
    alpha=dat;
    dat[0]=int2d(Th) (-2*(u-phialpha)*d0phialpha) ;
    dat[1]=int2d(Th) (-2*(u-phialpha)*d1phialpha) ;
    dat[2]=int2d(Th) (-2*(u-phialpha)*d2phialpha) ;
    dat[3]=int2d(Th) (-2*(u-phialpha)*d3phialpha) ;
    return dat; }
real[int] data=data0;
verbosity=0;
int r = IPOPT(J,dJ,data,printlevel=0);
```

Run:fit-ipopt.edp



Best Fit axisymmetric

On the domain with no vortex, all just do the L2 projection on axisymmetric space with a laplace regularisation

```
Ph pok=data7(6, real(r)); // domain with no hole
func r = sqrt(x*x+y*y);
Vh pr = r;
real R = pr[].max;
mesh Th1d=square(200,1,[x*R,y]);
fespace V1d(Th1d,P1,periodic=[[1,x],[3,x]]) ;// dat axi
mesh The = trunc(Thg,pok==1); // mesh
Vh u2=u*u;
varf vM1d(u,v) = int1d(Th1d,1) (dx(u)*dx(v))
+ int2d(The, mapu=[r,0] , mapt=[r,0] ) (u*v);
matrix M=vM1d(V1d,V1d, solver=CG);
varf vb1d(u,v) = int2d(The, mapt=[r,0]) (u2*v);
real[int] b1d=vb1d(0,V1d); V1d u1dt;
u1dt[] = M^-1*b1d;
Vh u20 = u1dt(r,0); // Axi -> 2d
plot(u20,u2,wait=1,dim=3);
```

Run:fit-axi.edp



④ Bose Einstein Condensate, result analyse

- Search all local min
- Best Fit
- Delaunay mesh
- Analyse of a Condensate



Delaunay mesh

```
mesh Thc=triangulate(data7(0,:),data7(1,:));  
  
fespace Eh(Thc,P0edge); // Element P0 / Edge  
varf vedge(u,v) = intalleges(Thc,qforder=1)((nTonEdge==2)*v/  
nTonEdge);  
real[int] eih=vedge(0,Eh);  
int ei=0;  
for(int e=0; e < eih.n; ++e) if(eih[e]) eih[ei++]=eih[e];  
eih.resize(ei);  
real moy = eih.sum/ eih.n ;  
// Statistic  
real[int] dd = eih;dd-= moy;  
real variance = dd.l2 / dd.n;  
cout << "moy_eih=" << moy << "standart_deviatiion" << sqrt(  
variance) << endl;  
for(int i=1 ; i<10; ++i)  
cout << "quantile" << i/10. << "=" << eih.quantile(i/10.) << endl;
```

Run:analyssolbec.edp





④ Bose Einstein Condensate, result analyse

- Search all local min
- Best Fit
- Delaunay mesh
- Analyse of a Condensate



Analyse of a Condensate

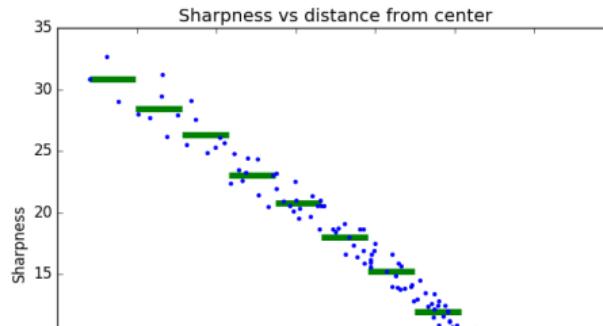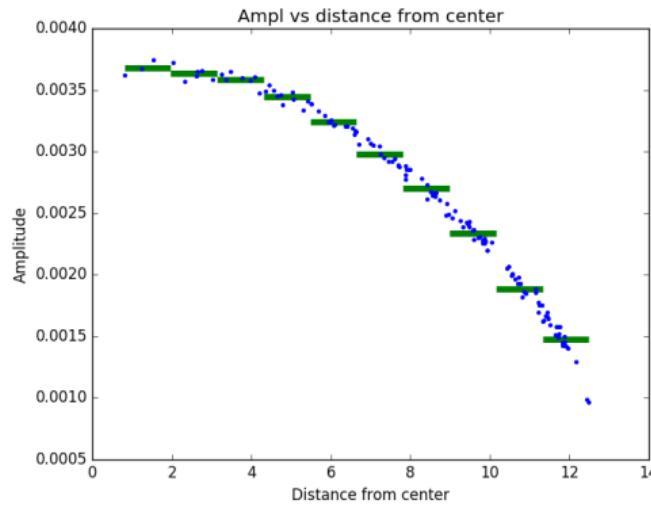

1 Introduction

2 Tools

3 Academic Examples

4 Bose Einstein Condensate, result analyse

5 Numerics Tools

6 MPI/Parallel

7 Exercises

8 No Linear Problem



5 Numerics Tools

- Connectivity
- Input/Output
- Tricks
- Eigenvalue
- Optimization Tools



```
mesh Th=square(5,5);
fespace Wh(Th,P2);
cout << " nb of DoF      : " << Wh.ndof << endl;
cout << " nb of DoF / K : " << Wh.ndofK << endl;
int k= 2, kdf= Wh.ndofK ;;                                // element 2
cout << " df of element " << k << ":" ;
for (int i=0;i<kdf;i++) cout << Wh(k,i) << " ";
cout << endl;
```

Remark on local numbering of Dof by element is

for each sub finite element Pk in [P2,P2,P1] get fist DoF on vertex, second Dof on edge (opposite to vertex), second on K.

Run:Mesh-info.edp



5 Numerics Tools

- Connectivity
- Input/Output
- Tricks
- Eigenvalue
- Optimization Tools



```
uses cout, cin, endl, <<, >>.  
To write to (resp. read from) a file,  
declare a new variable ofstream ofile("filename");  
or  
ofstream ofile("filename", append); (resp. ifstream  
ifile("filename"); )  
or  
ofstream ofile("filename", append|binary); (resp. ifstream  
ifile("filename", binary); )  
and use ofile (resp. ifile) as cout (resp. cin).
```

You can use pipe to transfer data to a other code here (gnuplot), see pipe.edp example:

You can use the plugin bfstream tp make binary io (see [Run:bfstream.edp](#))

[Run:pipe.edp](#)

[Run:io.edp](#)



5 Numerics Tools

- Connectivity
- Input/Output
- Tricks
- Eigenvalue
- Optimization Tools



What is simple to do with freefem++ :

- Evaluate variational form with Boundary condition or not.
- Do interpolation
- Do linear algebra
- Solve sparse problem.



? Question, Find the list Degree of Freedom (DoF) of border k for coupling problem.

Idea Take a function increasing negative function $\xi - C_{te}$ on the border, and do a simultaneous sort the to array and DoF numbering, remark we use a PDE on border to build this kind of function

$$\nabla \xi \cdot N^\perp = 1 \text{ on } \Gamma_b$$

or use the macro

`ExtractDofsonBorder(labs, Wh, dof labs, orient)` defined in
`"ExtractDofsonBorder.idp"`,

Run:`ListOfDofOnBorder.edp` and see:`ExtractDofsonBorder.idp`.

Computation of error estimate $\eta_K = \sqrt{\int_K \text{blabla}} = \sqrt{\int_\Omega w_k \text{blabla}}$ where w_k is the basic function of fespace $\text{Ph}(\text{Th}, \text{P}0)$.

```
varf vetaK(unused, wK) = int2d(Th)( blabla * wK);
Ph etaK; etaK[] = vetaK(0, Ph); etaK=sqrt(etaK);
```



to Change Default sparse solver add following line:

```
load += "MUMPS_seq"
```

if MUMPS-seq is available in file `\$(HOME)/.freefem++.pref`

Diff How to compute, differential: use of macro

$$J(u) = \int_{\Omega} F(u); \quad \text{macro } F(u) = \sqrt{1 + \nabla u \cdot \nabla u}$$

$$dJ(u)(v) = \int_{\Omega} dF(u, v); \quad \text{macro } dF(u, v) = \frac{\nabla u \cdot \nabla v}{\sqrt{1 + \nabla u \cdot \nabla u}}$$

$$ddJ(u)(v, w) = \int_{\Omega} ddF(u, v, w);$$

$$\text{macro } ddF(u, v, w) = \frac{\nabla w \cdot \nabla v}{\sqrt{1 + \nabla u \cdot \nabla u}} - \frac{(\nabla u \cdot \nabla v)(\nabla w \cdot \nabla v)}{\sqrt{1 + \nabla u \cdot \nabla u}^3}$$



5 Numerics Tools

- Connectivity
- Input/Output
- Tricks
- Eigenvalue
- Optimization Tools



Eigenvalue/ Eigenvector example

The problem, Find the first λ, u_λ such that:

$$a(u_\lambda, v) = \int_{\Omega} \nabla u_\lambda \nabla v = \lambda \int_{\Omega} u_\lambda v = \lambda b(u_\lambda, v)$$

the boundary condition is made with exact penalization: we put $1e30 = tgv$ on the diagonal term of the lock degree of freedom. So take Dirichlet boundary condition only with a variational form and not on b variational form , because we compute eigenvalue of

$$\frac{1}{\lambda}v = A^{-1}Bv$$

Otherwise we get spurious mode.

Arpack interface:

```
int k=EigenValue (A,B, sym=true, value=ev, vector=eV);
```



Eigenvalue/ Eigenvector example code

```
...
fespace Vh(Th,P1);
macro Grad(u) [dx(u),dy(u),dz(u)] // EOM
varf a(u1,u2)= int3d(Th)( Grad(u1)'*Grad(u2) + on(1,u1=0) ;
varf b([u1],[u2]) = int3d(Th)( u1*u2 ) ; // no BC
matrix A= a(Vh,Vh,solver=UMFPACK),
B= b(Vh,Vh,solver=CG,eps=1e-20);

int nev=40; // number of computed eigenvalue close to 0
real[int] ev(nev); // to store nev eigenvalue
Vh[int] eV(nev); // to store nev eigenvector
int k=EigenValue(A,B,sym=true,value=ev,vector=eV);
k=min(k,nev);
for (int i=0;i<k;i++)
    plot(eV[i],cmm="ev "+i+" v =" + ev[i],wait=1,value=1);
```

Run:Lap3dEigenValue.edp

Run:LapEigenValue.edp



5 Numerics Tools

- Connectivity
- Input/Output
- Tricks
- Eigenvalue
- Optimization Tools



The IPOPT optimizer in a FreeFem++ script is done with the IPOPT function included in the ff-Ipopt dynamic library. IPOPT is designed to solve constrained minimization problem in the form :

$$\begin{aligned} \text{find } & x_0 = \underset{x \in \mathbb{R}^n}{\operatorname{argmin}} f(x) \\ \text{s.t. } & \left\{ \begin{array}{ll} \forall i \leq n, & x_i^{\text{lb}} \leq x_i \leq x_i^{\text{ub}} \\ \forall i \leq m, & c_i^{\text{lb}} \leq c_i(x) \leq c_i^{\text{ub}} \end{array} \right. \quad \begin{array}{l} (\text{simple bounds}) \\ (\text{constraints functions}) \end{array} \end{aligned}$$

Where ub and lb stand for "upper bound" and "lower bound". If for some $i, 1 \leq i \leq m$ we have $c_i^{\text{lb}} = c_i^{\text{ub}}$, it means that c_i is an equality constraint, and an inequality one if $c_i^{\text{lb}} < c_i^{\text{ub}}$.



```

func real J(real[int] &X) {...}                                // Fitness Function,
func real[int] gradJ(real[int] &X) {...}                         // Gradient

func real[int] C(real[int] &X) {...}                                // Constraints
func matrix jacC(real[int] &X) {...}                            // Constraints jacobian

matrix jacCBuffer;                                              // just declare, no need to define yet
func matrix jacC(real[int] &X)
{
    ...
    return jacCBuffer;                                         // fill jacCBuffer
}

```

The hessian returning function is somewhat different because it has to be the hessian of the lagrangian function
 $: (x, \sigma_f, \lambda) \mapsto \sigma_f \nabla^2 f(x) + \sum_{i=1}^m \lambda_i \nabla^2 c_i(x)$ where $\lambda \in \mathbb{R}^m$ and $\sigma \in \mathbb{R}$. Your hessian function should then have

the following prototype :

```

matrix hessianLBuffer;                                         // just to keep it in mind
func matrix hessianL(real[int] &X, real sigma, real[int] &lambda) {...}

```



Ipopt Call

```
real[int] Xi = ... ;                                // starting point
IPOPT(J,gradJ,hessianL,C,jacC,Xi, ... );
IPOPT(J,gradJ,C,jacC,Xi,...);                     // IPOPT with BFGS
IPOPT(J,gradJ,hessianJ,Xi,...);                   // Newton IPOPT
                                                   // without constraints
IPOPT(J,gradJ,Xi, ... );                          // BFGS, no constraints
IPOPT(J,gradJ,Xi, ... );                          // BFGS, no constraints
IPOPT([b,A],CC,uil[],lb=lb1[],clb=cl[]...);    // affine case
...
...
```



Ipopt interface

```
load "ff-Ipopt"
varf vP([u1,u2],[v1,v2]) = int2d(Th)(Grad(u1)'*Grad(v1)+ Grad(u2)'*Grad(v2))
- int2d(Th)(f1*v1+f2*v2);

matrix A = vP(Vh,Vh);                                // Fitness function matrix...
real[int] b = vP(0,Vh);                            // and linear form
int[int] II1=[0],II2=[1];                          // Constraints matrix
matrix C1 = interpolate (Wh,Vh, U2Vc=II1);
matrix C2 = interpolate (Wh,Vh, U2Vc=II2);
matrix CC = -1*C1 + C2;                           // u2 - u1 >0
Wh cl=0;                                         // constraints lower bounds (no upper bounds)
varf vGamma([u1,u2],[v1,v2]) = on(1,2,3,4,u1=1,u2=1);
real[int] onGamma=vGamma(0,Vh);
Vh [ub1,ub2]=[g1,g2];
Vh [lb1,lb2]=[g1,g2];
ub1[] = onGamma ? ub1[] : 1e19 ;                  // Unbounded in interior
lb1[] = onGamma ? lb1[] : -1e19 ;
Vh [uzi,uzi2]=[uz,uz2],[lzi,lzi2]=[lz,lz2],[ui1,ui2]=[u1,u2];
Wh lmi=lm;
IPOPT([b,A],CC,ui1[],lb=lb1[],clb=cl[],ub=ub1[],warmstart=iter>1,uz=uzi[],lz=lzi[],lm=lmi)

Run:IpoptLap.edp          Run:IpoptVI2.edp          Run:IpoptMinSurfVol.edp
```



```
load "ff-NLopt"
...
if(kas==1)
    mini = nloptAUGLAG(J,start,grad=dJ,lb=lo,ub=up,IConst=IneqC,
                         gradIConst=dIneqC,subOpt="LBFGS",stopMaxFEval=10000,
                         stopAbsFTol=starttol);
else if(kas==2)
    mini = nloptMMA(J,start,grad=dJ,lb=lo,ub=up,stopMaxFEval=10000,
                      stopAbsFTol=starttol);
else if(kas==3)
    mini = nloptAUGLAG(J,start,grad=dJ,IConst=IneqC,gradIConst=dIneqC,
                         EConst=BC,gradEConst=dBC,
                         subOpt="LBFGS",stopMaxFEval=200,stopRelXTol=1e-2);
else if(kas==4)
    mini = nloptSLSQP(J,start,grad=dJ,IConst=IneqC,gradIConst=dIneqC,
                        EConst=BC,gradEConst=dBC,
                        stopMaxFEval=10000,stopAbsFTol=starttol);
```

Run:VarIneq2.edp



This algorithm works with a normal multivariate distribution in the parameters space and try to adapt its covariance matrix using the information provides by the successive function evaluations. Syntaxe: `cmaes(J,u[],...)()`

From <http://www.lri.fr/~hansen/javadoc/fr/inria/optimization/cmaes/package-summary.html>



Stochastic Exemple

```
load "ff-cmaes"

real mini = cmaes(J,start,stopMaxFunEval=10000*(al+1),
                   stopTolX=1.e-4/(10*(al+1)),
                   initialStdDev=(0.025/(pow(100.,al))));

SSPToFEF(best1[],best2[],start);
```

Run:cmaes-VarIneq.edp

```
load "mpi-cmaes"

real mini = cmaesMPI(J,start,stopMaxFunEval=10000*(al+1),
                      stopTolX=1.e-4/(10*(al+1)),
                      initialStdDev=(0.025/(pow(100.,al))));

SSPToFEF(best1[],best2[],start);
```

remark, the FreeFem `mpicommworld` is used by default. The user can specify his own MPI communicator with the named parameter "`comm=`", see the MPI section of this manual for more informations about communicators in FreeFem++.



1 Introduction

2 Tools

3 Academic Examples

4 Bose Einstein Condensate, result analyse

5 Numerics Tools

6 MPI/Parallel

7 Exercises

8 No Linear Problem



Full MPI interface I/III

```
int[int] proc1=[1,2,3],proc2=[0,4];
mpiGroup grp(procs);           //      set MPI_Group to proc 1,2,3 in MPI_COMM_WORLD
mpiGroup grp1(comm,proc1);     //      set MPI_Group to proc 1,2,3 in comm
mpiGroup grp2(grp,proc2);     //      set MPI_Group to grp union proc1

mpiComm comm=mpiCommWorld;        //      set a MPI_Comm to MPI_COMM_WORLD
mpiComm ncomm(mpiCommWorld,grp); //      set the MPI_Comm form grp
                                  //      MPI_COMM_WORLD

mpiComm ncomm(comm,color,key);   //      MPI_Comm_split(MPI_Comm comm,
                                  //      int color, int key, MPI_Comm *ncomm)
mpiComm nicomm(processor(local_comm,local_leader),
                processor(peer_comm,peer_leader),tag);
//      build MPI_INTERCOMM_CREATE(local_comm, local_leader, peer_comm,
//                                  //      remote_leader, tag, &ncomm)

mpiComm ncomm(intercomm,hight) ; //      build using
                                  //      MPI_Intercomm_merge( intercomm, high, &ncomm)
mpiRequest rq;                  //      defined an MPI_Request
mpiRequest[int] arq(10);        //      defined an array of 10 MPI_Request

mpiSize(comm) ;                 //      return the size of comm (int)
mpiRank(comm) ;                 //      return the rank in comm (int)
```



Full MPI interface II/III

```
processor(i)           //      return processor i with no Request in MPI_COMM_WORLD
processor(MPIAnySource)                                //      return processor any source
                                                        //      with no Request in MPI_COMM_WORLD
processor(i,comm)          //      return processor i with no Request in comm
processor(comm,i)          //      return processor i with no Request in comm
processor(i,rq,comm)        //      return processor i with Request rq in comm
processor(i,rq)            //      return processor i with Request rq in
                           //      MPI_COMM_WORLD
processorblock(i)          //      return processor i in MPI_COMM_WORLD
                           //      in block mode for synchronously communication
processorblock(MPIAnySource)                            //      return processor any source
                           //      in MPI_COMM_WORLD in block mode for synchronously communication
processorblock(i,comm)        //      return processor i in in comm in block mode

int status;                                         //      to get the MPI status of send / recv
processor(10) << a << b;                         //      send a,b asynchronously to the process 1,
processor(10) >> a >> b;                         //      receive a,b synchronously from the process 10,
broadcast(processor(10,comm),a);                     //      broadcast from processor
                                                       //      of com to other comm processor
status=Send( processor(10,comm) , a);               //      send synchronously
                                                       //      to the process 10 the data a
status=Recv( processor(10,comm) , a);               //      receive synchronously
                                                       //      from the process 10 the data a;
```



Full MPI interface II/III

```
status=Isend( processor(10,comm) , a);           // send asynchronously to
                                                // the process 10 , the data a without request
status=Isend( processor(10,rq,comm) , a);         // send asynchronously to to
                                                // the process 10, the data a with request
status=Irecv( processor(10,rq) , a);              // receive synchronously from
broadcast(processor(comm,a));                    // Broadcast to all process of comm

mpiBarrier(comm);                                // do a MPI_BARRIER on communicator comm,
                                                // wait on of Request,
mpiWait(rq);                                     // wait add of Request array,
mpiWaitAll(arq);                                 // return MPIWtime in second (real),
mpiWtime();                                       // return MPIWTick in second (real),
mpiWtick();
mpiAlltoall(a,b[,comm]);
mpiAllgather(a,b[,comm]);
mpiGather(a,b,processor(..));
mpiScatter(a,b,processor(..));
mpiReduce(a,b,processor(..),mpiMAX);
mpiAllReduce(a,b,comm, mpiMAX);
mpiReduceScatter(a,b,comm, mpiMAX);
....
```



A first way to break complexity

- ① Build matrix in parallel by assembling per region remark with the `change` function you change the region numbering to build region.

```
real c = mpisize/real(Th.nt) ;
Th=change(Th,fregion= min(mpisize-1,int(nuTriangle*c))) ;
```

- ② Assemble the full matrix in //

```
varf vlaplace(uh,vh) = // definition de problem
    int3d(Th,mpirank)( uh*vh+ dt*Grad(uh)'*grad(vh) )
    + int3d(Th,mpirank)( dt*vh*f ) + on(1,uh=g) ;
matrix A,Ai = vlaplace(Vh,Vh,tgv=ttgv) ;
mpiReduce(Ai,A,processor(0),mpiSUM); // assemble in //
```

- ③ Solve the linear using a good parallel solver (MUMPS)

```
load "MUMPS"
uh[] = A^-1*b; // resolution
```

Run:Heat3d.edp

Run:NSCarCyl-100-mpi2.edp



6 MPI/Parallel

- Schwarz method with overlap
- Poisson equation with Schwarz method
- Transfer Part
- simple parallel GMRES
- A simple Coarse grid solver
- Numerical experiment
- HPDDM



6 MPI/Parallel

- Schwarz method with overlap
- Poisson equation with Schwarz method
- Transfer Part
- simple parallel GMRES
- A simple Coarse grid solver
- Numerical experiment
- HPDDM



To solve the following Poisson problem on domain Ω with boundary Γ in $L^2(\Omega)$:

$$-\Delta u = f, \text{ in } \Omega, \text{ and } u = g \text{ on } \Gamma,$$

where $f \in L^2(\Omega)$ and $g \in H^{\frac{1}{2}}(\Gamma)$ are two given functions.

Let introduce $(\pi_i)_{i=1,\dots,N_p}$ a positive regular partition of the unity of Ω , q-e-d:

$$\pi_i \in \mathcal{C}^0(\Omega) : \quad \pi_i \geq 0 \text{ and } \sum_{i=1}^{N_p} \pi_i = 1.$$

Denote Ω_i the sub domain which is the support of π_i function and also denote Γ_i the boundary of Ω_i .

The parallel Schwarz method is Let $\ell = 0$ the iterator and a initial guest u^0 respecting the boundary condition (i.e. $u^0|_{\Gamma} = g$).

$$\forall i = 1.., N_p : \quad -\Delta u_i^\ell = f, \text{ in } \Omega_i, \quad \text{and } u_i^\ell = u^\ell \text{ on } \Gamma_i \quad (8)$$

$$u^{\ell+1} = \sum_{i=1}^{N_p} \pi_i u_i^\ell \quad (9)$$

Some Remark

We never use finite element space associated to the full domain Ω because it is expensive. So we use on each domain i we defined $J_i = \{j \in 1, \dots, N_p / \Omega_i \cap \Omega_j \neq \emptyset\}$ and we have

$$(u^{\ell+1})_{|\Omega_i} = \sum_{j \in J_i} (\pi_j u_j^\ell)_{|\Omega_i} \quad (10)$$

We denote $u_h^\ell|_i$ the restriction of u_h^ℓ on V_{hi} , so the discrete problem on Ω_i of problem (8) is find $u_{hi}^\ell \in V_{hi}$ such that:

$$\forall v_{hi} \in V_{0i} : \int_{\Omega_i} \nabla v_{hi} \cdot \nabla u_{hi}^\ell = \int_{\Omega_i} f v_{hi},$$

$$\forall k \in \mathcal{N}_{hi}^{\Gamma_i} : \sigma_i^k(u_{hi}^\ell) = \sigma_i^k(u_{h|i}^\ell)$$

where $\mathcal{N}_{hi}^{\Gamma_i}$ is the set of the degree of freedom (Dof) on $\partial\Omega_i$ and σ_i^k the Dof of V_{hi} .



6 MPI/Parallel

- Schwarz method with overlap
- Poisson equation with Schwarz method
- Transfer Part
 - simple parallel GMRES
 - A simple Coarse grid solver
 - Numerical experiment
 - HPDDM



Transfer Part equation(5)

To compute $v_i = (\pi_i u_i)|_{\Omega_i} + \sum_{j \in J_i} (\pi_j u_j)|_{\Omega_i}$ and can be write the freefem++ function
Update with asynchronous send/recv (**Otherwise dead lock**).

```
func bool Update(real[int] &ui, real[int] &vi)
{ int n= jpart.n;
  for(int j=0;j<njpart;++j)  Usend[j][]=sMj[j]*ui;
  mpiRequest[int] rq(n*2);
  for (int j=0;j<n;++)
    Irecv(processor(jpart[j],comm,rq[j]), Ri[j][]);
  for (int j=0;j<n;++)
    Isend(processor(jpart[j],comm,rq[j+n]), Si[j][]);
  for (int j=0;j<n*2;++)
    int k= mpiWaitAny(rq);
  vi = Pii*ui;                                // set to  $(\pi_i u_i)|_{\Omega_i}$ 
                                              // apply the unity local partition .
  for(int j=0;j<njpart;++j)
    vi += rMj[j]*Vrecv[j][];                   // add  $(\pi_j u_j)|_{\Omega_i}$ 
return true; }
```



6 MPI/Parallel

- Schwarz method with overlap
- Poisson equation with Schwarz method
- Transfer Part
- **simple parallel GMRES**
- A simple Coarse grid solver
- Numerical experiment
- HPDDM



simple parallel GMRES

Finally you can easily accelerate the fixe point algorithm by using a parallel GMRES algorithm after the introduction the following affine \mathcal{S}_i operator sub domain Ω_i .

```
func real[int] Si(real[int]& U) {  
    real[int] V(U.n); b= onG .* U;  
    b = onG ? b : Bi;  
    V = Ai^-1*b; // (8)  
    Update(V,U); // (??)  
    V -= U; return V; }
```

Where the parallel MPIGMRES or MPICG algorithm is to solve $A_i x_i = b_i, i = 1,.., N_p$ by just changing the dot product by reduce the local dot product of all process with the following MPI code:

```
template<class R> R ReduceSum1(R s, MPI_Comm * comm)  
{ R r=0;  
    MPI_Allreduce( &s, &r, 1 ,MPI_TYPE<R>::TYPE(),  
                  MPI_SUM, *comm );  
    return r; }
```



6 MPI/Parallel

- Schwarz method with overlap
- Poisson equation with Schwarz method
- Transfer Part
- simple parallel GMRES
- A simple Coarse grid solver
- Numerical experiment
- HPDDM



A simple coarse grid is we solve the problem on the coarse grid:

```
func bool CoarseSolve(real[int]& V, real[int]& U,
                      mpiComm& comm)
{
    if(AC.n==0 && mpiRank(comm)==0)           // first time build
        AC = vPbC(VhC,VhC,solver=sparsesolver);
    real[int] Uc(Rci.n),Bc(Uc.n);
    Uc= Rci*U;                                // Fine to Coarse
    mpiReduce(Uc,Bc,processor(0,comm),mpiSUM);
    if(mpiRank(comm)==0)
        Uc = AC^-1*Bc;                         // solve of proc 0
    broadcast(processor(0,comm),Uc);
    V = Pci*Uc;                                // Coarse to Fine
}
```



Limitation: if the initial problem, data have oscillation, you must use homogenization technic on coarse problem, or use the F. Nataf and co, preconditionner.



So we finally we get 4 algorithms

- ① The basic schwarz algorithm $u^{\ell+1} = \mathcal{S}(u^\ell)$, where \mathcal{S} is one iteration of schwarz process.
- ② Use the GMRES to find u solution of the linear system $\mathcal{S}u - u = 0$.
- ③ Use the GMRES to solve parallel problem $\mathcal{A}_i u_i = b_i$, $i = 1, \dots, N_p$, with RAS preconditionneur
- ④ Use the method with two level preconditionneur RAS and Coarse.

On the SGI UV 100 of the lab:

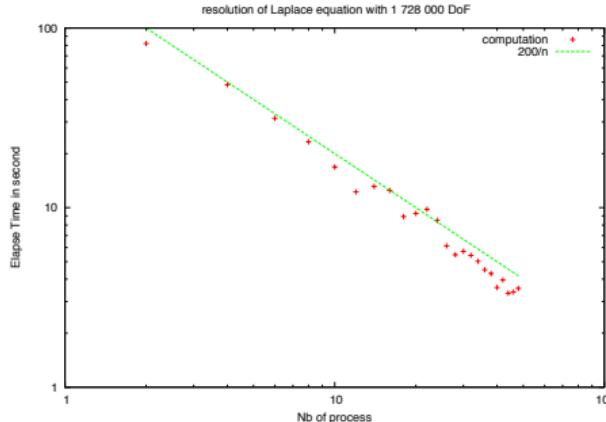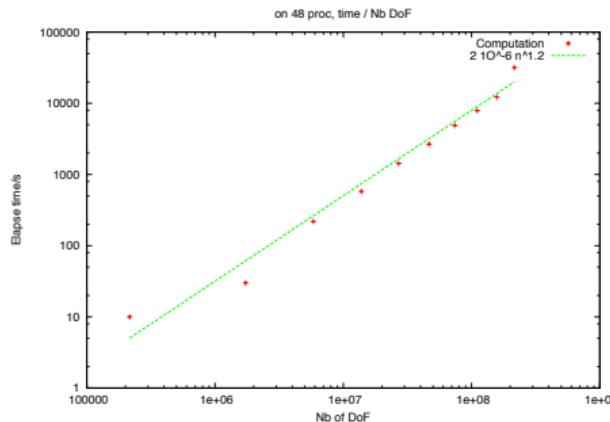

6 MPI/Parallel

- Schwarz method with overlap
- Poisson equation with Schwarz method
- Transfer Part
- simple parallel GMRES
- A simple Coarse grid solver
- Numerical experiment
- HPDDM



A Parallel Numerical experiment on laptop

We consider first example in an academic situation to solve Poisson Problem on the cube $\Omega =]0, 1[^3$

$$-\Delta u = 1, \text{ in } \Omega; \quad u = 0, \text{ on } \partial\Omega. \quad (11)$$

With a cartesian meshes \mathcal{T}_{h_n} of Ω with $6n^3$ tetrahedron, the coarse mesh is $\mathcal{T}_{h_m}^*$, and m is a divisor of n .

We do the validation of the algorithm on a Laptop Intel Core i7 with 4 core at 1.8 Ghz with 4Go of RAM DDR3 at 1067 Mhz,

Run:DDM-Schwarz-Lap-2dd.edp
Run:DDM-Schwarz-Lame-3d.edp

Run:DDM-Schwarz-Lame-2d.edp
Run:DDM-Schwarz-Stokes-2d.edp



6 MPI/Parallel

- Schwarz method with overlap
- Poisson equation with Schwarz method
- Transfer Part
- simple parallel GMRES
- A simple Coarse grid solver
- Numerical experiment
- HPDDM



Reader the book of V. Dolean, P. Jolivet and F. Nataf, An Introduction to Domain Decomposition Methods: algorithms, theory and parallel implementation SIAM bookstore , 2015. ([see pdf](#)), ([see Erratum](#))

Run:diffusion-3d.edp

Run:diffusion-3d-PETSc.edp

Run:elasticity-3d.edp

Run:elasticity-3d-PETSc.edp

Run:Stokes-3d.edp

Run:Stokes-3d-PETSc.edp

Run:helmholtz-2d.edp

Run:helmholtz-2d-PETSc.edp



1 Introduction

2 Tools

3 Academic Examples

4 Bose Einstein Condensate, result analyse

5 Numerics Tools

6 MPI/Parallel

7 Exercices

8 No Linear Problem



7 Exercises

- An exercice: Oven problem
- An exercice: Min surface problem
- Heat equation with thermic resistance
- Benchmark: Navier-Stokes




An exercice: Oven problem

Find the power on the 6 resistors of an oven such that the temperature is close as possible to a given temperature in the region 6.

The equation is the stationary Heat equation in 2d with classical Fourier boundary condition. the mesh of the domain :

let us call the u_p the solution of

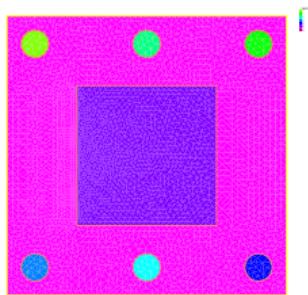

"oven.msh"

Run:mesh-
oven.edp

$$\begin{aligned}-\nabla \cdot K \nabla u_p &= \sum_{i=0}^5 p_i * \chi_i \text{ in } \Omega \\ u + K \nabla u_p \cdot n &= 0 \text{ on } \Gamma = \partial\Omega\end{aligned}$$

where χ_i is the characteristics function of the resistance i , $K = 10$ in region 6, $K = 1$ over where.

The problem is find the array p such that

$$p = \operatorname{argmin} \int_{\Omega_6} (u_p - 100)^2 dx$$



Some remark

build the mesh with multi border trick.

Xh[int] ur(6); // to store the 6 FE. functions Xh
FreeFem++ as only linear solver on sparse matrix by default, but in the lapack
plugin you have access to full matrix solver (see examples++-load/lapack.edp)
so a way to solve a full matrix problem is for example :

```
real[int,int] AP(6,6); // a full matrix
real[int] B(6),PR(6); // to array (vector of size 6)
```

... bla bla to compute AP and B

```
matrix A=AP; // full matrix to sparse or use of
lapack
set(A,solver=CG); // set linear solver to the C.G.
PR=A^-1*B; // solve the linear system.
```

The file name of the mesh is oven.msh, and the region numbers are 0 to 5 for the
resistor, 6 for Ω_6 and 7 for the rest of Ω and the label of Γ is 1.



My solution, build the 6 basics function u_{e_i}

```
int nbresistor=6;           mesh Th("oven.msh");
real[int] pr(nbresistor+2), K(nbresistor+2);
K=1;          K[regi]=10;                                // def K
int regi=nbresistor, rege=nbresistor+1, lext=1;

macro Grad(u) [dx(u),dy(u)]                                // EOM
fespace Xh(Th,P2);    Xh u,v; int iter=0;
problem Chaleur(u,v,init=iter)
= int2d(Th) ( Grad(u)'*Grad(v)* K[region]) +
int1d(Th,lext) (u*v)
+ int2d(Th) (pr[region]*v) ;

Xh[int] ur(nbresistor);                                     // to store the 6  $u_{e_i}$ 
for(iter=0;iter<nbresistor;++iter)
{ pr=0;pr[iter]=1;
Chaleur;
ur[iter][]=u[];
plot(ur[iter],fill=1,wait=1); }
```



Computation of the optimal value

```
real[int,int] AP(nbresitor,nbresitor);
real[int] B(nbresitor),PR(nbresitor);

Xh    ui = 100;
for(int i=0;i<nbresitor;++i)
{
    B[i]=int2d(Th,regi)(ur[i]*ui);
    for(int j=0;j<6;++j)
        AP(i,j)= int2d(Th,regi)(ur[i]*ur[j]);
}
matrix A=AP; set(A,solver=UMFPACK);
PR=A^-1*B;
cout << " P R = " << PR << endl;
u[] =0;
for (int i=0;i<nbresitor;++i)
    u[] += PR[i]*ur[i][];

Run:oven.edp
```



7 Exercices

- An exercice: Oven problem
- An exercice: Min surface problem
- Heat equation with thermic resistance
- Benchmark: Navier-Stokes



An exercice: Min surface problem

The geometrical problem: Find a function $u : C^1(\Omega) \mapsto \mathbb{R}$ where u is given on $\Gamma = \partial\Omega$, (e.i. $u|_{\Gamma} = g$) such that the area of the surface S parametrize by $(x, y) \in \Omega \mapsto (x, y, u(x, y))$ is minimal.

So the problem is $\arg \min J(u)$ where

$$\arg \min J(u) = \int_{\Omega} \left\| \begin{pmatrix} 1 \\ 0 \\ \partial_x u \end{pmatrix} \times \begin{pmatrix} 0 \\ 1 \\ \partial_y u \end{pmatrix} \right\| d\Omega = \int_{\Omega} \sqrt{1 + (\partial_x u)^2 + (\partial_y u)^2} d\Omega$$

So the Euler-Lagrange equation associated to the minimization is:

$$\forall v / v|_{\Gamma} = 0 \quad : \quad DJ(u)v = - \int_{\Omega} \frac{(\partial_x v \partial_x u + \partial_y v \partial_y u)}{\sqrt{1 + (\partial_x u)^2 + (\partial_y u)^2}} d\Omega = 0$$

So find the solution for $\Omega =]0, \pi[^2$ and $g(x, y) = \cos(2 * x) * \cos(2 * y)$. by doing fixed point method , by using the Non Linear Conjugate gradient NLCG like in the example: algo.edp in examples++-tutorial, IPOPT interface, or Newton method.



Fixed Point algorithm (Trivial Algorithm)

```
int nn=10;
mesh Th=square(nn,nn);
fespace Vh(Th,P1); Vh u=0,up,v; // up previous mvalue
func g = cos(pi*x)*cos(2*pi*y);
for(int i=0; i< 100; ++i)
{
    up[] = u[]; // set the previous value by copying the array of dof
    solve Pb(u,v) = int2d(Th) ( (dx(u)*dx(v) + dy(u)*dy(v))
                                /sqrt( 1+ (dx(up)*dx(up) + dy(up)*dy(up)) )
                                +on(1,2,3,4,u=g);
    real area = int2d(Th) ( sqrt(1+ (dx(u)*dx(u) + dy(u)*dy(u)) );
    real err= sqrt(int2d(Th) ( (u-up)^2)); // Error L2
    cout << i << "surface=" << area << "err_L2=" << err << endl
    ;
    plot(u, dim=3, fill=3, cmm=i+"area="+area+"err="+err);
    if(err<1e-5) break;
}
```

Run:minimal-surf-fixed-Point.edp



Example of use of NLCG function:

```

func real J(real[int] & xx) // the functional to minimized
{
  real s=0;
  ...// add code to copy xx array of finite element function
  return s; }

func real[int] DJ(real[int] &xx) // the grad of functional
{
  . . .// add code to copy xx array of finite element
        function
  return xx; }; // return of an existing variable ok

...
NLCG(DJ,xx,eps=1.e-6,nbiter=20,precon=matId);

```

Useful operator on array **real[int]**

```

real[int] a(10),b(10);

...
a = b ? 1. : 0 ; // a[i] = 1 if b[i]; else a[i]=0.  Vi

```

To see the 3D plot of the surface

```
plot(u,dim=3);
```



a solution with NLCG: first functional

```
func g=cos(2*x)*cos(2*y); // valeur au bord
mesh Th=square(20,20,[x*pi,y*pi]); // mesh definition of Ω
fespace Vh(Th,P1);

func real J(real[int] & xx) // the functionnal to minimise
{ Vh u;u[]=xx; // to set FE.function u from xx array
  return int2d(Th) ( sqrt(1 +dx(u)*dx(u) + dy(u)*dy(u)) ) ; }

func real[int] dJ(real[int] & xx) // the grad of the J
{ Vh u;u[]=xx; // to set FE. function u from xx array
  varf au(uh,vh) = int2d(Th) ( ( dx(u)*dx(vh) + dy(u)*dy(vh) )
    / sqrt(1. +dx(u)*dx(u) + dy(u)*dy(u)) )
    + on(1,2,3,4,uh=0);
  return xx= au(0,Vh); } // warning no return of local array
```



Solution 1:

```
Vh u=G;  
verbosity=5; // to see the residual  
int conv=NLCG(dJ,u[],nbiter=500,eps=1e-5);  
cout << " the surface =" << J(u[]) << endl;  
// so see the surface un 3D  
plot(u,dim=3);
```

Run:minimal-surf.edp



7 Exercises

- An exercice: Oven problem
- An exercice: Min surface problem
- Heat equation with thermic resistance
- Benchmark: Navier-Stokes



Heat equation with thermic resistance

let Ω be a domain cut with internal boundary Γ_0 in 2 sub-domain $\Omega_i, (i = 1, 2)$

We have Heat equation (Poisson) on Ω , but on Γ_0 we have a jump $[u]$ on the temperature u proportional to the temperature flux which is continue

So the equation to solve is:

Find u such that $u|_{\Omega_i} \in H(\Omega_i)$ for $i = 1, 2$ and

$$-\nabla \kappa \nabla u = f_i, \quad \text{in } \Omega_i$$

$$\alpha[u] - \kappa \nabla u \cdot n = 0, \quad [\kappa \nabla u \cdot n] = 0, \quad \text{on } \Gamma_0$$

+ external boundary condition on $\partial\Omega$.

For the test you can use:

$L = 3$, $\Omega =]-L, L[\times]0, 1[$, $\Gamma_0 = \{\sin(\pi y)/5, y \in [0, 1]\}$, take $\kappa = i$ in Ω_i .

The external boundary condition on $\partial\Omega$ are: $\kappa \nabla u \cdot n = 0$ on upper and lower boundary ,
 $u = 0$ at the left part, $u = 1$ at the right part.



Method 1: Solve 2 coupled problems and use the block matrix tools to defined the linear system of the problem.



7 Exercises

- An exercice: Oven problem
- An exercice: Min surface problem
- Heat equation with thermic resistance
- Benchmark: Navier-Stokes



An exercice: Navier-Stokes

Try to make the 2d benchmark of :

<http://www.mathematik.tu-dortmund.de/lsiii/cms/papers/SchaeferTurek1996.pdf>

The mesh can be set:

```
int n=15;                                     // parameter ...
real D=0.1, H=0.41;
real cx0 = 0.2, cy0 = 0.2;                     // center of cyl.
real xa = 0.15, ya=0.2, xe = 0.25,ye =0.2;    // point for
pressure..
```



```
border fr1(t=0,2.2){x=t; y=0; label=1;}
border fr2(t=0,H){x=2.2; y=t; label=2;}
border fr3(t=2.2,0){x=t; y=H; label=1;}
border fr4(t=H,0){x=0; y=t; label=1;}
border fr5(t=2*pi,0){x=cx0+D*sin(t)/2; y=cy0+D*cos(t)/2; label=3; }

mesh Th=buildmesh(fr1(5*n)+fr2(n)+fr3(5*n)+fr4(n)+fr5(-n*3));
plot(Th, wait=1);
```



1 Introduction

2 Tools

3 Academic Examples

4 Bose Einstein Condensate, result analyse

5 Numerics Tools

6 MPI/Parallel

7 Exercises

8 No Linear Problem



8 No Linear Problem

- Newton Method
- Navier-Stokes
- Variational Inequality
- Ground water
- Bose Einstein Condensate
- Hyper elasticity equation
- Periodic Surface Acoustic Waves Transducer Analysis
- Phase change with Natural Convection



To solve $F(u) = 0$ the Newton's algorithm is

- ① u^0 a initial guest with correct B.C.
- ② do
 - ① find w^n solution of $DF(u^n)w^n = F(u^n)$, with 0 B.C.
 - ② $u^{n+1} = u^n - w^n$
 - ③ if($\|w^n\| < \varepsilon$) break;

The Optimize Newton Method if $F = C + L + N$, where C is the constant part, L is Linear part and N is Non linear part of F . we have $DF = L + DN$ and $DF(u^n)u^{n+1} = DF(u^n)u^n - F(u^n) = DN(u^n)u^n - N(u^n) - C$. So the change in algorithm are:

- ① u^0 a initial guest
- ② do
 - ① find u^{n+1} solution of $DF(u^n)u^{n+1} = DN(u^n)u^n - N(u^n) - C$
 - ② if($\|u^{n+1} - u^n\| < \varepsilon$) break;

The main advantage is now you can use classical B.C. on the tangent problem, we compute directly the solution not and an increment.



8 No Linear Problem

- Newton Method
- Navier-Stokes
- Variational Inequality
- Ground water
- Bose Einstein Condensate
- Hyper elasticity equation
- Periodic Surface Acoustic Waves Transducer Analysis
- Phase change with Natural Convection



For Navier Stokes problem the Newton algorithm is: $\forall v, q,$

$$F(u, p) = \int_{\Omega} (u \cdot \nabla) u \cdot v + u \cdot v + \nu \nabla u : \nabla v - q \nabla \cdot u - p \nabla \cdot v + BC$$

$$\begin{aligned} DF(u, p)(w, w_p) &= \int_{\Omega} (w \cdot \nabla) u \cdot v + (u \cdot \nabla) w \cdot v \\ &\quad + \int_{\Omega} \nu \nabla w : \nabla v - q \nabla \cdot w - p_w \nabla \cdot v + BC0 \end{aligned}$$

Run:cavityNewton.edp

Run: NSNewtonCyl-100-mpi.edp



$$\frac{\partial u}{\partial t} + (u \cdot \nabla) u - \nu \Delta u + \nabla p = 0, \quad \nabla \cdot u = 0$$

with the same boundary conditions and with initial conditions $u = 0$.

This is implemented by using the interpolation operator for the term $\frac{\partial u}{\partial t} + (u \cdot \nabla) u$, giving a discretization in time

$$\begin{aligned} \frac{1}{\tau}(u^{n+1} - u^n \circ X^n) - \nu \Delta u^{n+1} + \nabla p^{n+1} &= 0, \\ \nabla \cdot u^{n+1} &= 0 \end{aligned} \tag{12}$$

The term $X^n(x) \approx x - \tau u^n(x)$ will be computed by the interpolation operator or convect operator.

Or better we use an order 2 schema, BDF1

$$\frac{\partial u}{\partial t} + (u \cdot \nabla) u \approx \frac{(3u^{n+1} - 4u^n \circ X_1^n + u^{n-1} \circ X_2^n)}{2\tau}$$

with $u^* = 2u^n - u^{n-1}$, and $X_1^n(x) \approx x - \tau u^*(x)$, $X_2^n(x) \approx x - 2\tau u^*(x)$

Run: NSCaracCyl-100-mpi.edp Run: NSUzawaCahouetChabart-3d-aorte.edp



The generalise Stokes problem is find u, p solution of

$$Au + Bp = f, \quad {}^t Bu = 0$$

with $A \equiv (\alpha Id + \nu \Delta)$ and $B \equiv \nabla$, remark if A est symmetric positive the you can use a conjugate gradient to solve the the following problem

$${}^t BA^{-1} B p = {}^t BA^{-1} f$$

Now in a periodic domain, all differential operators commute and the Uzawa algorithm comes to solving the linear operator $-\nabla \cdot ((\alpha Id - \nu \Delta)^{-1} \nabla)$, where Id is the identity operator. So the preconditioner suggested is $-\alpha \Delta^{-1} + \nu Id$.

the term $\frac{\partial u}{\partial t} + (u \cdot \nabla)u$ is the total derivative and discretization in time

$$\begin{aligned} \frac{1}{\tau}(u^{n+1} - u^n \circ X^n) - \nu \Delta u^{n+1} + \nabla p^{n+1} &= 0, \\ \nabla \cdot u^{n+1} &= 0 \end{aligned} \tag{13}$$

The term $X^n(x) \approx x - \tau u^n(x)$ will be computed with convect operator.

Run: NSUzawaCahouetChabart.edp

Run: NSUzawaCahouetChabart-3d-aorte.edp



The ff++ NSI 3d code

```
real alpha =1./dt;
varf vNS([uu1,uu2,uu3,p],[v1,v2,v3,q]) =
int3d(Th)( alpha*(uu1*v1+uu2*v2+uu3*v3)
+ nu*(Grad(uu1)'*Grad(v1)+Grad(uu2)'*Grad(v2) +Grad(uu3)'*Grad(v3))
- div(uu1,uu2,uu3)*q - div(v1,v2,v3)*p + 1e-10*q*p )
+ on(1,2,3,4,5,uu1=0,uu2=0,uu3=0)
+ on(6,uu1=4*(1-x)*(x)*(y)*(1-y),uu2=0,uu3=0)
+ int3d(Th)( alpha*(
    u1(X1,X2,X3)*v1 + u2(X1,X2,X3)*v2 + u3(X1,X2,X3)*v3 ));
A = vNS(Vvh,Vvh);      set(A,solver=UMFPACK);           // build and factorize matrix
real t=0;
for(int i=0;i<50;++)
{ t += dt;   X1[] = XYZ[] - u1[] * dt;                  // set  $\chi = [X1, X2, X3]$  vector
  b=vNS(0,Vvh);                                         // build NS rhs
  u1[] = A^-1 * b;                                       // solve the linear system
  ux= u1(x,0.5,y); uz= u3(x,0.5,y); p2= p(x,0.5,y);
  plot([ux,uz],p2,cmm=" cut y = 0.5, time =" +t,wait=0); }
```

Run: NSI3d.edp



8 No Linear Problem

- Newton Method
- Navier-Stokes
- **Variational Inequality**
- Ground water
- Bose Einstein Condensate
- Hyper elasticity equation
- Periodic Surface Acoustic Waves Transducer Analysis
- Phase change with Natural Convection



Variational Inequality

To solve just make a change of variable $u = u^+ - u^-$, $u > 0$ and $v = u^+ + u^-$, and we get a classical VI problem on u and the Poisson on v .

So we can use the algorithm of Primal-Dual Active set strategy as a semi smooth Newton Method HinterMuller , K. Ito, K. Kunisch SIAM J. Optim. V 13, I 3, 2002.

In this case , we just do all implementation by hand in FreeFem++ language

Run:VI-2-membrane-adap.edp



8 No Linear Problem

- Newton Method
- Navier-Stokes
- Variational Inequality
- **Ground water**
- Bose Einstein Condensate
- Hyper elasticity equation
- Periodic Surface Acoustic Waves Transducer Analysis
- Phase change with Natural Convection




A Free Boundary problem , (phreatic water)

Let a trapezoidal domain Ω defined in FreeFem++:

```
real L=10; // Width
real h=2.1; // Left height
real h1=0.35; // Right height
border a(t=0,L){x=t;y=0;label=1;}; // impermeable  $\Gamma_a$ 
border b(t=0,h1){x=L;y=t;label=2;}; // the source  $\Gamma_b$ 
border f(t=L,0){x=t;y=t*(h1-h)/L+h;label=3;}; //  $\Gamma_f$ 
border d(t=h,0){x=0;y=t;label=4;}; // Left impermeable  $\Gamma_d$ 
int n=10;
mesh Th=buildmesh (a(L*n)+b(h1*n)+f(sqrt(L^2+(h-h1)^2)*n)+d(h*n));
plot(Th,ps="dTh.eps");
```



The initial mesh

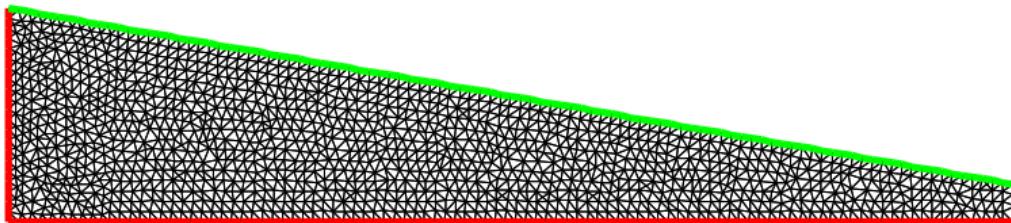

The problem is: find p and Ω such that:

$$\begin{cases} -\Delta p = 0 & \text{in } \Omega \\ p = y & \text{on } \Gamma_b \\ \frac{\partial p}{\partial n} = 0 & \text{on } \Gamma_d \cup \Gamma_a \\ \frac{\partial p}{\partial n} = \frac{q}{K} n_x & \text{on } \Gamma_f \quad (\text{Neumann}) \\ p = y & \text{on } \Gamma_f \quad (\text{Dirichlet}) \end{cases}$$

where the input water flux is $q = 0.02$, and $K = 0.5$. The velocity u of the water is given by $u = -\nabla p$.



algorithm

We use the following fix point method: (*with bad main B.C. Run:freeboundaryPB.edp*) let be, $k = 0$, $\Omega^k = \Omega$. First step, we forgot the Neumann BC and we solve the problem:
Find p in $V = H^1(\Omega^k)$, such $p = y$ on Γ_b^k et on Γ_f^k

$$\int_{\Omega^k} \nabla p \nabla p' = 0, \quad \forall p' \in V \text{ with } p' = 0 \text{ on } \Gamma_b^k \cup \Gamma_f^k$$

With the **residual of the Neumann boundary condition** we build a domain transformation $\mathcal{F}(x, y) = [x, y - v(x)]$ where v is solution of: $v \in V$, such than $v = 0$ on Γ_a^k (bottom)

$$\int_{\Omega^k} \nabla v \nabla v' = \int_{\Gamma_f^k} \left(\frac{\partial p}{\partial n} - \frac{q}{K} n_x \right) v', \quad \forall v' \in V \text{ with } v' = 0 \text{ sur } \Gamma_a^k$$

remark: we can use the previous equation to evaluate

$$\int_{\Gamma^k} \frac{\partial p}{\partial n} v' = - \int_{\Omega^k} \nabla p \nabla v'$$



Implementation

The new domain is: $\Omega^{k+1} = \mathcal{F}(\Omega^k)$ Warning if is the movement is too large we can have triangle overlapping.

```
problem Pp(p,pp,solver=CG) =
    int2d(Th) ( dx(p)*dx(pp)+dy(p)*dy(pp) )
    + on(b,f,p=y) ;
problem Pv(v,vv,solver=CG) =
    int2d(Th) ( dx(v)*dx(vv)+dy(v)*dy(vv) )
    + on(a, v=0)
    + int1d(Th,f) (vv*
        ((Q/K)*N.y-(dx(p)*N.x+dy(p)*N.y)) );
while(errv>1e-6)
{
    j++; Pp; Pv;     errv=int1d(Th,f) (v*v);
    coef = 1;
//      Here french cooking if overlapping see the example
    Th=movemesh(Th, [x,y-coef*v]);           //      deformation
}
Run:freeboundary.edp
```



8 No Linear Problem

- Newton Method
- Navier-Stokes
- Variational Inequality
- Ground water
- Bose Einstein Condensate
- Hyper elasticity equation
- Periodic Surface Acoustic Waves Transducer Analysis
- Phase change with Natural Convection



Bose Einstein Condensate

Just a direct use of Ipopt interface (2day of works)

The problem is find a complex field u on domain \mathcal{D} such that:

$$u = \underset{\|u\|=1}{\operatorname{argmin}} \int_{\mathcal{D}} \frac{1}{2} |\nabla u|^2 + V_{trap} |u|^2 + \frac{g}{2} |u|^4 - \Omega i \bar{u} \left(\begin{pmatrix} -y \\ x \end{pmatrix} \cdot \nabla \right) u$$

to code that in FreeFem++

use

- Ipopt interface (<https://projects.coin-or.org/Ipopt>)
- Adaptation de maillage

Run:BEC.edp



8 No Linear Problem

- Newton Method
- Navier-Stokes
- Variational Inequality
- Ground water
- Bose Einstein Condensate
- **Hyper elasticity equation**
- Periodic Surface Acoustic Waves Transducer Analysis
- Phase change with Natural Convection



Hyper elasticity equation

The Hyper elasticity problem is the minimization of the energy $W(I_1, I_2, I_3)$ where I_1, I_2, I_3 are the 3 invariants. For example The Ciarlet Geymonat energy model is

$$W = \int_{\Omega} \kappa_1(J_1 - 3) + \kappa_2(J_2 - 3) + \kappa(J - 1) - \kappa \ln(J)$$

where $J_1 = I_1 I_3^{-\frac{1}{3}}$, $J_2 = I_2 I_3^{-\frac{2}{3}}$, $J = I_3^{\frac{1}{2}}$,

let u the deplacement, when

- $F = I_d + \nabla u$
- $C = {}^t F F$
- $I_1 = \text{tr}(C)$
- $I_2 = \frac{1}{2}(\text{tr}(C)^2 - \text{tr}(C^2))$
- $I_3 = \det(C)$

The problem is find

$$u = \underset{u}{\operatorname{argmin}} W(I_1, I_2, I_3)$$



Hyper elasticity equation

```
fespace Wh(Th, [P2,P2]);
//      methode de Newton ..

Wh [d1,d2]=[0,0];
Wh [w1,w2], [v1,v2];
for(int i=0;i<Nnewton;++i)
{
    solve dWW([w1,w2], [v1,v2]) =
        int2d(Th) ( ddW2d([d1,d2], [w1,w2], [v1,v2]) )
        - int2d(Th) ( dw2d([d1,d2], [v1,v2]) -[v1,v2]'*[f1,f2] )
        + on(1,w1=0,w2=0);

    d1[] -= w1[];
    real err = w1[].linfty;
    if(err< epsNewton) break;
}
```

Run:Hyper-Elasticity-2d.edp

see:ElasticLaw2d.idp

see:CiarletGemona.idp



8 No Linear Problem

- Newton Method
- Navier-Stokes
- Variational Inequality
- Ground water
- Bose Einstein Condensate
- Hyper elasticity equation
- Periodic Surface Acoustic Waves Transducer Analysis
- Phase change with Natural Convection



A true industrial numerical problem (2d) :

- ① 3 EDP: Dielectric, Elasticity, Piezoelectric , Linear, harmonic approximation
- ② α -periodic B.C. (New simple idea)
- ③ semi-infinite Dielectric domain (classical Fourier/Floquet transforme)
- ④ semi-infinite Piezoelectric domain (Hard)


In 9 month, we build with P. Ventura (100%, me 10%) a numerical simulator form scratch (8 months for the validation), The only thing to add to freefem++ is a interface with lapack to compute eigenvector of full 8×8 matrix.

A good message : [Les calculs des paramètres physiques des transducteurs dans la bande d'arrêt et les évaluations de capacité statiques sont très satisfaisants par rapport aux résultats expérimentaux !](#)



In the dielectric medium Ω_d ,

$$\mathbf{D} = \varepsilon_d \mathbf{E} \quad (14)$$

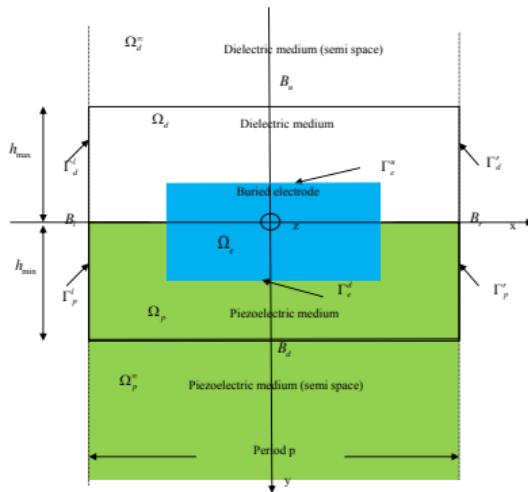

In the elastic medium Ω_e

$$\mathbf{T} = \mathbf{C}_e : \mathbf{S} \quad (15)$$

With \mathbf{C}_e is the elastic tensor for the elastic metallic domain. In the **piezoelectric domain**

$$\begin{cases} \mathbf{T} = \mathbf{C}_p^E : \mathbf{S} - \mathbf{e} \mathbf{E} \\ \mathbf{D} = \mathbf{e}^T \mathbf{S} + \varepsilon \mathbf{S} \mathbf{E} \end{cases} \quad (16)$$

The material domain Ω_m obeys Newton's second law:

$$\nabla \cdot \mathbf{T} = \rho \frac{\partial^2 \mathbf{u}}{\partial t^2} \quad (17)$$

The quasi static Maxwell's equation is assumed for the whole domain Ω :

$$\nabla \cdot \mathbf{D} = 0 \quad (18)$$

By using the divergence relationship and the Green's integral formula, it results the general weak formulation of the periodic γ -harmonic problem:



The variational form

Find (\mathbf{u}, ϕ) in $V_\gamma^3(\Omega_m) \times V_\gamma(\Omega)$ (verifying the equipotential boundary condition in the electrode), such that for all (\mathbf{v}, ψ) in $V_\gamma^3(\Omega_m) \times V_\gamma^3(\Omega)$, satisfying the zero equi potential boundary condition), we have:

$$\begin{aligned} \int_{\Omega_m} \overline{\mathbf{S}(\mathbf{v})} : \mathbf{T}(\mathbf{u}) \, d\Omega - \omega^2 \int_{\Omega_m} \rho \, \bar{\mathbf{v}} \cdot \mathbf{u} \, d\Omega \\ - \int_{\Omega} \overline{\mathbf{E}(\psi)} \cdot (\mathbf{e}\mathbf{S}(\mathbf{u}) + \varepsilon \mathbf{E}(\phi)) \, d\Omega \\ - \int_{\Gamma_d} \bar{\mathbf{v}} \cdot (\mathbf{T}(\mathbf{u}) \cdot \mathbf{n}) \, d\Gamma - \int_{\Gamma_u \cup \Gamma_d} \bar{\psi} (\mathbf{D}(\phi) \cdot \mathbf{n}) \, d\Gamma = 0 \quad (19) \end{aligned}$$

With, $V_\gamma(\Omega)$ is the mathematical space of $L^2(\Omega)$ with the derivative in $L^2(\Omega)$ satisfying γ -harmonic periodic boundary conditions.



The γ -harmonic periodic boundary trick

Let us first define $\varphi_\gamma(x) = e^{-j2\pi\gamma\frac{x}{p}}$, $\varphi_\gamma(x)$ is a γ -harmonic periodic function satisfying:

$$\varphi_\gamma(x + p) = e^{-j2\pi\gamma} \varphi_\gamma(x) \quad (20)$$

We just do the change of variable:

$$\begin{cases} \mathbf{u}(x, y) = \varphi_\gamma(x) \mathbf{u}^\diamond(x, y) \\ \phi(x, y) = \varphi_\gamma(x) \phi^\diamond(x, y) \end{cases} \quad (21)$$

Where $\mathbf{u}^\diamond(x)$ and $\phi^\diamond(x)$ are p -periodic functions.

The main idea is to define a new differential operator ∇_γ by:

$$\nabla_\gamma \mathbf{u}^\diamond = \nabla(\varphi_\gamma \mathbf{u}^\diamond) = \varphi_\gamma \nabla \mathbf{u}^\diamond + \varphi_\gamma' \mathbf{u}^\diamond \quad (22)$$

Because the physical fields \mathbf{E} , \mathbf{D} , \mathbf{T} , and \mathbf{S} are expressed using partial derivative of \mathbf{u} , and, ϕ , it is possible to define the operators $\mathbf{E}_\gamma(\phi^\diamond) = \mathbf{E}(\varphi_\gamma \phi^\diamond)$, $\mathbf{D}_\gamma(\phi^\diamond) = \mathbf{D}(\varphi_\gamma \phi^\diamond)$, $\mathbf{T}_\gamma(\mathbf{u}^\diamond) = \mathbf{T}(\varphi_\gamma \mathbf{u}^\diamond)$,



The new variational form with period BC.

Find $(\mathbf{u}^\diamond, \phi^\diamond)$ in $V_1^3(\Omega_m) \times V_1(\Omega)$ (verifying the equipotential boundary condition), such that for all $(\mathbf{v}^\diamond, \psi^\diamond)$ in $V_1^3(\Omega_m) \times V_1^3(\Omega)$, satisfying the zero equipotential boundary condition), we have:

$$\begin{aligned} & \int_{\Omega_m} \overline{\mathbf{S}_\gamma(\mathbf{v}^\diamond)} : \mathbf{T}_\gamma(\mathbf{u}^\diamond) d\Omega - \omega^2 \int_{\Omega_m} \rho \overline{\mathbf{v}^\diamond} \cdot \overline{\mathbf{u}^\diamond} d\Omega \\ & \quad - \int_{\Omega} \overline{\mathbf{E}_\gamma(\psi^\diamond)} \cdot (\mathbf{e} \mathbf{S}_\gamma(\mathbf{u}^\diamond) + \varepsilon \mathbf{E}_\gamma(\phi^\diamond)) d\Omega \\ & \quad - \int_{\Gamma_d} \overline{\varphi_\gamma \mathbf{v}^\diamond} \cdot (\mathbf{T}_\gamma(\mathbf{u}^\diamond) \mathbf{n}) d\Gamma - \int_{\Gamma_u \cup \Gamma_d} \overline{\varphi_\gamma \psi^\diamond} (\mathbf{D}_\gamma(\phi^\diamond) \cdot \mathbf{n}) d\Gamma = 0 \quad (23) \end{aligned}$$

Where, $V_1(\Omega)$ is the mathematical space of $L^2(\Omega)$ with derivative in $L^2(\Omega)$ satisfying p-periodic boundary conditions.



We have to modelized the following term:

$$-\int_{\Gamma_d} \overline{\varphi_\gamma \mathbf{v}^\diamond} \cdot (\mathbf{T}_\gamma(\mathbf{u}^\diamond) \mathbf{n}) d\Gamma - \int_{\Gamma_u \cup \Gamma_d} \overline{\varphi_\gamma \psi^\diamond} (\mathbf{D}_\gamma(\phi^\diamond) \cdot \mathbf{n}) d\Gamma, \quad (24)$$

also called border terms.

First from (24), let us look at the boundary integral A_{Γ_u} , at the interface Γ_u of the semi-infinite dielectric semi-space.

$$A_{\Gamma_u} = \int_{\Gamma_u} \overline{\varphi_\gamma \psi^\diamond} \mathbf{D}_\gamma(\phi^\diamond) \cdot \mathbf{n} d\Gamma \quad (25)$$



The elementary coefficients to compute are for all finite element basic functions w^\diamond_i introduce in (??), only for node $i \in \mathcal{N}_u$ the set of node on Γ_u .

$$\forall (i, j) \in \mathcal{N}_u^2, \quad (A_{\Gamma_u})_{ij} = -\varepsilon_d \int_{\Gamma_u} \overline{\varphi_\gamma w^\diamond_i} \partial_n (\varphi_\gamma w^\diamond_j) d\Gamma \quad (26)$$

According [2], it is possible to expand, at the interface Γ_u the γ -harmonic periodic $\varphi_\gamma w^\diamond_j$ into the Floquet's basis function

$$f_m(x, y) = e^{-2\pi(j(m+\gamma)x - |m+\gamma|((y-y_u))/p)} = \varphi_\gamma(x) f^\diamond_m(x, y). \quad (27)$$

where y_u is the y coordinate of Γ_u .

$$\varphi_\gamma(x) w^\diamond_j(x, y) = \sum_{m=-\infty}^{+\infty} c_m^j f_m(x, y) \quad (28)$$

With the $L^2(\Gamma_u)$ orthogonality of Fourier's basis f^\diamond_m , we have:

$$c_m^j = \frac{1}{p} \int_{\Gamma_u} w^\diamond_j \overline{f^\diamond_m} d\Gamma, \quad (29)$$



and on Γ_u the normal derivative $\partial_n f_m(x, y) = \partial_y f_m(x, y)$ satisfies:

$$\partial_n f_m = -g_m f_m, \quad \text{with } g_m = \frac{2\pi}{p} |\gamma + m| \quad (30)$$

Leading to the relationship:

$$\partial_n (\varphi_\gamma w^\diamond_j) = - \sum_{m=-\infty}^{+\infty} c_m^j g_m f_m \quad (31)$$

Finally the term $(A_{\Gamma_u})_{ij}$ is

$$(A_{\Gamma_u})_{ij} = \frac{\varepsilon_d}{p} \sum_{m=-\infty}^{+\infty} g_m \int_{\Gamma_u} \overline{w^\diamond}_i f^\diamond_m d\Gamma \int_{\Gamma_u} w^\diamond_j \overline{f^\diamond}_m d\Gamma \quad (32)$$

Run:BEM.edp



8 No Linear Problem

- Newton Method
- Navier-Stokes
- Variational Inequality
- Ground water
- Bose Einstein Condensate
- Hyper elasticity equation
- Periodic Surface Acoustic Waves Transducer Analysis
- Phase change with Natural Convection



Phase change with Natural Convection

The starting point of the problem is Brainstorming session (part I) of the third FreeFem++ days in december 2011, this is almost the Orange Problem is describe in web page

<http://www.ljll.fr/~hecht/ftp/ff++days/2011/Orange-problem.pdf>.

The coupling of natural convection modeled by the Boussinesq approximation and liquid to solid phase change in $\Omega =]0, 1[^2$, No slip condition for the fluid are applied at the boundary and adiabatic condition on upper and lower boundary and given temperature θ_r (resp θ_l) at the right and left boundaries.

The model is: find the field : the velocity $\mathbf{u} = (u_1, u_2)$, the pressure p and temperature θ :

$$\left\{ \begin{array}{lll} \mathbf{u} & \text{given} & \text{in } \Omega_s \\ \partial_t \mathbf{u} + (\mathbf{u} \nabla) \mathbf{u} + \nabla \cdot \mu \nabla \mathbf{u} + \nabla p & = -c_T \mathbf{e}_2 & \text{in } \Omega_f \\ \nabla \cdot \mathbf{u} & = 0 & \text{in } \Omega_f \\ \partial_t \theta + (\mathbf{u} \nabla) \theta + \nabla \cdot k_T \nabla \theta & = \partial_t S(T) & \text{in } \Omega \end{array} \right. \quad (33)$$

Where Ω_f is the fluid domain and the solid domain is $\Omega_s = \Omega \setminus \Omega_f$.



Phase change with Natural Convection

The enthalpy of the change of phase is given by the function S ; μ is the relative viscosity, k_T the thermal diffusivity.

In $\Omega_f = \{x \in \Omega; \theta > \theta_f\}$, with θ_m the melting temperature the solid has melt.
We modeled, the solid phase as a fluid with huge viscosity, so :


$$\mu = \begin{cases} \theta < \theta_f & \sim 10^6 \\ \theta \geq \theta_m & \sim \frac{1}{Re} \end{cases},$$

The Stefan enthalpy S_c with defined by $S_c(\theta) = H(\theta)/S_{th}$ where S_{th} is the stefan number, and H is the Heaviside function with use the following smooth the enthalpy:

$$S(\theta) = \frac{\tanh(50(\theta - \theta_m))}{2S_{th}}.$$



The true device

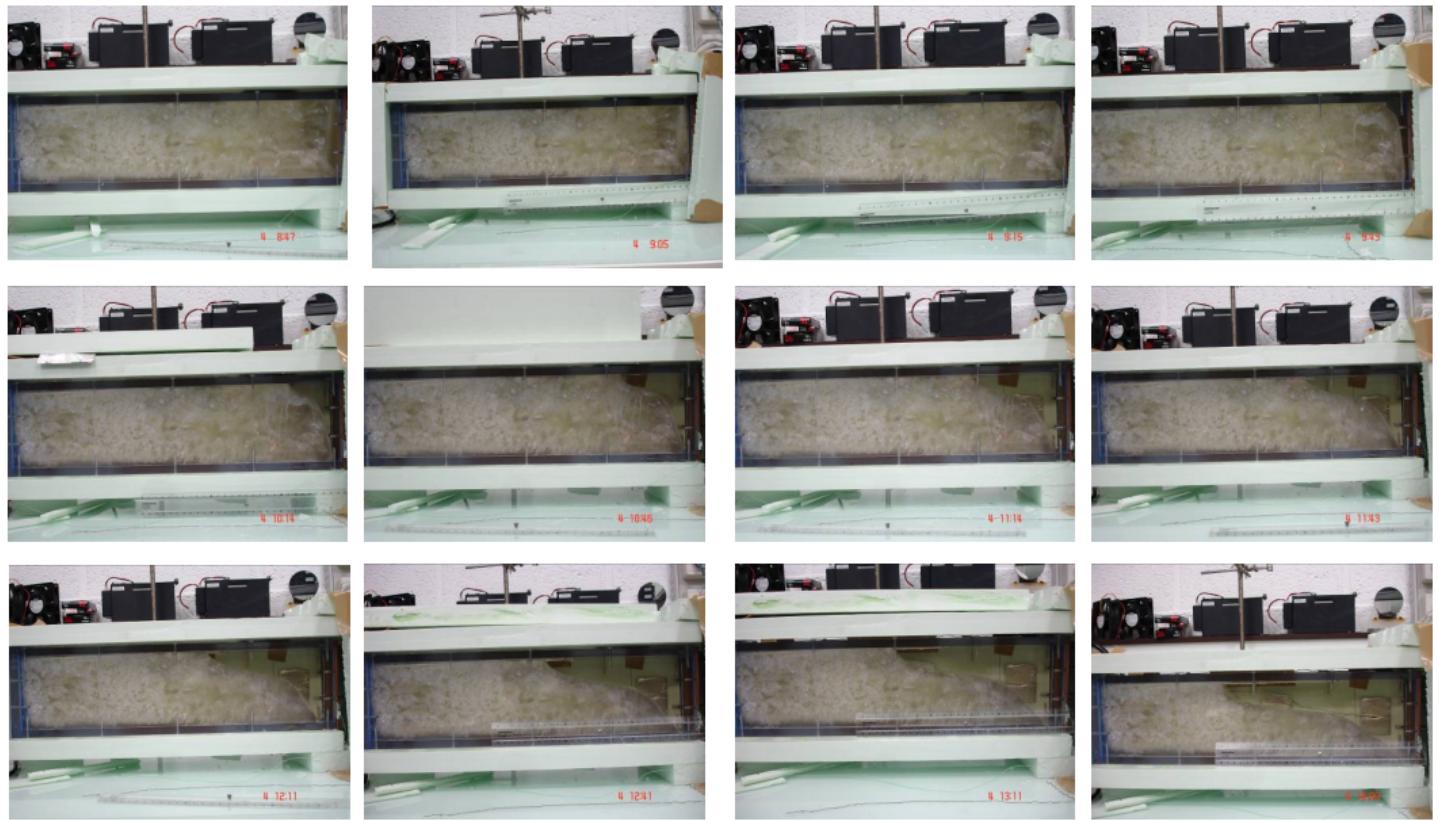

the Algorithm

We apply a fixed point algorithm for the phase change part (the domain Ω_f is fixed at each iteration) and a full no-linear Euler implicit scheme with a fixed domain for the rest. We use a Newton method to solve the non-linearity.

- if we don't make mesh adaptation, the Newton method do not converge
- if we use explicit method diverge too,
- if we implicit the dependance in Ω_s the method also diverge.

This is a really difficult problem.



The finite element space to approximate $u1, u2, p, \theta$ is defined by

```
fespace Wh(Th, [P2,P2,P1,P1]);
```

We do mesh adaptation a each time step, with the following code:

```
Ph ph = S(T), pph=S(Tp);  
Th= adaptmesh(Th, T, Tp, ph, pph, [u1,u2], err=errh,  
               hmax=hmax, hmin=hmax/100, ratio = 1.2);
```

This mean, we adapt with all variable plus the 2 melting phase a time $n + 1$ and n and we smooth the metric with a ratio of 1.2 to account for the movement of the melting front.



The Newton loop

the fixed point are implemented as follows

```
real err=1e100,errp ;
for(int kk=0;kk<2;++kk) // 2 step of fixe point on  $\Omega_s$ 
{ nu = nuT; // recompute the viscosity in  $\Omega_s, \Omega_f$ 
  for(int niter=0;niter<20; ++ niter) // newton loop
    { BoussinesqNL;
      err = ulw[].linfty;
      cout << niter << "err_NL" << err << endl;
      ul[] -= ulw[];
      if(err < tolNewton) break; } // convergence ..
}
```



The linearized problem

```
problem BoussinesqNL([ulw,u2w,pw,Tw],[v1,v2,q,TT])
= int2d(Th) (
    [ulw,u2w,Tw]'*[v1,v2,TT]*cdt
    + UgradV(u1,u2,ulw,u2w,Tw)' * [v1,v2,TT]
    + UgradV(ulw,u2w,u1,u2,T)' * [v1,v2,TT]
    + ( Grad(ulw,u2w)'*Grad(v1,v2)) * nu
    + ( Grad(u1,u2)'*Grad(v1,v2)) * dnu* Tw
    + cmT*Tw*v2 + grad(Tw)'*grad(TT)*kT
    - div(ulw,u2w)*q -div(v1,v2)*pw - eps*pw*q
    + dS(T)*Tw*TT*cdt )
- int2d(Th) (
    [u1,u2,T]'*[v1,v2,TT]*cdt
    + UgradV(u1,u2,u1,u2,T)' * [v1,v2,TT]
    + ( Grad(u1,u2)'*Grad(v1,v2)) * nu
    + cmT*T*v2 - eps*p*q + grad(T)'*grad(TT)*kT
    - div(u1,u2)*q -div(v1,v2)*p
    + S(T)*TT*cdt - [u1p,u2p,Tp]'*[v1,v2,TT]*cdt
    - S(Tp)*cdt*TT)
+ on(1,2,3,4, ulw=0,u2w=0)+on(2,Tw=0)+on(4,Tw=0) ;
```



The parameters of the computation



take case 2 from

Shimin Wang, Amir Faghri, and Theodore L. Bergman. A comprehensive numerical model for melting with natural convection. *International Journal of Heat and Mass Transfer*, January 2010.

$\theta_m = 0$, $Re = 1$, $S_{te} = 0.045$, $P_r = 56.2$, $R_a = 3.27 \cdot 10^5$, $\theta_l = 1$, $\theta_r = -0.1$ so in this case $cmT = c_T = -R_a/P_r$, $kT = k_T = 1/P_r$, $\text{eps} = 10^{-6}$, time step $\delta t = 10^{-1}$, $c dt = 1/\delta t$, at time $t = 80$ and we get a good agreement with the article.



Phase change with Natural Convection

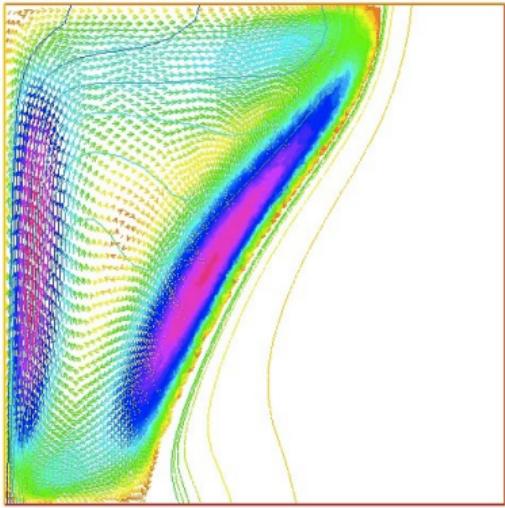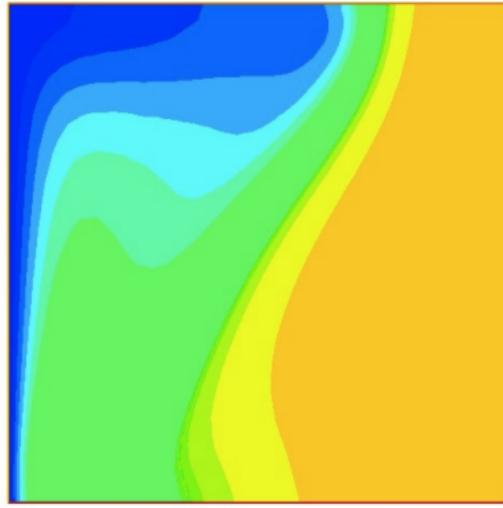

So now, a real problem, get the physical parameter of the real experiment.
Run:Orange-Newton.edp

1 Introduction

2 Tools

3 Academic Examples

4 Bose Einstein Condensate, result analyse

5 Numerics Tools

6 MPI/Parallel

7 Exercises

8 No Linear Problem



9 Technical Remark on freefem++

- compilation process
- Plugin
- Plugin to read image
- Plugin of link code through a pipe
- FreeFem++ et C++ type



compilation process on Windows

Read the page <http://www3.freefem.org/ff++/windows.php>



9 Technical Remark on freefem++

- compilation process
- **Plugin**
- Plugin to read image
- Plugin of link code through a pipe
- FreeFem++ et C++ type



Dynamics Load facility

Or How to add your C++ function in FreeFem++.

First, like in cooking, the first true difficulty is how to use the kitchen.

I suppose you can compile the first example for the examples++-load

```
numerical11:FH-Seville hecht# ff-c++ myppm2rnm.cpp
```

```
...
```

```
add tools to read pgm image
```



9 Technical Remark on freefem++

- compilation process
- Plugin
- Plugin to read image
- Plugin of link code through a pipe
- FreeFem++ et C++ type



The interesting code

```
#include "ff++.hpp"
typedef KNM<double> * pRnm; // real[int,int] array variable type
typedef KN<double> * pRn; // real[int] array variable type
typedef string ** string; // the ff++ string variable type
                           // the function to read image

pRnm read_image( pRnm const & a,const pstring & b); // the function to set 2d array from 1d array

pRn seta( pRn const & a,const pRnm & b)
{ *a=*b;
  KN_<double> aa=*a;
  return a; }

void Init(){ // the link with FreeFem++
// add ff++ operator "<-" constructor of real[int,int] form a string
TheOperators->Add("<-",
  new OneOperator2_<KNM<double> *,KNM<double> *,string*>(&read_image) );
// add ff++ an affection "=" of real[int] form a real[int,int]
TheOperators->Add("=",
  new OneOperator2_<KN<double> *,KN<double> *,KNM<double>*>(&seta));
}
LOADFUNC(Init); // to call Init Function at load time
```

Remark, **TheOperators** is the ff++ variable to store all world operator, **Global** is to store function.



9 Technical Remark on freefem++

- compilation process
- Plugin
- Plugin to read image
- **Plugin of link code through a pipe**
- FreeFem++ et C++ type



How to extend

A true simple example How to make dynamic gnuplot

Idea: use a pipe to speak with gnuplot the C code :

```
FILE * gp = popen("gnuplot");
for( double f=0; f < 3.14; f += 0.01)
    fprintf(gp,"plot sin(x+%f) \n",f);
```

To do this add a new constructor of ofstream in freefem++



A way to pass info between to code

Make a pipe, under unix (with a use of pstream tools)

```
#include "ff++.hpp"
#include "pstream.h"
typedef redi::pstream pstream;
typedef std::string string;
static pstream ** pstream_init(pstream **const & p, string * const & a)
{ *p = new pstream(a->c_str());
  return p; }

void inittt()
{
    // add new pointer type * pstream
Dcl_TypeandPtr<pstream*>(0,0,::InitializePtr<pstream*>,::DeletePtr<pstream*>);
    // add cast operation to make std iostream read and write
atype<iostream*>()->AddCast( new E_F1_funcT<iostream*,pstream**>(UnRef<iostream*>));
atype<ostream*>()->AddCast( new E_F1_funcT<ostream*,pstream**>(UnRef<ostream*>));
    // the constructor from a string .
TheOperators->Add("<-",new OneOperator2<pstream**,pstream**,string*>(pstream_init) );
    // add new keyword type pstream
zzzfff->Add("pstream",atype<pstream **>());
}
LOADFUNC(inittt);
t
```

```
MBP-FH:plugin hecht$ ff-c++ pipe.cpp
/usr/local/bin/g++ -c -g -m64 -fPIC -DNDEBUG -O3 -DBAMG_LONG_LONG -DNCHECKPTR -fPIC -I/usr/local/lib/ff++/3.20/include
/usr/local/bin/g++ -bundle -undefined dynamic_lookup -g -m64 -fPIC -DNDEBUG -O3 -DBAMG_LONG_LONG -DNCHECKPTR -fPIC 'pipe'
```

a small test : Run:gnuplot.edp



9 Technical Remark on freefem++

- compilation process
- Plugin
- Plugin to read image
- Plugin of link code through a pipe
- FreeFem++ et C++ type



FreeFem++ et C++ type

The tools to add a operator with 2 arguments:

```
OneOperator2_<returntype ,typearg1 ,typearg2>(& thefunction );
returntype thefunction(typearg1 const &, typearg2 const &)
```

To get the C++ type of all freefem++ type, method, operator, just do in examples++-tutorial directory

```
c++filt -t < lestables
Cmatrix 293 Matrice_Creuse<std::complex<double> >
R3 293 Fem2D::R3
bool 293 bool*
complex 293 std::complex<double>*
element 293 (anonymous namespace)::lgElement
func 294 C_F0
    ifstream 293 std::basic_istream<char, std::char_traits<char> >**
int 293 long*
matrix 293 Matrice_Creuse<double>
mesh 293 Fem2D::Mesh**
mesh3 293 Fem2D::Mesh3**
ofstream 293 std::basic_ofstream<char, std::char_traits<char> >**
problem 294 Problem
real 293 double*
solve 294 Solve
string 293 std::basic_string<char, std::char_traits<char>, std::allocator<char> >**
varf 294 C_args
vertex 293 (anonymous namespace)::lgVertex
```



FreeFem++ Triangle/Tet capabylity

```
// soit T un Element de sommets A,B,C ∈ ℝ2
// -----
Element::nv ;                                // number of vertices of triangle (here 3)
const Element::Vertex & V = T[i];           // the vertex i of T (i ∈ {0,1,2})
double a = T.mesure();                      // mesure of T
Rd AB = T.Edge(2);                          // edge vector
Rd hC = T.H(2);                            // gradient of 2 base fonction
R l = T.lenEdge(i);                        // length of i edge oppose of i
(Label) T ;                                 // label of T (region number)
R2 G(T(R2(1./3,1./3)));                  // The barycentre of T in 3d
```



FreeFem++ Mesh/Mesh3 capability

```
Mesh Th("filename");                                // read the mesh in "filename"
Th.nt ;                                         // number of element (triangle or tet)
Th.nv ;                                         // number of vertices
Th.neb or Th.nbe ;                            // number of border element (2d) or (3d)
Th.area;                                         // area of the domain (2d)
Th.peri;                                         // length of the border
typedef Mesh::Rd Rd;
Mesh2::Element & K = Th[i];
Rd A=K[0];
Rd G=K(R2(1./3,1./3));
Rd DLambda[3];
K.Gradlambda(DLambda);                         // compute the 3  $\nabla \lambda_i^K$  for  $i = 0, 1, 2$ 
Mesh::Vertex & V = Th(j);
Mesh::BorderElement & BE=th.be(l);
Rd B=BE[1];
Rd M=BE(0.5);
int j = Th(i,k);                           // global number of vertex  $k \in [0, 3[$  of tria.  $i \in [0, nt[$ 
Mesh::Vertex & W=Th[i][k];                   // vertex  $k \in [0, 3[$  of triangle  $i \in [0, nt[$ 

int ii = Th(K) ;                           // number of triangle K
int jj = Th(V) ;                           // number of triangle V
int ll = Th(BE) ;                          // number of Seg de bord BE
assert( i == ii && j == jj) ;           // check.
```



Freefem++ v4 is

- very good tool to solve non standard PDE in 2D/3D and of surface
- to try new domain decomposition domain algorithm

The the future we try to do:

- Build more graphic with VTK, paraview , ... (in progress)
- 3d anisotrope mesh adaptation (see new version mmg3d software [at page 67](#))
- automate the parallel tool (in progress)
- Add integral method (A. Fourmont) , and finite volume (See G. Sadaka).

Thank for you attention.

