

Table of Contents

TLS For IoT

| | | |
|-----|--|----|
| 1 | Introduction | 1 |
| 2 | Background | 3 |
| 2.1 | Symmetric vs Asymmetric Cryptography | 3 |
| 2.2 | Public Certificates and Certificate Chains | 3 |
| 2.3 | AEAD Ciphers | 4 |
| 2.4 | Elliptic Curve Cryptography | 4 |
| 2.5 | The TLS Protocol | 4 |
| 2.6 | DLTS | 16 |
| 3 | Related Work | 16 |
| 4 | Solution | 25 |
| 4.1 | Solution Architecture | 25 |
| 4.2 | Evaluation | 27 |
| 4.3 | Planning | 27 |
| 4.4 | Conclusion | 27 |

Transport Layer Security Protocol For Internet Of Things

Illya Gerasymchuk
illya.gerasymchuk@tecnico.uliboa.pt,
WWW home page: <https://iluxonchik.github.io/>

Instituto Superior Tcnico
Supervisors: Ricardo Chaves, Aleksandar Ilic

Abstract. This paper explores the idea of developing a lightweight Transport Layer Security (TLS) protocol for the Internet Of Things (IoT). It begins by explaining why there is a need for security in the IoT ecosystem and why TLS, as it is, cannot be used in most cases, due to the constrained nature of many IoT devices. Next, the state of the art in the area is described, most of which is done for Datagram TLS (DTLS), but can also be applied to TLS, since DTLS is just an adaptation of TLS for unreliable transport protocols, such as UDP. The document proceeds with a summary of TLS 1.2, outline its main differences from TLS 1.3 and give an overview of the how DTLS differs from TLS. Finally, the architecture of the solution that will be developed, which relies heavily on the use of the TLS extension mechanism, is presented.

Keywords: TLS, DTLS, SSL, IoT, cryptography, protocol, lightweight cryptography

1 Introduction

The IoT is a network of devices, from simple sensors to smartphones and wearables that are connected together. In fact, it can be any other object that has an assigned IP address and is provided with the ability to transfer data over a network. Even something such as a salt shaker[4] can now be part of the global network.

The IoT technology can be used solve problems and make our lives easier, unfortunately, however, its technological development tends to focus on innovative design rather than on privacy and security. IoT devices frequently connect to networks using inadequate security and are hard to update when vulnerabilities are found.

This lack of security in the IoT ecosystem has been exploited by the the *Mirai* botnet[5] when it overwhelmed several high-profile targets with massive Distributed Denial-Of-Service (DDoS) attacks. This is the most devastating attack involving IoT devices done to date, the *Reaper* botnet[38], however, could be even more devastating if it is ever put to malicious use. Others will inadvertently come in the future. *SecurityNow*[58] is a weekly podcast centered around

computer security and the topics that surround it. I have been a regular listener since 2012 and noticed a clear trend: as the time goes on, the lack of security of IoT devices, as well as various problems caused by it, from the compromise of privacy, to the massive DDoS attacks is a topic that comes up more and more often. In fact, now it is mentioned almost every week.

TLS is the most used security protocol in the world and it allows two peers to communicate securely. It is designed to run on top of a reliable, connection-oriented protocol, such as TCP. DTLS is the version of TLS that runs on top of an unreliable transport protocol, such as UDP. Most IoT devices have very limited processing power, storage and energy. Moreover, the performance of TCP is known to be inefficient in wireless networks, due to its congestion control algorithm and this situation is worsened with the low-power radios and lossy links found in sensor networks. Therefore, DTLS, which runs on top of UDP, is used more frequently in such devices. The work that will be done in the context of this dissertation, can however, be applied to either one of them, so even though mostly TLS will be mentioned, almost everything also applies to DTLS as well, since it is just an adaption of TLS over unreliable transport protocols, with no changes done the core protocol.

The problem in using (D)TLS in IoT is that it is not lightweight, since it was not designed for such environments. An IoT device may only have 256 KB of RAM and needs to conserve the battery, while sending and receiving a large amount of small information constantly. For example, imagine a temperature sensor that sends the temperature measures every 30 seconds to a server. In this case it just needs to send a few bytes of data and do it with minimal overhead, to conserve RAM and battery. If that sensor is going to use (D)TLS 1.2, it will need two extra roundtrips before it can send any data, which can be an extra hundreds of milliseconds. Besides that, it will need to perform heavy mathematical operations involved in cryptography, using even more battery and taking even more time. There is a clear need for a more lightweight (D)TLS for the IoT.

The goal of this work is to develop a lightweight version of (D)TLS that is fully backwards compatible and does not require any third-party entities, in order to minimize the friction of adoption. The solution will be developed for (D)TLS versions 1.2 and 1.3. The idea is to make it customizable, depending on the security requirements of the context of its use, in that sense, it is similar to a framework.

In the process of my work on this dissertation, I have made several contributions to the TLS 1.3 specification and have been officially recognized as a contributor, my name will be on the final document specifying the TLS 1.3 protocol.

The document is organized as follows: Section 2 describes the background. It begins with introducing some of the concepts that will be used throughout the document, after which it describes the TLS and DTLS protocol versions 1.2 and 1.3, with a focus on the version 1.2 since it is the latest and the most used version of the protocol (version 1.3 is still in draft mode). Section 3 describes all of the

related work done in the area and the current state of the art. Finally, Section 4 provides an architecture of the solution that will be developed in the second part of the dissertation, an explanation of how the results will be evaluated, a general work plan and a conclusion of the work done in this part.

2 Background

2.1 Symmetric vs Asymmetric Cryptography

Asymmetrical Cryptography (AC) more expensive than Symmetrical Cryptography (SC) in terms of performance. This is mainly due to two facts: larger key sizes are required for AC system to achieved the same level of security as in a SC system and CPUs are slower at performing the underlying mathematical operations involved in AC, namely exponentiation requires $O(\log e)$ multiplications for an exponent e . For example, the 2016 NIST report [9] suggests that an AC would need to use a secret key with size of 15360 bits to have equivalent security to a 256-bit secret key for a SC algorithm. This situation is ameliorated by Elliptic Curve Cryptography (ECC), which requires keys of 512 bits, it is still slower than SC, though. The 2017 BSI report [20] (from the German federal office for information security) suggests similar numbers.

Another argument for avoiding as much as possible of the AC functionality is that it requires extra storage space to be used and this might be a problem for some IoT devices, like class 1 devices according to the terminology of constrained-code networks [17] which have about 10KB of RAM and 100KB of persistent memory. I measured the resulting size of the complied *mbedtls* 2.6.0 library [1] when compiled with and without the RSA module (located in the `rsa.c` file), from which I concluded that using that module adds an extra of 32KB.

2.2 Public Certificates and Certificate Chains

A public key certificate, also known as a digital certificate is an electronic document used to prove the ownership of a Public Key (PubK). This allows the other parties to rely upon assertions made by the Private Key (PrivK) that corresponds to the PubK that is certified. In the context of TLS, certificates serve as a guarantee that the communication is done with the claimed entity and not someone impersonating it.

A Certification Authority (CA) is an entity that issues digital certificates. There are two types of CAs: the **root CAs** and the **intermediate CAs**. An intermediate CA is provided with a certificate with signing capabilities signed by one of the root CAs. A **certificate chain** is a list of certificates from the root certificate to the end-user certificate, including any intermediate certificates along the way. In order for a certificate to be trusted by a device, it must be issued by a CA that is included in that device's trusted store.

In (D)TLS, the certificates are in the X.509 format, which is described in RFC 5280[23].

2.3 AEAD Ciphers

Authenticated Encryption (AE) and Authenticated Encryption With Associated Data (AEAD) are forms of encryption which simultaneously provide confidentiality, integrity and authenticity guarantees on the data. An AE cipher takes as input a **key**, a **nonce** and a **plaintext** and outputs the pair (**ciphertext**, **MAC**), if it is encrypting and does the inverse process, while also performing the Message Authentication Code (MAC) check if it is decrypting.

AEAD is nothing more than a variant of AE, which comes with an extra input parameter that is additional data that is **only authenticated, but not encrypted**. Some AEAD ciphers have shorter authentication tags (*i.e.* shorter MACs), which makes them more suitable for low-bandwidth networks, since the messages to be sent are shorter in size.

2.4 Elliptic Curve Cryptography

PubK cryptography is based on the use of one-way math functions, which are function where it is easy to compute the answer given an input, but hard to compute the input given the answer. For example, RSA uses factoring as the one one way function: it is easy to multiply large numbers, but it is hard to factor them.

ECC is based on elliptic curves, which are set of points (x, y) that are solutions to the equation $y^2 = x^3 + ax + b$, where $4a^3 + 27b^2 \neq 0$. Depending on the value of a and b , elliptic curves assume different shapes on the plane.

The security of ECC is based on the the elliptic curve discrete logarithm problem, which states that scalar multiplication is a one way function. To exemplify, given a curve $E(\mathbb{Z}/p\mathbb{Z})$ and points Q and P on that curve $Q, P \in E(\mathbb{Z}/p\mathbb{Z})$ where Q is a multiple of P , the elliptic curve discrete logarithm problem states that finding the integer k , such that $Q = kP$ is a very hard problem.

2.5 The TLS Protocol

TLS is a **client-server** protocol that runs on top a **connection-oriented and reliable transport protocol**, such as **TCP**. Its main goal is to provide **privacy** and **integrity** between the two communicating peers. Privacy implies that a third party will not be able to read the data, while integrity means that a third party will not be able to alter the data.

In the TCP/IP Protocol Stack, TLS is placed between the **Transport** and **Application** layers. it is designed to make the application developer's life easier: all the developer has to do is create a "secure" connection, instead of a "normal" one.

From the top-level view, in a typical connection, there are three basic steps that TLS is responsible for:

1. **Negotiate security parameters** - the communicating peers agree on a set of security parameters to be used in a TLS connection, such as the algorithm used for bulk data encryption, as well as the secret keys.

2. **Authenticate one to another** - usually only the server authenticates to the client.
3. **Communicate securely** - use the negotiated security parameters to encrypt and authenticate the data, communicating securely one with another.

SSL vs TLS: What's The Difference? You will find the names Secure Sockets Layer (SSL) and TLS used interchangeably in the literature, so it is important to distinguish both. TLS is an evolution of the SSL protocol. The protocol changed its name from SSL to TLS when it was standardized by the Internet Engineering Task Force (IETF). SSL was a proprietary protocol owned by Netscape Communications, and The IETF decided that it was a good idea to standardize it, which resulted in [RFC 2246](#) [27], specifying TLS 1.0, which was nothing more than a new version SSL 3.0, very few changes were made.

Security Services TLS provides the following 3 security services:

- **authentication** - both, **peer entity** and **data origin** (or **integrity**) authentication.
 - **peer entity authentication** - we can be sure that we were talking to certain entity, for example, [www.google.com](#). This is achieved through the use of **asymmetrical** or Public Key Cryptography (PKC) (for example, [RSA](#) and [DSA](#)) or **symmetric key cryptography**, using a Pre-Shared Key (PSK).
- **confidentiality** - the data transmitted between the communicating entities (the client and the server) is encrypted. Symmetric cryptography is used for data encryption (for example, [AES](#)).
- **integrity** (also called **data origin authentication**) - we can be sure that the data was not modified or forged, *i.e.*, be sure that the data that we are receiving is coming from the expected entity (for example, we can be sure that the [index.html](#) file sent to us when we connected to [www.google.com](#) in fact came from [www.google.com](#) and that it was not modified (i.e. tampered with) en route by an attacker (**data integrity**). This is achieved through the use of a keyed MAC or an AEAD cipher.

Despite using PKC, TLS does **not** provide **non-repudiation services**: neither **non-repudiation with proof of origin**, which addresses the user denying having sent a message, nor **non-repudiation with proof of delivery**, which addresses the user denying the receipt of a message. This is due to the fact, that instead of using **digital signatures**, either a keyed MAC or an AEAD cipher is used, both of which require a **shared secret** to be used.

All 3 security services are not required to be used in every situation. In this sense, TLS is like a framework that allows to select which security services should be used for a communication session. As an example, certificate validation might be skipped, which means that the **authentication** guarantee is not provided. There are some differences regarding this claim between TLS 1.2 and TLS 1.3, for example, while in the first you have a [null](#) cipher (no authentication, no confidentiality, no integrity), in the latter this is not true, since it deprecated all non-AEAD ciphers in favor of AEAD ones.

Cipher Spec vs Cipher Suite The meaning of these terms differs in TLS 1.2 and TLS 1.3. For TLS 1.2, **cipher spec** defines the message encryption algorithm and the message authentication algorithm, while the **cipher suite** is the **cipher spec**, alongside the definition of the **key exchange** algorithm and the Pseudo-Random Function (PRF) (used in key generation). In TLS 1.3, the **cipher spec** has been removed altogether, since the **ChangeCipherSpec** protocol has been removed. The concept of **cipher suite** has been updated to define the pair of AEAD algorithm and hash function to be used with HMAC-based Extract-and-Expand Key Derivation Function (HKDF): in TLS 1.3 the **key exchange** algorithm is negotiated via extensions.

TLS (Sub)Protocols In reality TLS is composed of several protocols(illustrated in 2), a brief description of each one of which follows:

- **TLS Record Protocol** - the lowest layer in TLS. it is the layer that runs directly on top of **TCP/IP** and it serves as an **encapsulation for the remaining sub-protocols** (4 in case of TLS 1.2 and 3 in case of TLS 1.3). To the **Record Protocol**, the remaining sub-protocols are what **TCP/IP** is to **HTTP**. A TLS Record is comprised of 4 fields, with the first 3 comprising the TLS Record header: a 1-byte record **type**, specifying the type of record that is encapsulated (ex: value **0x16** for the handshake protocol), a 2-byte **TLS version** field, a 2-byte **length** field (which means that a maximum TLS Record size is of **16384** bytes), specifying the length of the data in the record, excluding the header itself and a **fragment** field whose size in bytes is specified by the **length** field, which contains data that is transparent to the Record layer and should be dealt by a higher-level protocol, specified by the **type** field. This is illustrated in figure 1.
- **TLS Handshake Protocol** - the core protocol of TLS. Allows the communicating peers to **authenticate** one to another and negotiate a **cipher suite** (**cipher suite** and key exchange algorithm in case of TLS 1.3) which will be used to provide the security services. For TLS 1.2, **compression** method is also negotiated here.
- **TLS Alert Protocol** - allows the communicating peers to signal potential problems.
- **TLS Application Data Protocol** - used to transmit data securely.
- **TLS Change Cipher Spec Protocol** (removed in TLS 1.3) - used to activate the initial **cipher spec** or change it during the connection.

TLS Connections and Sessions it is important to distinguish between a **TLS session** and a **TLS connection**.

- **TLS session** - association between two communicationg peers that is created by the **TLS Handshake Protocol**, wich defines a set of negotiated paramters (cyrptographic and others, depending on the TLS version, such as the compression algorithm) that are used by the **TLS connections associated with that session**. A single **TLS session** can be shared among



Fig. 1. TLS Record header



Fig. 2. TLS (Sub)protocols and Layers

multiple **TLS connections** and its main purpose is to avoid the expensive negotiation of new parameters for each **TLS connection**. For example, let us say that an Hypertext Markup Language (HTML) page is being downloaded over Hypertext Transfer Protocol Secure (HTTPS) and that page references some images from that same server, using HTTPS links. Instead of the web browser negotiating a new TLS session again, it can re-use the one it has established to download the HTML page in the first place, saving time and computational resources. Session resumption can be done using various approaches, such as **session identifiers**, described throughout [Section 7.4 of RFC 5246](#) [26], **session tickets**, defined in [RFC 5077](#) [51].

- **TLS connection** - used to actually transmit the cryptographically protected data. For the data to be cryptographically protected, some parameters, such as the **secret keys** used to encrypt and authenticate the transmitted data need to be established; this is done when a **TLS session** is created, during the **TLS Handshake Protocol**.

TLS Record Processing A TLS record must go through some processing before it can be sent over the network. This processing involves the following steps (4 for TLS 1.2 and 3 for TLS 1.3):

1. **Fragmentation** - the **TLS Record Layer** takes arbitrary-length data and **fragments** it into manageable pieces: each one of the resulting fragments is called a **TLS Plaintext**. Client message boundaries are not preserved, which means that multiple messages of the same type may be placed into the same fragment or a single message may be fragmented across several records.
2. **Compression** (removed in TLS 1.3) - the **TLS Record Layer** compresses the **TLSPlaintext** structure according to the negotiated compression method, outputting **TLSCompressed**. Compression is optional. If the negotiated compression method is **null**, **TLSCompressed** is the same as **TLSPlaintext**.
3. **Cryptographic Protection** - in case of TLS 1.2, either an AEAD cipher or a separate encryption and MAC functions transform a **TLSCompressed** fragment into a **TLSCipherText** fragment. In case of TLS 1.3, the **TLSPlaintext** fragment is transformed into a **TLSCipherText** by applying an AEAD cipher.
4. Append the **TLS Record Header** - encapsulate **TLSCipherText** in a **TLS Record**.

Fig. 3. TLS Record Processing

The process described above, as well as the structure names are depicted in figure 3. Step 2 is not present in TLS 1.3. The structure names are exactly as they appear in the TLS specifications.

TLS Keying Material Secret keys are at the base of most cryptographic operations. In order for both communicating peers to be able to encrypt and decrypt data using symmetric cryptographic algorithms, they need to **share** the same key somehow. In TLS, both, the client and a server derive the **same set of keys** independently, through the exchanged messages in the TLS Handshake Protocol.

When communicating with one another, the client uses one key to encrypt the data to be sent to the server and another different key to decrypt the data that it receives from the server. This means that in order to deal with data encryption and decryption, both of the communicating entities have two keys: one to encrypt the outgoing data and one to decrypt the incoming data. Those keys have different names in TLS 1.2 and TLS 1.3, but they serve the same basic purpose. In this general description, they will be referred to as **client_write_key** (used by the client to encrypt the data to be sent), **client_read_key** (used by the client to decrypt the incoming data from the server), **server_write_key** (used by the server to encrypt the data to be sent) and **server_read_key** (used by the server to decrypt the incoming data from the client). Note, that the fol-

lowing relationships must hold: `client_write_key == server_write_key` and `client_read_key == server_write_key`.

Besides the secret keys mentioned previously, in TLS 1.2 you might also have other ones, depending on the cipher suite in use, namely the `client/server_write_IV` that is only generated for implicit nonce techniques used with AEAD ciphers and the `client/server_write_MAC_key`, which is the input secret to the MAC function; this key is not present when AEAD ciphers are in use.

TLS 1.2 Keying Material Generation The generation of secret keys, used for various cryptographic operations involves the following steps (in order):

- Generate the **premaster secret**.
- From the **premaster secret** generate the **master secret**.
- From the **master secret** generate the various secret keys, which will be used in the cryptographic operations.

In TLS 1.2, the TLS PRF is used to generate the keying material needed for a connection, which is defined as `PRF(secret, label, seed) = P_hash(secret, label + seed)`. The `P_hash(secret, seed)` function is an auxiliary data expansion function which uses a single cryptographic hash function to expand a `secret` and a `seed` into an arbitrary quantity of output, meaning that you can use it to generate anywhere from 1 to an infinite number of bits of output. The `PRF(secret, label, seed)` is used to generate as many bits of output as you need. When generating the master secret, the `secret` input is the **premaster secret**. When generating the key block, from which you will actually obtain final keys the `secret` input is the **master secret**.

The cryptographic hash function used in `P_hash(secret, label, seed)` is a hash function implicitly defined by the cipher suite in use. All of the cipher suites defined in the TLS 1.2 base spec use **SHA-256** and any new cipher suites must explicitly specify a the same hash function or a stronger one.

TLS 1.3 Keying Material TLS 1.3's keying material generation is a little more complex, since different keys are used to encrypt data throughout the Handshake Protocol. This can be explained by the fact that in TLS 1.3 the encryption begins earlier, with Handshake messages besides the **Finished** being encrypted, as well as features such as **early client data**, also known as **0-RTT data**, where data comes encrypted in the first flight. As a result of those properties, you have multiple encryption keys generated and used to encrypt different data throughout the handshake.

The way the keying material is derived is also different, since the PRF construction described above has been replaced. The new design allows easier analysis by cryptographers due to the improved key separation properties. In TLS 1.3, key derivation uses the HKDF function defined in **RFC 5869**[37] and its two components, the **HKDF-Extract** and **HKDF-Expand**.

TLS 1.2 Key Exchange Methods The way the **premaster secret** is generated depends on the key exchange method used. In fact, this is the only phase of the keying material generation phase that is variable for a fixed cipher suite (because a cipher suite defines the PRF function to be used), the rest remains exactly the same. The derivation of the **master secret** from the **premaster secret**, as well as the derivation of the bulk encryption keys, MAC keys and Initialization Vector (IV)s from the **master secret** that follows **is not impacted by the key exchange method** in use.

You have quite a few choices when it comes to key exchange methods. Some of them are defined in the base spec ([RFC5246](#) [26]), while others in separate [RFCs](#) (such as the ECC based key exchange, specified in [RFC4492](#) [13]).

The base spec specifies 4 key exchange methods, one using Rivest-Shamir-Adleman (RSA) and 3 using Diffie-Hellman (DH):

- static RSA ([RSA](#)) [removed in TLS 1.3] - the client generates the premaster secret (PMS), encrypts it with the server's PubK (which it obtained from the server's [X.509](#) certificate), sending it to the server, which decrypts it using the corresponding PrivK. This key exchange method offers authenticity, but does not offer Perfect Forward Secrecy (PFS).
- anonymous DH ([DH_anon](#)) [removed in TLS 1.3] - a DH key exchange is performed and an **ephemeral** key is generated, but the exchanged DH parameters are **not authenticated**, making the resulting key exchange vulnerable to Man In The Middle (MITM) attacks. TLS 1.2 spec states that cipher suites using [DH_anon](#) **must not** be used, unless the application layer explicitly requests so. This key exchange offers PFS, but no authenticity.
- fixed/static DH ([DH](#)) [removed in TLS 1.3] - the server's/client's public DH parameter is embedded in its certificate. This key exchange method offers authenticity, but does not offer PFS.
- ephemeral DH ([DHE](#)) - each run of the protocol, uses different public DH parameters, which are generated dynamically. This results in a different, ephemeral key being generated every time. The public parameters are then digitally signed in some way, usually using the sender's private RSA ([DHE_RSA](#)) or `\gls{dsa}` [DHE_DSS](#) key. This key exchange offers both authenticity and PFS.


When either of the DH variants is used, the value resulting from the exchange is used as the PMS (without the leading 0's). Usually, only the server's authenticity is desired, but client's can also be achieved if it provides the server its certificate. Whenever the server is authenticated, the server is secure against MITM attacks. Table 1 summarizes the security properties offered by each key exchange method.

Note that in TLS 1.3, all of static RSA and DH cipher suites have been removed: all of the PubK exchange methods now provide PFS. Even though, anonymous DH has also been removed from TLS 1.3, you can still have unauthenticated connections by either using **raw public keys** [61] or by not verifying the certificate chain and any of its contents.

Table 1. Key exchange methods and security properties

| Key Exch Meth | Authentication | PFS |
|---------------|----------------|-----|
| RSA | X | |
| DH_anon | | X |
| DH | X | |
| DHE | X | X |

The ECC-based key exchange (Elliptic Curve Diffie-Hellman (ECDH) and Elliptic Curve Diffie-Hellman Ephemeral (ECDHE)) and authentication (Elliptic Curve Digital Signature Algorithm (ECDSA)) algorithms are defined in [RFC4292](#) [33], which is also referenced in [RFC5246](#) [25]. The document introduces five new ECC-based key exchange algorithms, all of which use ECC to compute the **premaster secret**, differing only in whether the negotiated keys are ephemeral (ECDH) or long-term (ECDHE), as well as the mechanism (if any) used to authenticate them. Three new ECDSA **client authentication** mechanisms are also defined, differing in the algorithms that the certificate must be signed with, as well as the key exchange algorithms that they can be used with. Those features are negotiated through the TLS Extension Mechanism.

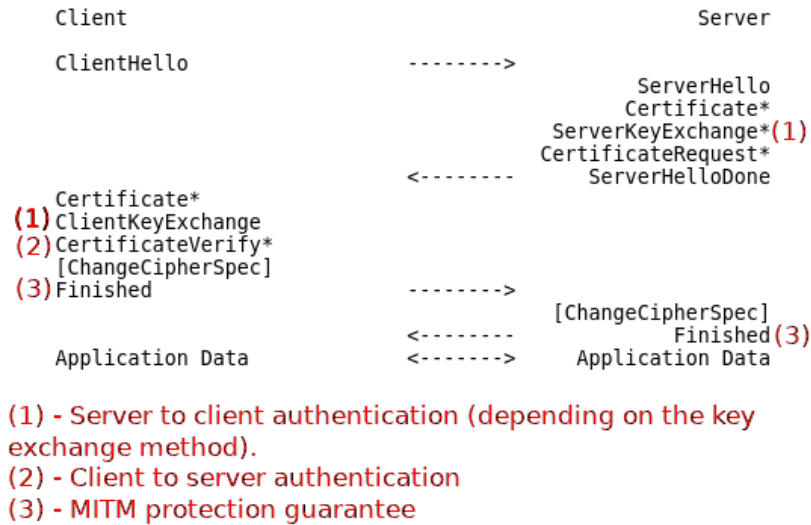**Fig. 4.** TLS 1.2 message flow for a full handshake

TLS 1.2 Handshake Protocol In this phase the client and the server agree on which version of the TLS protocol to use, authenticate one to another and negotiate items like the cipher suites and the compression method to use. Figure

4 shows the message flow for the full TLS 1.2 handshake. Note that * indicates situation-dependent messages that are not always sent, while `ChangeCipherSpec` is a separate protocol, rather than a message type.

As already mentioned before, every TLS Handshake message is encapsulated within a TLS Record. The actual Handshake message is contained within the `fragment` of the TLS Record. The Record type for a Handshake message is `0x16`. The Handshake message has the following structure: a 1-byte `msg_type` field (specifies the Handshake message type), a 2-byte `length` field (specifies the length of the `body`) and a `body` field, which contains a structure depending on the `msg_type` (similar to `fragment` field in a TLS Record).

Now, a typical handshake message flow will be described, with only the most important fields of each message mentioned.

The connections begins with the client sending a `ClientHello`, containing `.random`, `cipher_suites` and `compression_methods`, among other fields. `cipher_suites` contains a **list** of cipher suites and `compression_methods` contains a list of compression methods (`compression_methods`) that the client supports, ordered by preference, with the most preferred one appearing first. The TLS Record contains a 2-byte `version` field which indicates the highest version supported by the client.

The server responds to the `ClientHello` with a `ServerHello` message, which is similar in its contents, except that instead of containing a list of supported features, it contains a single item containing the one that it chose, *i.e.*, the server responds with the chosen `cipher_suite` and `compression_method` (note the **singular** form) that it chose from the corresponding list sent by the client. Just like in the client's case, a `random` is also present. The `version` field in the TLS Record indicates the TLS version chosen by the server and it is the one that is gonna be used for that connection.

TLS requires cryptographically secure pseudorandom values to be generated by both of the parties independently. Those random number (or nonces) are essential for freshness (protection against replay attacks; we do need both randoms, otherwise the messages could be replayed) and session uniqueness, since both of the random values are inputs to the **master secret** generation, meaning that a new keying material is generated with every session. If the output of the pseudorandom numbers can be predicted by the attacker, he can predict the keying material, as described in "A Systematic Analysis of the Juniper Dual EC Incident" [22]. The 32-byte random value is composed by concatenating the 4-byte GMT UNIX time with 28 cryptographically random bytes. Note that in TLS 1.3 the random number structure has the same length, but is generated in a different manner: the client's 32 bytes are all random, while the server's last 8 bytes are fixed when negotiating TLS 1.2 or 1.3.

Next, the server sends a `Certificate` message, which contains a list of PubK certificates (a certificate chain): the server's certificate, every intermediate certificate and the root certificate. The certificate's contents will depend on the negotiated cipher suite and extensions. The same message type occurs later in the handshake if the server asks the client for certificate with the `CertificateRequest`

message. Note, that in a typical scenario, the server will seldom request client authentication.

The `ServerKeyExchange` message follows, containing additional information needed by the client to compute the `premaster secret`. This message is only sent in some key exchange methods, namely `DHE_DSS`, `DHE_RSA` and `DH_anon`. For non-anonymous key exchanges, this is the message that authenticates the server to the client, since the server sends a digital signature over the client and server randoms and the server's key exchange parameters. Note that this is not the only place where the server can authenticate itself to the client. For example, if `RSA` key exchange is used, the server authentication is done indirectly when the client sends the premaster secret encrypted with the public RSA key provided in the server certificate: only the server knows the corresponding private key, so if both of the sides generate the same keying material, then the server must be who he claims to. In TLS 1.3 this message is non-existent and a similar functionality is taken by the `key_exchange` extension.

The `ServerHelloDone` is sent to indicate the end of `ServerHello` and associated messages. Upon the receipt of this message, the client should check that the server provided a valid certificate. This message is not present in TLS 1.3.

With the `ClientKeyExchange` message the `premaster secret` is set, either by direct transmission of the secret generated by the client and encrypted with the server's public RSA key (thus, authenticating the server to the client) or by the transmission of DH parameters that will allow each side to generate the same `premaster secret` independently.

The `CertificateVerify` message is sent by the client to verify its certificate, if it has signing capability (*i.e.* all certificates except for the ones containing fixed DH parameters).

The `ChangeCipherSpec` is its own protocol, rather than a type of handshake message. It is sent by both parties to notify the receiver that subsequent records will be protected under the newly negotiated `CipherSpec` and keys.

The `Finished` message is an essential part of the protocol. It is the first message protected with the newly negotiated algorithms, keys and secrets. Only after both parties have sent and verified the contents of this message is when they can be sure that the Handshake has not been tampered with by a MITM and begin to receive and send application data. Essentially, this message contains a keyed hash with the master secret over the hash of all the data from all of the handshake messages not including any `HelloRequest` messages and up to, but not including, this message. The other party must perform the same computation on its side and make sure that the result is identical to the contents of the other party's `Finished` message. If at some point a MITM has tampered with the handshake, the result will be a mismatch in computed and received contents of the `Finished` message.

At any time after a session has been negotiated, the server may send a `HelloRequest` message, to which the client should respond with a `ClientHello`, thus beginning the negotiation process anew.

At an point in the handshake, the Alert protocol may be used by any of the peers to signal any problems or even abort the process by using an appropriate message type.

Besides the full handshake, the TLS 1.2 specification also specifies an abbreviated handshake mechanism, which can be used to either resume a previous session or duplicate one, instead of negotiating new security parameters (for example, this is useful in the context of multiple [HTTPS](#) requests for various resources, when loading a typical website). The advantage of this mechanism is that the handshake is reduced to [1 RTT](#), instead of the usual [2 RTT](#) as it is the case in the full handshake. In order to do the abbreviated handshake, the client and the server must have established a session previously, by performing the full handshake. To do this, the client sends a session ID of the session it wants to resume in its [ClientHello](#) and it's up to the server to decide if he wants to resume that session, by responding with a [ServerHello](#) containing that same session ID value, or if it wants to establish a new session by sending a session ID with a different value. The keying material, such as the bulk data symmetric encryption keys and the MAC keys are formed by hashing the new client and server random values with the master secret, which means that provided that the master secret has not been compromised and that the secure hash operations are secure, the new connection will be secure and independent from previous connections. The TLS 1.2 spec, suggests an upper limit of 24 hours for session ID lifetimes, since an attacker who obtains the master secret will be able to impersonate the compromised party until the corresponding session ID is retired. Note that this mechanism requires state to be maintained in both peers.

TLS Extensions TLS extensions were originally defined in [RFC 4366](#)[14] and later merged into the TLS 1.2 base spec. Each extension consists of an extension type, which identifies the particular extension type and extension data, which contains information specific to a particular extension.

The extension mechanism may be used by TLS clients and servers; it is backwards compatible, which means that the communication is possible between TLS a client that supports a particular extension and a server that does not support it, and vice versa. A client may request the use of extensions by sending an extended [ClientHello](#) message, which is just a "normal" [ClientHello](#) with an additional block of data that contains a list of extensions. The backwards compatibility is achieved based on the TLS requirement that the servers are not "extensions-aware" ignore the data added to the [ClientHello](#)s that they do not understand (section [7.4.1.2](#) of [RFC 2246](#)[27]), meaning that even older servers that do not support extensions, namely the ones with version of TLS prior to 1.2 will not "break".

The presence of extensions can be determined by checking if there are bytes following the [compression_methods](#) field in the [ClientHello](#). If the server understands an extension, it sends back an extended [ServerHello](#), instead of a regular one. An extended [ServerHello](#) is a "normal" [ServerHello](#) with an ad-

ditional block of data following the `compression_method` field that contains a list of extensions.

An extended `ServerHello` message can only be sent in a response to an extended `ClientHello` message. This prevents the possibility that an extended `ServerHello` message could "break" older TLS clients that do not support extensions. An extension type must not appear in the extended `ServerHello`, unless the same extension type appeared in the corresponding extended `ClientHello`, and if this happens, the clients must abort the handshake.

TLS 1.3 Due to limited space, TLS 1.3 will not be described in detail. The focus was on TLS 1.2 instead, because TLS 1.3 is still in draft mode and 1.2 is the latest and the recommended to use version.

Despite the protocol name not suggesting it TLS 1.3 is very different from TLS 1.2, in fact, it should have probably been called TLS 2.0 instead. I have studied TLS 1.3 in great detail, and as it was already mentioned, I have been formally recognized as a TLS 1.3 contributor 1.3. I have also participated in the mailing lists, as part of my work on the architecture of the solution.

Numerous differences of TLS 1.3 from 1.2 have been mentioned throughout the document. Various changes in TLS 1.3 make it more suitable in the context of IoT. Some of them have already mentioned previously, and in this section a couple more will be outlined.

The first important difference is that in TLS 1.3 extensions are required, since some of the functionality has been moved into extensions, in order to preserve backwards-compatibility with the previous versions of the `ClientHello`s. In fact, the way a server distinguishes if a client is requesting a TLS 1.3 is by checking the presence of the `supported_versions` extension in the extended `ClientHello`.

In TLS 1.3 more data is encrypted and the encryption starts earlier. For example, on the server-side you have a notion of "encrypted extensions". The `EncryptedExtensions` message, as the name suggests, contains a list of extensions that are encrypted under a symmetric key and it contains any extensions that are not needed to establish the cryptographic context.

In TLS 1.3, non AEAD ciphersuites are not supported anymore. Static RSA and DH ciphersuites have been removed, meaning that all public key exchange mechanisms now provide PFS. Even though anonymous DH key exchange has been removed, you can still have unauthenticated connections by either using raw public keys or not verifying the certificate and any of its contents.

One of the main problems with using TLS in IoT is that while IoT traffic need to be quick and lightweight, TLS 1.2 adds two additional round trips (2 RTT) to the start of every session. TLS 1.3 handshake has less latency, when compared to TLS 1.2 and this is extremely important in the context of IoT. The full TLS 1.3 handshake is only 1 RTT. TLS 1.3 even allows clients to send data on the first flight (known as "early data"), when the clients and servers share a PSK (either obtained externally or via a previous handshake). This means that in TLS 1.3 you can have 0-RTT data, by essentially encrypting it with the previously shared PSK. Session resumption via identifiers and tickets has been

obsoleted in TLS 1.3, and both methods have been replaced by a PSK mode. The PSK is established on a previous connection after the handshake is completed and can be presented by the client on the next visit.

2.6 DTLS

The design of DTLS is intentionally very similar to TLS, in fact, its specification is written in terms of differences from TLS. The changes are mostly done on the lower level, and even extensions that have been defined before DTLS has even existed can be used with DTLS. The latest version of DTLS is 1.2 and it is defined in [RFC 6347](#)[46]. There is a draft of DTLS 1.3 [49] that is currently under active development.

Since DTLS operates on top of an unreliable transport protocol, such as UDP, it must explicitly deal with the absence of reliable and ordered assumptions that are made by TLS. The main differences from DTLS 1.2 to TLS 1.2 are:

- two new values are added to the record layer: an explicit **2 byte** sequence number and a **6 byte** epoch fields. The DTLS MAC is the same as of TLS, however, rather than using the implicit sequence number, the **8 byte** value formed by concatenation of the epoch number and the sequence number is used.
- stream ciphers must not be used with DTLS.
- a stateless cookie exchange mechanism has been added to the handshake protocol in order to prevent Denial-of-Service (DoS) attacks. To accomplish this, a new handshake message, the **HelloVerifyRequest** has been added. After the **ClientHello**, the server responds with a **HelloVerifyRequest** containing a cookie, which is returned back to the server in another **ClientHello** that follows it, after which the handshake proceeds as in TLS. Although optional for the server, this mechanism highly recommended, and the client must be prepared to respond to it.
- the handshake message format has been extended to deal with message re-ordering, fragmentation and loss by addition of three new fields: a message sequence field, a fragment offset field and a fragment length field.

3 Related Work

Lightweight cryptography is an important topic in the context of IoT, since cryptography a fundamental part of security and it is fundamental for it to be lightweight in order to run on devices with limited memory and processing capabilities. A lot of work in IoT incorporates it in one way or another, so this section will begin with the description of the work done in this area.

Alex *et al*[12] explore the topic of lightweight symmetric cryptography, providing a summary of the lightweight symmetric primitives from the academic community, the government agencies and even proprietary algorithms which have been either reverse-engineered or leaked. All of those algorithms are listed

in the paper, alongside relevant metrics. The list will not be included here due to lack of space. The authors also proposed to split the field into two areas: ultra-lightweight and IoT cryptography.

The authors systematized the knowledge in the area of lightweight cryptography in order to define "lightweightness" more precisely. They observed that the design of lightweight cryptography algorithms vary greatly, the only unifying thread between them being the low computing power of the devices they are designed to run on.

The most frequently optimized metrics are the memory consumption, the implementation size and the speed or the throughput of the primitive. The specifics depend on whether the hardware or the software implementations of the primitives are considered.

If the primitive is implemented in hardware, the memory consumption and the implementation size are lumped together into its gate area, which is measured in Gate Equivalents (GE), a metric quantifying how physically large a circuit implementing primitive is. The throughput is measured in bytes/sec and it corresponds to the amount of plaintext processed per time unit. If a primitive is implemented in software (typically for use in micro-controllers), the relevant metrics are the RAM consumption, the code size and the throughput of the primitive, measured in bytes per CPU cycle.

To accommodate the limitations of constrained devices, most lightweight algorithms are designed to use smaller internal states with smaller key sizes. After analysis, the authors concluded that even though at least **128 bit** block and key sizes were required from the AES candidates, most of the lightweight block ciphers use only **64-bit** blocks, which leads to a smaller memory footprint in both, software and hardware, while also making the algorithm better suited for processing smaller messages.

Even though algorithms can be optimized in implementation: whether it is a software or a hardware, dedicated lightweight algorithms are still needed. This comes down mainly to two factors: there are limitations to the extent of the optimizations that you can make and the hardware-accelerated encryption is frequently vulnerable to various Side-Channel Attack (SCA)s (such as the attack done on the Phillips light bulbs [50], where the authors were able to recover a secret key used to authenticate updates, via an SCA).

It is more difficult to implement a lightweight hash function than a lightweight block cipher, since standard hash functions need large amounts of memory to store both: their internal states, for example, **1600 bits** in case of SHA-3 and the block they are operating on, for example, **512 bits** in the case of SHA-2. The required internal state is acceptable for a desktop computer, but not for a constrained device. Taking this into consideration, the most common approach taken by the designers is to use a sponge construction with a very small bitrate. A sponge function is an algorithm with an internal state that takes as an input a bit stream of any length and outputs a bit stream of any desired length. Sponge functions are used to implement many cryptographic primitives, such as cryptographic hashes. The bitrate decides how fast the plain text is processed

and how fast the final digest is produced. A small bitrate means that the output will take longer to be produced, which means that a smaller capacity (the security level) can be used, which minimizes the memory footprint at the cost of slower data processing. A capacity of **128 bits** and a bitrate of **8 bits** are common values for lightweight hash functions.

Another trend in the lightweight algorithms noticed by the authors is the preference for ARX-based and bitsliced-S-Box based designs, as well as simple key schedules.

Finally, a separation of the "lightweight algorithms" definition into two distinct fields has been proposed:

- **Ultra-Lightweight Crypto** - algorithms running on very cheap devices which are **not connected to the internet**, which are easily replaceable and have a limited life-time. Examples: RFID tags, smart cards and remote car keys.
- **IoT Crypto** - algorithms running on a low-power device, **connected to a global network**, such as the internet. Examples: security cameras, smart light bulbs and smart watches.

Considering the two definitions above, this work focuses on **IoT Crypto** devices. A summary of differences between the both categories is summarized in table 2.

Table 2. A summary of the differences between ultra-lightweight and IoT crypto

| | Ultra-Lightweight | IoT |
|--------------------------|-------------------------------------|--|
| Block Size | 64 bits | 128 bits |
| Security Level | 80 bits | 128 bits |
| Relevant Attacks | low data/time complexity | same as "regular" crypto |
| Intended Platform | dedicated circuit (ASIC, RFID...) | micro-controllers, low-end CPUs |
| SCA Resilience | important | important |
| Functionality | one per device, e.g. authentication | encryption, authentication, hashing... |
| Connection | temporary, only to a given hub | permanent, to a global network |

While there is a high demand lightweight PubK primitives, the required resources for them are much higher than for symmetric key ones. As the *Lightweight Cryptography for the Internet of Things*[35] paper by *Sony Corporation* concluded, there are no promising primitives that have enough lightweight and security properties, comparing to the conventional ones, such as RSA and ECC. Further research on this topic lead to the same conclusion.

Lightweight cryptography is an important part of my work and there are papers detailing various algorithms. While an important topic for the final solution, it was covered in sufficient detail, by purposefully describing recent works that provide an overview of the different areas, rather than focusing on specific implementations, since the length of this section is limited. The remaining text

in this section will be used to describe work done on the (D)TLS protocol in the context of IoT.

For the reasons above, the main key exchange mechanism used in IoT are PSKs. S3K[43] proposes a key management architecture for resource-constrained devices, which allows devices that have no previous, direct security relation to use (D)TLS using one of two approaches: shared symmetric keys or raw public keys. The resource-constrained device is a server that offers one or more resources, such as temperature readings. The idea in both approaches is to introduce a third-party **trust anchor (TA)** that both, the client and the server use to establish trust relationships between them.

The first approach is similar to Kerberos[41], without requiring any changes to the original protocol. A client can request a PSK **Kc** from the TA, which will generate it and send it back to the client via a secure channel, alongside a **psk_identity** which has the same meaning and is used in the same way as defined in RFC 4279[30]. When connecting to the server, the client will then send the **psk_identity** that it received in the (D)TLS handshake and the server will derive the **Kc**, using the **P_hash()** function defined in [26].

The second approach consists in the requesting an APK (the authors never defined what this acronym stands for, but my assumption is that they mean "Authorization Public Key") from the TA. In his request, the client includes his Raw Public Key (RPK), which is used for authorization. The TA creates an authorization certificate, protects it with a MAC and sends it to the client alongside the server's PubK. The client then sends this APK (instead of the RPK) when connecting to the server, which verifies the APK (to authorize the client) and proceeds with the handshake in the RPK mode, as defined in [30]. To achieve this, a new certificate structure is defined, alongside a new **certificate_type**. The new certificate structure is just the RFC7250 [61] structure, with an additional MAC.

The has function used for key derivation is SHA256. The authors evaluated the performance of their solution with and without SHA2 hardware acceleration and concluded that while it had significant impact on key derivation, it had little impact on the total handshake time (**711.11 ms** instead of **775.05 ms**), since most of the time was spent in sending data over the network and other parts of the handshake, the longest one being the **ChangeCipherSpec** message which required the longest processing time of **17.79ms**.

6LoWPAN[39] is a protocol that allows devices with limited processing ability and power to transmit information wirelessly using the **IPv6** protocol. The protocol defines IP Header Compression (IPHC) for the IP header and Next Header Compression (NHC) for the IP extension headers and the UDP header in [34]. The compression relies on the shared context between the communicating peers.

[45] uses this same idea, but with the goal of compressing DTLS headers. 6LoWPAN does not provide ways to compress the UDP payload and layers above, there is however, a proposed standard[16] for generic header compression for 6LoWPANs that can be used to compress the UDP payload. The authors propose a way to compress DTLS headers and messages using this mechanism.

The paper [45] defines how the DTLS Record header, the DTLS Handshake header, the ClientHello and the ServerHello messages can be compressed, but notes that the same compression techniques can be used to compress the remaining Handshake messages. They explore two cases for the header compression: compressing both, the Record header and the Handshake header and compressing the Record header only, which is useful after the handshake has completed and the fragment field of the Record layer contains application data, instead of a handshake message.




Fig. 5. IPv6 Next Header Compression

Fig. 6. LOWPAN_NHC_RHS structure

All of the cases follow the same basic idea, for this reason only one of them will be exemplified. Each DTLS fragment is carried over in the UDP payload. In this case, the UDP payload carries a header-like payload (the DTLS record header). Figure 5 shows the way IPv6 next header compression is done. The authors use the same value for the **LOWPAN_NHC Encoding** field (defined in [34]) as in **RFC7400** and define the format of the **In-line Next Header Fields** (defined in [34]), which is the compressed DTLS content. The **LOWPAN_IPHC Encoding** and **In-Line IP Fields** fields are used in the IPv6 header compression and are not in the scope of the paper.

The case where both, the Record and the Handshake headers are compressed will be exemplified. In this case **LOWPAN_NHC Encoding** will contain the **LOWPAN_NHC_RHS** structure (depicted in figure 6), which is the compressed form of the Record and Handshake headers. The parts that are not compressed will be contained in the **Payload** part. The first four bits represent the ID field and in this case they are fixed to **1000**, so that the decompressor knows what is being compressed (*i.e.* how to interpret the structure that follows the ID bits). If the **F** field of the **LOWPAN_NHC_RHS** structure contains the bit **0**, it means that the handshake message is not fragmented, so the **fragment_offset** and **fragment_length** fields are elided from the Handshake header (common case when a handshake message is not bigger than the maximum header size), meaning that they are not going to be sent at all (*i.e.* they are not going to be present in the **Payload** part). If the **F** bit has the value **1**, the **fragment_offset** and **fragment_length** fields are carried inline (*i.e.* they are present in the **Payload** part). The remaining two fields define similar behavior for other header fields (some of them assume that some default value is present, when a field is elided). The **length** field in the Record and Handshake headers are always elided, since they can be inferred from the lower layers.

The evaluation showed that the compression can save a significant number of bits: the Record header, that is included in all messages can be compressed by **64 bits** (*i.e.* by **62\%**).

There is also a proposal for TCP header compression for 6LoWPAN[7], which if adopted, in many cases can compress the mandatory **20 bytes** TCP header into **6 bytes**. This means that the same ideas can be applied to TCP and TLS as well.

Later, in 2013, Raza *et al.* proposed a security scheme called Lithe[44], which is a lightweight security solution for Constrained Application Protocol (CoAP) that uses the same DTLS header compression technique as in [45] with the goal of implementing it as a security support for CoAP. CoAP[18] is a specialized RESTful Internet Application Protocol for constrained devices. it is designed to easily translate to HTTP, in order to simplify its integration with the web, while also meeting requirements such as multicast support and low overhead. CoAP is like "HTTP for constrained devices". CoAP can run on most devices that support UDP or a UDP-like protocol. CoAP mandates the use of DTLS as the underlying security protocol for authenticated and confidential communication. There is also a specification CoAP running on top of TCP, which uses TLS as its underlying security protocol currently being proposed [19], with active work being done in this area.

The authors evaluated their system in a simulated environment in Contiki OS and they obtained significant gains in terms of packet size (similar numbers to the ones observed in [45]), energy consumption (in average **15\%** less energy is used to transmitting and receive compressed packets), processing time (the compression and decompression time of DTLS headers is almost negligible) and network-wide response times (up to **50\%** smaller RTT). The gains in the mentioned measures are the largest when the compression avoids fragmentation (in the paper, for payload size of **48 bytes**).

Angelo *et al* [21] proposed to integrate the DTLS protocol inside the CoAP, while also exploiting ECC optimizations and minimizing ROM occupancy. They have implemented their solution on an off-the-shelf mote platform and evaluated its performance. DTLS was designed to protect web application communication, as a result, it has a big overhead in IoT scenarios. Besides that, it runs over UDP, so additional mechanisms are needed to provide the reliability and ordering guarantee. With this in mind, the authors wanted to design a version of DTLS that is both: minimizes the code size and the number of exchanged messages, resulting in an optimized Handshake protocol.

In order to minimize the code size occupied by the DTLS implementation, they decided to delegate the tasks of **reliability** and **fragmentation** to CoAP. This means that the code responsible for those functionalities, can be removed altogether from the DTLS implementation, thus reducing ROM occupancy. This part of their work was based on an informational RFC draft[36], in which the authors profiled DTLS for CoAP-based IoT applications and proposed the use of a RESTful DTLS Handshake which relies on CoAP block-wise transfer to address the fragmentation issue.

To achieve this they proposed the use of a RESTful DTLS connection as a CoAP resource, which is created when a new secure session is requested. The authors exploit the CoAPs capability to provide connection-oriented communication offered by its message layer. In particular, each [Confirmable](#) CoAP message requires an [Acknowledgement](#) message (page 8 of [56]), which acknowledges that a specific [Confirmable](#) message has arrived, thus providing reliable retransmission.

Instead of leaving the fragmentation function to DTLS, it was delegated to the block-wise transfer feature of CoAP[18], which was developed to support transmission of large payloads. This approach has two advantages: first, the code in the DTLS layer responsible for this function can be removed, thus reducing ROM occupancy and second, the fragmentation/reassembly process burdens the lower Layers with state that is better managed in the application layer.

The authors also optimized the implementation of basic operations on which many security protocols, such as ECDH and ECDSA rely upon. The first optimization had to do with modular arithmetic on large integers. A set of optimized assembly routines based on [31] allow the improved use of registers, reducing the number of memory operations needed to perform operations such as multiplications and square roots on devices with [8-bit](#) registers.

Scalar multiplication is often the most expensive operation in Elliptic Curve (EC) based cryptography, therefore optimizing it is of high interest. The authors used a technique called *IBPV* described in [6], which is based on precomputation of a set of Discrete Log pairs. The mathematical details have been purposefully omitted, since they are not relevant for this description. The *IBPV* technique was used to improve the performance of the ECDSA signature and was also extended to the ECDH protocol. In order to reduce the time it takes to do the ECDSA signature verification, the *Shamir trick* was used, which allows to perform the sum of two scalar multiplications (frequent operation in EC cryptography) faster than performing two independent scalar multiplications.

The results showed that the ECC optimizations outperform the scalar multiplication in the state of the art class 1 device platforms, while also improving the network lifetime by a factor of up to 6.5 with respect to a standard, non-optimized implementation. Leaving reliability and fragmentation tasks to CoAP, reduces the DTLS implementation code size by approximately 23%.

[RFC 7925](#)[60] describes a TLS and DTLS 1.2 profile for IoT devices that offers communication security services for IoT applications and is reasonably implementable on many constrained devices. In this context, "profile" means available configuration options (ex: which cipher suites to use) and protocol extensions that are best suited for IoT devices. The document is rather lengthy, only its fundamental parts will be summarized. Some Request For Comment (RFC)s that are relevant to this will also be described.

The RFC explores both cases constrained clients and constrained servers, specifying a profile for each one and describing the main challenges faced in each scenario. The profile specifications for constrained clients and servers are very similar. Code reuse in order to minimize the implementation size is recom-

mended. For example, an IoT device using a network access solution based on TLS, such as EAP-TLS[57] can reuse most parts of the code for (D)TLS at the application layer.

For the credential types the profile considers 3 cases:

- PSK - authentication based on PSKs is described in [RFC 4249](#)[30]. When using PSKs, the client indicates which key it uses by including a PSK identity in its ClientKeyExchange message. A server can have different PSK identities shared with different clients. An identity can have any size, up to a maximum of [128 bytes](#). The profile recommends the use of shorter PSK identities and specifies [TLS_PSK_WITH_AES_128_CCM_8](#) as the only mandatory-to-implement ciphersuite to be used with PSKs, just like CoAP does. PFS is a property that preserves the confidentiality of past interactions even if the long-term secret is compromised. If a PFS ciphersuite is used, ephemeral DH keys should not be reused over multiple protocol exchanges.
- RPK - the use of RPKs in (D)TLS is described in [RFC 7250](#)[61]. With RPKs, only a subset of the information found in typical certificates is used: namely the [SubjectPublicKeyInfo](#) structure, which contains the necessary parameters to describe the public key (the algorithm identifier and the public key itself). Other PKIX certificate[24] parameters are omitted, making the resulted RPK smaller in size, when compared to the original certificate and the code to process the keys simpler. In order for the peers to negotiate the RPK use, two new extensions have been defined: one for the client to list the certificate types that it supports (sorted by order of preference) and one for the indicate which one it chose. To further reduce the size of the implementation, the [RFC 7250](#) recommends the use of the TLS Cached Information extension[53], which enables the TLS peers to exchange just the fingerprint (a shorter sequence of bytes used to identify a PubK) of the PubK. The only mandatory-to-implement ciphersuite to be used with RPKs is [TLS_ECDHE_ECDSA_WITH_AES_128_CCM_8](#), just like with CoAP. Note that the ciphersuite makes the use of AEAD.
- certificate - conventional certificates can also be used. The support for the Cached Information extension[53] and the [TLS_ECDHE_ECDSA_WITH_AES_128_CCM_8](#) ciphersuite is required. The profile restricts the use of named curves to the ones defined in [13]. For certificate revocation, neither the Online Certificate Status Protocol (OCSP)[52], nor the Certificate Revocation List (CRL)[24] mechanisms are used, instead this task is delegated to the software update functionality. The Cached Information extension does not provide any help with caching client certificates. For this reason, in cases where client-side certificates are used and the server is not constrained, the support for client certificate URLs is required. The client certificates URL extension[14] allows the clients to point the server to a URL from which it can obtain its certificate, which allows constrained clients to save memory and amount of transmitted data. The Trusted CA Indication[28] extension allows the clients to indicate which trust anchors they support, which is useful for constrained clients that due to memory limitation possess only a small number of CA root

keys, since it can avoid repeated handshake failures. If the clients interacts with dynamically discovered set of (D)TLS servers, the use of this extension is recommended, if that set is fixed, it is not recommended.

The signature algorithms extension[26] allows the client to indicate to the server which signature/hash pairs it supports to be used in digital signatures. The client must send this extension to indicate the use of [SHA-256](#), otherwise the defaults defined in [26] are used. This extension is not applicable when the PSK-based ciphersuites are used.

The profile mandates that constrained clients must implement the session resumption to improve the performance of the handshake since this will lead to less exchanged messages, lower computational overhead, since only symmetric cryptography is used, and it requires less bandwidth. In case the server is constrained, but the client is not, the client must implement the Session Resumption Without Server-Side State mechanism[51], which is achieved through the use of tickets. The server encapsulates the state into a ticket and forwards it to the client, which can subsequently resume the session by sending back that ticket. If both, the client and the server are constrained, both of them should implement [RFC 5077](#)[51].

The use of compression is not recommended for two reasons. First, [RFC7525](#)[55] recommends disabling (D)TLS level compression, due to attacks such as [CRIME](#)[59]. [RFC7525](#) provides recommendations for improving the security of deployed services that use TLS and DTLS and was published as a response to the various attacks on (D)TLS that have emerged over the years. Second, for IoT applications, the (D)TLS compression is not needed, since application-layer protocols are highly optimized and compression at the (D)TLS layer increases the implementation's size and complexity.

[RFC6520](#) defines a heartbeat mechanism to test whether the other peer is still alive. The implementation of this extension is recommended for server initiated messages. Note that since the messages to the client will most likely get blocked by the middleboxes, the initial connection set up is initiated by the client and then kept alive by the server.

Many of the usual sources of entropy, such as the timing of keystrokes and the mouse movements will not be available on many IoT devices, which means that either alternative ones need to be found or dedicated hardware must be added. IoT devices using (D)TLS must find ways to offer to generate quality random numbers, the guidelines and requirements for which can be found in [RFC4086](#)[29], since they play an essential role in the overall security of the protocol.

Implementations compliant with this profile must use AEAD ciphers, this means that encryption and MAC computation are no longer independent steps, which means that neither encrypt-then-MAC[32], nor the truncated MAC[28] extensions are applicable to this specification and must not be used.

The Server Name Indication (SNI) extension[28] defines a mechanism for a client to tell a (D)TLS server the name of the server it wants to connect to. This is crucial in case when multiple websites are hosted under the same IP address.

The implementation of this extension is required, unless the (D)TLS client does not interact with a server in a hosting environment.

The maximum fragment length extension[28] lowers the maximum fragment length support of the record layer from 2^{14} to 2^9 . This extension allows the client to indicate the server how much of the incoming data it is able to buffer, allowing the client implementations to lower their RAM requirements, since it does not need to accept packets of large size, such as the 16K packets required by plain (D)TLS. For that reason, client implementations must support this extension.

The Session Hash Extended Master Secret Extension [10] defines an extension that binds the master secret to the log of the full handshake, thus preventing MITM attacks, such as the tripple handshake[11]. Even though the ciphersuites recommended by the profile are not vulnerable to this attack, the implementation of this extension is advised. In order to prevent the renegotiation attack[47], the profile requires the TLS renegotiation feature to be disabled.

With regards to the key size recommendations, the authors recommend symmetric keys of at least **112 bit**, which corresponds to a **233-bit** ECC key and to a **2048** DH key. Those recommendations are made conservatively under the assumption that IoT devices have a long expected lifetime (10+ years) and that those key recommendations refer to the long-term keys used for device authentication. Keys that are provisioned dynamically and used for protection of transactional data, such as the ones used in (D)TLS ciphersuites, may be shorter, dependent on the sensitivity of transmitted data.

Even though TLS defines a single stream cipher: the RC4, its use is no longer recommended due to cryptographic weaknesses described in **RFC 7465**[42].

The **RFC 7925**[60] points out the importance of designing a software update mechanism into an IoT system is crucial to ensure that potential vulnerabilities can be fixed and that the functionality can be enhanced. The software update mechanism is important to change configuration information, such as trust anchors and other secret-key related information. Although the profile refers to **LM2M**[2] as an example of protocol that comes with a suitable software update mechanism, there has been new work done in this area since the release of this profile. Namely, there is a document specifying an architecture for a firmware update mechanism for IoT devices[40] currently in "Internet-Draft" state.

4 Solution

4.1 Solution Architecture

Most of the work that has been done has been centered around DTLS, even though most of the solutions can be applied to both. Herein we want to explore TLS optimization more. There is clearly a need for that, specially with CoAP over TCP and TLS standard being currently developed. The CoAP[56] protocol is the HTTP for constrained devices and the mentioned standard does not explore any TLS optimizations, and since any IoT device using it in the future would benefit them, this is an important area to explore. None of the related

work centered around (D)TLS 1.3, mainly this is because the protocol is still in draft stages, major design changes however, should not be expected at this point.

Most of the work done in this area proposes a solution that is tied to a specific protocol, such as CoAP, or requires an introduction of a third-party entity, such as the trust anchor in the case of S3K[43] or even both. This two main issues: first, if the developer wants to use (D)TLS without using any specific protocol for which the solution was tuned for (such as CoAP), he might see himself in some trouble, and second the requirement of a third-party introduces additional cost and complexity, which will be a big resistance factor in adopting that technology. This is specially true for developers who are doing hobby projects or projects for small businesses, leaving the communications insecure in the worse case scenario. The goal of this work is to design a solution that can be used out of the box and is not tailored towards any specific protocol, that is fully backwards compatible with the original protocol, that can be used with either TLS or DTLS and would work with both versions: (D)TLS 1.2 and the upcoming (D)TLS 1.3.

In order to achieve the goals described in this document above, the extension mechanism of TLS will be heavily relied upon. By using extensions, any deviations from the original protocol can be done, even if they completely change the it. This was confirmed by one of the TLS designers, after I asked this question on the official IETF mailing list[3], since neither of the four versions of the TLS protocol specifications, nor [RFC 4366](#) made it clear.

Ideas from TLS 1.3, such as [0-RTT data](#), which can be done if peers already share a PSK would be interesting to implement in the second part of the work. For example, this can be very useful in the context of the temperature sensor described in the introduction, where the sensors sends data to a server every 30 seconds. With [0-RTT data](#), it can communicate securely with minimal costs. The use of symmetric cryptography exclusively, has various additional advantages in the context of IoT, which were already mentioned, so there is value in exploring solutions that revolve around PSKs and that avoid public key cryptography altogether.

Not all IoT devices are limited to the point of not being able to use public key cryptography at all. For some of them, the use of something like raw public keys, which is considered the first entry point into the area of PubK cryptography, is acceptable, while others are powerful enough to take advantage of certificates and Public Key Infrastructure (PKI), at least up to some point. My solution would be adaptable to any of those scenarios, depending on the context and the security requirements, therefore being similar to a framework. For example, some scenarios might not require integrity, but not privacy. For those, it makes no sense to pay the energy and time overhead of encryption. Special care in the selection of cipher suites and key exchange methods needs to be taken, possibly even developing new ones.

(D)TLS 1.2 is significantly different from (D)TLS 1.3 and there has been no work like [RFC 7924](#)[53] done for (D)TLS 1.3 and it would be interesting to

explore this. TLS 1.3 has many fundamental changes to the way the handshake is done, bringing many new features, whose ideas can be incorporated into my proposed solution and even backported to TLS 1.2.

4.2 Evaluation

In order to evaluate how good the result of the work is, both, the original protocol implementation and the one provided as part of the solution, will be profiled and compared. The relevant profiling metrics are power consumption, RAM usage, storage usage, CPU cycles used and time taken. The profiling will be done over various simulated scenarios, which emulate real-life usage, such as connecting to the server multiple times over a short time period and transfer small quantity of data, connecting to the server and transferring a large amount of data all at once, and so on.

Due to limited time and the fact that TLS 1.3 still lacks stable implementations, most likely only the solution under TLS 1.2 will be evaluated.

4.3 Planning

During the month of February 2018, I will work on defining my solution precisely. Due to the nature of the solution, it will have many different versions, depending on the target device and required security guarantees. Most probably, I will not have time to implement and evaluate every possible scenario, so I will have to choose only a few of them. During month of March 2018, I will implement the solution in code, by modifying the mbedTLS 2.6.0 library[1] code, decide which metrics I want to evaluate, set up the profiling code and design the testing scenarios. From early April 2018 until March 2018 I will be evaluating my solution and concentrate more on writing the dissertation's text.

4.4 Conclusion

The lack of security in IoT is a serious issue that has a high monetary cost when botnets infect the devices. Recent botnet attacks show that serious damage can be caused. An old saying attributed to the US National Security Agency (NSA) states that "Attacks always get better; they never get worse". Combined with the fact that the number of IoT devices is growing at a high pace, while there are no major improvements to their security, makes it clear that it is fundamental for this area to be addressed.

While there are well established security solutions, not all of them can be used with the IoT devices, due their constrained nature. One such solution is the (D)TLS protocol, that due to its heavyweight nature cannot be used as a security solution for the constrained IoT devices. With my future work, I want to contribute to this area, by designing a solution that is transparent to the programmer, with the provided security services adaptable to the specific context needs.

References

1. mbed TLS (formerly PolarSSL): SSL/TLS Library For Embedded Devices, <https://tls.mbed.org/>, (Accessed on 12/19/2017)
2. LightweightM2M V1.0 Overview (2017), http://www.openmobilealliance.org/wp/Overviews/lightweightm2m_overview.htm, (Accessed on 12/30/2017)
3. Re: [TLS] TLS Extensions: Omitting Handshake Messages. <https://www.ietf.org/mail-archive/web/tls/current/msg24932.html> (2017), (Accessed on 01/04/2018)
4. SMALT - The Smart Home Device That Elevates Your Dining Experience. Electronic Gadget (2017), <http://www.mysmalt.com/>, (Accessed on 01/05/2018)
5. Antonakakis, M., April, T., Bailey, M., Bernhard, M., Bursztein, E., Cochran, J., Durumeric, Z., Halderman, J.A., Invernizzi, L., Kallitsis, M., et al.: Understanding the mirai botnet (2017)
6. Ateniese, G., Bianchi, G., Caposelle, A., Petrioli, C.: Low-cost standard signatures in wireless sensor networks: a case for reviving pre-computation techniques? In: Proceedings of NDSS 2013 (2013)
7. Ayadi, A., Ros, D., Toutain, L.: TCP header compression for 6LoWPAN. Internet-Draft draft-aayadi-6lowpan-tcphc-01, IETF Secretariat (October 2010), <http://www.ietf.org/internet-drafts/draft-aayadi-6lowpan-tcphc-01.txt>, <http://www.ietf.org/internet-drafts/draft-aayadi-6lowpan-tcphc-01.txt>
8. Badra, M., Hajjeh, I.: ECDHE_PSK Cipher Suites for Transport Layer Security (TLS). RFC 5489, RFC Editor (March 2009)
9. Barker, E.: Recommendation for Key Management, Part 1: General. NIST special publication (2016), <http://nvlpubs.nist.gov/nistpubs/SpecialPublications/NIST.SP.800-57pt1r4.pdf>
10. Bhargavan, K., Delignat-Lavaud, A., Pironti, A., Langley, A., Ray, M.: Transport Layer Security (TLS) Session Hash and Extended Master Secret Extension. RFC 7627, RFC Editor (September 2015)
11. Bhargavan, K., Lavaud, A.D., Fournet, C., Pironti, A., Strub, P.Y.: Triple handshakes and cookie cutters: Breaking and fixing authentication over tls. In: Security and Privacy (SP), 2014 IEEE Symposium on. pp. 98–113. IEEE (2014)
12. Biryukov, A., Perrin, L.P.: State of the art in lightweight symmetric cryptography (2017)
13. Blake-Wilson, S., Bolyard, N., Gupta, V., Hawk, C., Moeller, B.: Elliptic Curve Cryptography (ECC) Cipher Suites for Transport Layer Security (TLS). RFC 4492, RFC Editor (May 2006), <http://www.rfc-editor.org/rfc/rfc4492.txt>, <http://www.rfc-editor.org/rfc/rfc4492.txt>
14. Blake-Wilson, S., Nystrom, M., Hopwood, D., Mikkelsen, J., Wright, T.: Transport Layer Security (TLS) Extensions. RFC 4366, RFC Editor (April 2006), <http://www.rfc-editor.org/rfc/rfc4366.txt>, <http://www.rfc-editor.org/rfc/rfc4366.txt>
15. Blumenthal, U., Goel, P.: Pre-Shared Key (PSK) Ciphersuites with NULL Encryption for Transport Layer Security (TLS). RFC 4785, RFC Editor (January 2007)
16. Bormann, C.: 6LoWPAN-GHC: Generic Header Compression for IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs). RFC 7400, RFC Editor (November 2014)
17. Bormann, C., Ersue, M., Keranen, A.: Terminology for Constrained-Node Networks. RFC 7228, RFC Editor (May 2014), <http://www.rfc-editor.org/rfc/rfc7228.txt>, <http://www.rfc-editor.org/rfc/rfc7228.txt>

18. Bormann, C., Shelby, Z.: Block-Wise Transfers in the Constrained Application Protocol (CoAP). RFC 7959, RFC Editor (August 2016)
19. Bormann, C., Lemay, S., Tschofenig, H., Hartke, K., Silverajan, B., Raymor, B.: CoAP (Constrained Application Protocol) over TCP, TLS, and WebSockets. Internet-Draft draft-ietf-core-coap-tcp-tls-11, IETF Secretariat (December 2017), <http://www.ietf.org/internet-drafts/draft-ietf-core-coap-tcp-tls-11.txt>, <http://www.ietf.org/internet-drafts/draft-ietf-core-coap-tcp-tls-11.txt>
20. Bundesamt für Sicherheit in der Informationstechnik (BSI): Kryptographische Verfahren: Empfehlungen und Schlüssellängen, Version 2017-01 (2017)
21. Caposelle, A., Cervo, V., De Cicco, G., Petrioli, C.: Security as a coap resource: an optimized dtls implementation for the iot. In: Communications (ICC), 2015 IEEE International Conference on. pp. 549–554. IEEE (2015)
22. Checkoway, S., Maskiewicz, J., Garman, C., Fried, J., Cohn, S., Green, M., Heninger, N., Weinmann, R.P., Rescorla, E., Shacham, H.: A systematic analysis of the juniper dual ec incident. In: Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security. pp. 468–479. ACM (2016)
23. Cooper, D., Santesson, S., Farrell, S., Boeyen, S., Housley, R., Polk, W.: Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile. RFC 5280, RFC Editor (May 2008), <http://www.rfc-editor.org/rfc/rfc5280.txt>, <http://www.rfc-editor.org/rfc/rfc5280.txt>
24. Cooper, D., Santesson, S., Farrell, S., Boeyen, S., Housley, R., Polk, W.: Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile. RFC 5280, RFC Editor (May 2008), <http://www.rfc-editor.org/rfc/rfc5280.txt>, <http://www.rfc-editor.org/rfc/rfc5280.txt>
25. Cusack, F., Forssen, M.: Generic Message Exchange Authentication for the Secure Shell Protocol (SSH). RFC 4256, RFC Editor (January 2006)
26. Dierks, T., Rescorla, E.: The Transport Layer Security (TLS) Protocol Version 1.2. RFC 5246, RFC Editor (August 2008), <http://www.rfc-editor.org/rfc/rfc5246.txt>, <http://www.rfc-editor.org/rfc/rfc5246.txt>
27. Dierks, T., Allen, C.: The TLS Protocol Version 1.0. RFC 2246, RFC Editor (January 1999), <http://www.rfc-editor.org/rfc/rfc2246.txt>, <http://www.rfc-editor.org/rfc/rfc2246.txt>
28. Eastlake, D.: Transport Layer Security (TLS) Extensions: Extension Definitions. RFC 6066, RFC Editor (January 2011), <http://www.rfc-editor.org/rfc/rfc6066.txt>, <http://www.rfc-editor.org/rfc/rfc6066.txt>
29. Eastlake, D., Schiller, J., Crocker, S.: Randomness Requirements for Security. BCP 106, RFC Editor (June 2005), <http://www.rfc-editor.org/rfc/rfc4086.txt>, <http://www.rfc-editor.org/rfc/rfc4086.txt>
30. Eronen, P., Tschofenig, H.: Pre-Shared Key Ciphersuites for Transport Layer Security (TLS). RFC 4279, RFC Editor (December 2005), <http://www.rfc-editor.org/rfc/rfc4279.txt>, <http://www.rfc-editor.org/rfc/rfc4279.txt>
31. Gura, N., Patel, A., Wander, A., Eberle, H., Shantz, S.C.: Comparing elliptic curve cryptography and rsa on 8-bit cpus. In: CHES. vol. 4, pp. 119–132. Springer (2004)
32. Gutmann, P.: Encrypt-then-MAC for Transport Layer Security (TLS) and Datagram Transport Layer Security (DTLS). RFC 7366, RFC Editor (September 2014), <http://www.rfc-editor.org/rfc/rfc7366.txt>, <http://www.rfc-editor.org/rfc/rfc7366.txt>
33. Haberman, B.: IP Forwarding Table MIB. RFC 4292, RFC Editor (April 2006)

34. Hui, J., Thubert, P.: Compression Format for IPv6 Datagrams over IEEE 802.15.4-Based Networks. RFC 6282, RFC Editor (September 2011), <http://www.rfc-editor.org/rfc/rfc6282.txt>, <http://www.rfc-editor.org/rfc/rfc6282.txt>
35. Katagi, M., Moriai, S.: Lightweight cryptography for the internet of things. Sony Corporation pp. 7–10 (2008)
36. Keoh, S., Kumar, S., Shelby, Z.: Profiling of DTLS for CoAP-based IoT Applications. Internet-Draft draft-keoh-dtls-profile-iot-00, IETF Secretariat (June 2013), <http://www.ietf.org/internet-drafts/draft-keoh-dtls-profile-iot-00.txt>, <http://www.ietf.org/internet-drafts/draft-keoh-dtls-profile-iot-00.txt>
37. Krawczyk, H., Eronen, P.: HMAC-based Extract-and-Expand Key Derivation Function (HKDF). RFC 5869, RFC Editor (May 2010), <http://www.rfc-editor.org/rfc/rfc5869.txt>, <http://www.rfc-editor.org/rfc/rfc5869.txt>
38. Krebs, B.: Reaper: Calm before the iot security storm? krebs on security. <https://krebsonsecurity.com/2017/10/reaper-calm-before-the-iot-security-storm/> (10 2017), (Accessed on 01/04/2018)
39. Montenegro, G., Kushalnagar, N., Hui, J., Culler, D.: Transmission of IPv6 Packets over IEEE 802.15.4 Networks. RFC 4944, RFC Editor (September 2007), <http://www.rfc-editor.org/rfc/rfc4944.txt>, <http://www.rfc-editor.org/rfc/rfc4944.txt>
40. Moran, B., Meriac, M., Tschofenig, H.: A Firmware Update Architecture for Internet of Things Devices. Internet-Draft draft-moran-suit-architecture-00, IETF Secretariat (October 2017), <http://www.ietf.org/internet-drafts/draft-moran-suit-architecture-00.txt>, <http://www.ietf.org/internet-drafts/draft-moran-suit-architecture-00.txt>
41. Neuman, C., Yu, T., Hartman, S., Raeburn, K.: The Kerberos Network Authentication Service (V5). RFC 4120, RFC Editor (July 2005), <http://www.rfc-editor.org/rfc/rfc4120.txt>, <http://www.rfc-editor.org/rfc/rfc4120.txt>
42. Popov, A.: Prohibiting RC4 Cipher Suites. RFC 7465, RFC Editor (February 2015), <http://www.rfc-editor.org/rfc/rfc7465.txt>, <http://www.rfc-editor.org/rfc/rfc7465.txt>
43. Raza, S., Seitz, L., Sitenkov, D., Selander, G.: S3k: Scalable security with symmetric key establishment for the internet of things. IEEE Transactions on Automation Science and Engineering 13(3), 1270–1280 (2016)
44. Raza, S., Shafagh, H., Hewage, K., Hummen, R., Voigt, T.: Lithe: Lightweight secure coap for the internet of things. IEEE Sensors Journal 13(10), 3711–3720 (2013)
45. Raza, S., Tralbalza, D., Voigt, T.: 6lowpan compressed dtls for coap. In: Distributed Computing in Sensor Systems (DCOSS), 2012 IEEE 8th International Conference on. pp. 287–289. IEEE (2012)
46. Rescorla, E., Modadugu, N.: Datagram Transport Layer Security Version 1.2. RFC 6347, RFC Editor (January 2012), <http://www.rfc-editor.org/rfc/rfc6347.txt>, <http://www.rfc-editor.org/rfc/rfc6347.txt>
47. Rescorla, E., Ray, M., Dispensa, S., Oskov, N.: Transport Layer Security (TLS) Renegotiation Indication Extension. RFC 5746, RFC Editor (February 2010), <http://www.rfc-editor.org/rfc/rfc5746.txt>, <http://www.rfc-editor.org/rfc/rfc5746.txt>
48. Rescorla, E.: The Transport Layer Security (TLS) Protocol Version 1.3. Internet-Draft draft-ietf-tls-tls13-22, IETF Secretariat (November 2017), <http://www.ietf.org/internet-drafts/draft-ietf-tls-tls13-22.txt>, <http://www.ietf.org/internet-drafts/draft-ietf-tls-tls13-22.txt>

49. Rescorla, E., Tschofenig, H., Modadugu, N.: The Datagram Transport Layer Security (DTLS) Protocol Version 1.3. Internet-Draft draft-ietf-tls-dtls13-22, IETF Secretariat (November 2017), <http://www.ietf.org/internet-drafts/draft-ietf-tls-dtls13-22.txt>, <http://www.ietf.org/internet-drafts/draft-ietf-tls-dtls13-22.txt>
50. Ronen, E., Shamir, A., Weingarten, A.O., OFlynn, C.: Iot goes nuclear: Creating a zigbee chain reaction. In: Security and Privacy (SP), 2017 IEEE Symposium on. pp. 195–212. IEEE (2017)
51. Salowey, J., Zhou, H., Eronen, P., Tschofenig, H.: Transport Layer Security (TLS) Session Resumption without Server-Side State. RFC 5077, RFC Editor (January 2008), <http://www.rfc-editor.org/rfc/rfc5077.txt>, <http://www.rfc-editor.org/rfc/rfc5077.txt>
52. Santesson, S., Myers, M., Ankney, R., Malpani, A., Galperin, S., Adams, C.: X.509 Internet Public Key Infrastructure Online Certificate Status Protocol - OCSP. RFC 6960, RFC Editor (June 2013), <http://www.rfc-editor.org/rfc/rfc6960.txt>, <http://www.rfc-editor.org/rfc/rfc6960.txt>
53. Santesson, S., Tschofenig, H.: Transport Layer Security (TLS) Cached Information Extension. RFC 7924, RFC Editor (July 2016)
54. Seggelmann, R., Tuexen, M., Williams, M.: Transport Layer Security (TLS) and Datagram Transport Layer Security (DTLS) Heartbeat Extension. RFC 6520, RFC Editor (February 2012), <http://www.rfc-editor.org/rfc/rfc6520.txt>, <http://www.rfc-editor.org/rfc/rfc6520.txt>
55. Sheffer, Y., Holz, R., Saint-Andre, P.: Recommendations for Secure Use of Transport Layer Security (TLS) and Datagram Transport Layer Security (DTLS). BCP 195, RFC Editor (May 2015), <http://www.rfc-editor.org/rfc/rfc7525.txt>, <http://www.rfc-editor.org/rfc/rfc7525.txt>
56. Shelby, Z., Hartke, K., Bormann, C.: The constrained application protocol (coap). RFC 7252, RFC Editor (June 2014), <http://www.rfc-editor.org/rfc/rfc7252.txt>, <http://www.rfc-editor.org/rfc/rfc7252.txt>
57. Simon, D., Aboba, B., Hurst, R.: The EAP-TLS Authentication Protocol. RFC 5216, RFC Editor (March 2008), <http://www.rfc-editor.org/rfc/rfc5216.txt>, <http://www.rfc-editor.org/rfc/rfc5216.txt>
58. Steve Gibson, L.L.: Securitynow podcast episodes, <https://www.grc.com/securitynow.htm>
59. Tal Be'ery, A.S.: A perfect CRIME? Only TIME will tell. <https://media.blackhat.com/eu-13/briefings/Beery/bh-eu-13-a-perfect-crime-beery-wp.pdf> (2013), (Accessed on 01/04/2018)
60. Tschofenig, H., Fossati, T.: Transport Layer Security (TLS) / Datagram Transport Layer Security (DTLS) Profiles for the Internet of Things. RFC 7925, RFC Editor (July 2016)
61. Wouters, P., Tschofenig, H., Gilmore, J., Weiler, S., Kivinen, T.: Using Raw Public Keys in Transport Layer Security (TLS) and Datagram Transport Layer Security (DTLS). RFC 7250, RFC Editor (June 2014)

Glossary

| | |
|-------|---|
| AC | Asymmetrical Cryptography. 3 |
| AE | Authenticated Encryption. 4 |
| AEAD | Authenticated Encryption With Associated Data. 4–7, 9, 15, 23, 24 |
| CA | Certification Authority. 3, 23 |
| CoAP | Constrained Application Protocol. 21–23, 25, 26 |
| CRL | Certificate Revocation List. 23 |
| DDoS | Distributed Denial-Of-Service. 1, 2 |
| DH | Diffie-Hellman. 10, 13, 15, 23, 25 |
| DoS | Denial-of-Service. 16 |
| DTLS | Datagram TLS. 1, 2, 16, 20–22, 24–26 |
| EC | Elliptic Curve. 22 |
| ECC | Elliptic Curve Cryptography. 3, 4, 10, 11, 18, 21, 22, 25 |
| ECDH | Elliptic Curve Diffie-Hellman. 11, 22 |
| ECDHE | Elliptic Curve Diffie-Hellman Ephemeral. 11 |
| ECDSA | Elliptic Curve Digital Signature Algorithm. 11, 22 |
| HKDF | HMAC-based Extract-and-Expand Key Derivation Function. 6, 9 |
| HTML | Hypertext Markup Language. 7 |
| HTTPS | Hypertext Transfer Protocol Secure. 7 |
| IETF | Internet Engineering Task Force. 5, 26 |
| IoT | Internet Of Things. 1–3, 15–17, 19, 21–27 |
| IV | Initialization Vector. 10 |
| MAC | Message Authentication Code. 4, 5, 7, 9, 10, 14, 16, 24 |
| MITM | Man In The Middle. 10, 13, 25 |
| NSA | US National Security Agency. 27 |
| OCSP | Online Certificate Status Protocol. 23 |
| PFS | Perfect Forward Secrecy. 10, 15, 23 |

| | |
|-------|---|
| PKC | Public Key Cryptography. 5 |
| PKI | Public Key Infrastructure. 26 |
| PMS | premaster secret. 10 |
| PRF | Pseudo-Random Function. 6, 9, 10 |
| PrivK | Private Key. 3, 10 |
| PSK | Pre-Shared Key. 5, 15, 16, 19, 23, 24, 26 |
| PubK | Public Key. 3, 4, 10, 12, 18, 19, 23, 26 |
| | |
| RFC | Request For Comment. 22 |
| RPK | Raw Public Key. 19, 23 |
| RSA | Rivest-Shamir-Adleman. 10 |
| | |
| SC | Symmetrical Cryptography. 3 |
| SCA | Side-Channel Attack. 17 |
| SNI | Server Name Indication. 24 |
| SSL | Secure Sockets Layer. 5 |
| | |
| TLS | Transport Layer Security. 1–16, 19, 21–27 |