

# NTC and PTC thermistors

Alessandro Trigolo

2023/2024

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
<b>2</b>	<b>Background</b>	<b>3</b>
2.1	Outermost orbit and valence electrons . . . . .	3
2.2	Semiconductor materials . . . . .	4
2.3	History of thermistors . . . . .	5
<b>3</b>	<b>PTC thermistors</b>	<b>5</b>
3.1	Charateristics . . . . .	5
3.2	Applications . . . . .	7

# 1 Introduction

This document aims to give a complete introduction to the world of thermistors. A thermistor, also called *thermally sensitive resistor*, is a device whose electrical resistivity is strictly bonded with the temperature. More precisely, there are two types of thermistors. The first one is called negative-temperature-coefficient (or **NTC**), meaning that its resistance changes in the opposite way of temperature: when the temperature raises, the resistance decreases, and vice-versa. The second type is the positive-temperature-coefficient thermistor (also known as **PTC**) which means that its resistivity increases if the environment gets hotter and is reduced when the temperature decreases.

## 2 Background

This chapter focuses on a brief explanation of the physics behind thermistors by introducing and discussing the structure of the atom and the most crucial information that is needed for a better understanding of the topic. Then the attention will be shifted to discussing a specific type of material, known as semiconductors, that are largely utilized for the creation of electric components as far as thermistors.

### 2.1 Outermost orbit and valence electrons

As is common knowledge, everything is made out of atoms, every living creature and every unanimated object. An atom is made out of three subatomic particles. The protons (which have a positive electric charge) and the neutrons constitute the nuclei of the atom. The electrons, carrying a negative charge, orbit around the nucleus in distinct orbits.

By observing the figure 1, it is possible to distinguish two important types of electrons: the inner electrons, which orbit around the inner shells, and the valence electrons that orbit in the **valence shell** (also called the outermost orbit). These electrons are crucial for determining the properties of the material [1]. Particularly

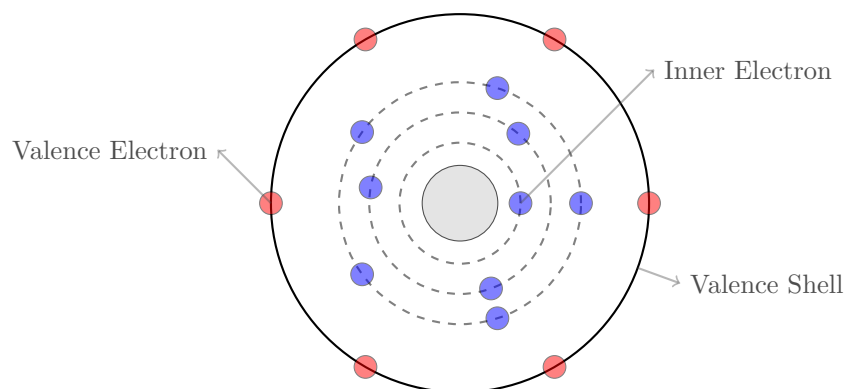


Figure 1: The orbits and electrons of an atom.

depending on how much energy these electrons have, a material is going to be a good conductor rather than a good insulator.

Complete the introduction, add all the information needed and suggested in paper-backbone.md

Make the introduction a little longer.

Insert history of thermistor

When the outermost orbit is incomplete, valence electrons are separable from the atom. In some cases, at room temperature, there is enough energy to remove these electrons from the orbit. This is the case for most conductive elements like metals (copper, silver and gold) which can easily propagate both electricity and heat. On the other hand, when a great amount of energy is needed to remove one valence electron from the valence orbit, the material is an insulator (also known as dielectric) like wood, glass or rubber [1].

## 2.2 Semiconductor materials

Other than conductors and dielectric elements there are other types of materials like semiconductors. This particular type of material is rather important to discuss because it is the key element in creating a thermistor. The peculiarity of a semiconductor element is that its conductivity stands between the inductors and the dielectric materials. The most common semiconductor materials are silicon and germanium but it is also used zinc, cadmium, boron and more [1].

These types of materials are highly popular because of their properties:

- They are light weight-wise and small dimension-wise;
- They are highly energy-efficient because they work with low voltage;
- Long-term degradation effects are insignificant.

Additionally, generally, the semiconductor materials are *negative temperature coefficient* meaning that their conductivity increases with the temperature, and so the resistivity of the element decreases non-linearly. But this also means that when the temperatures are extremely low (near zero Kelvin) their conductivity properties are comparable to a dielectric material (so their resistance is extremely high).

It is important to note that the semiconductors do not follow Ohm's law. More precisely the current increases much more than the voltage; this peculiarity is used for the BJT transistors. Furthermore, specifically because of the resistivity/temperature curve they are widely used in thermistors, rectifiers, Zener diodes, varistors and photovoltaic cells [1].

### Other types of materials

It is worth mentioning that the three types of material aforementioned are not the only ones. The *superconductors* are materials whose electrical resistivity reaches almost zero when the temperature is greatly below zero Celsius. These materials are usually metals or ceramics [1].

Moreover, there are *magnetic materials* that can differ in several types depending on their capability of being magnetized by magnetic fields. The diamagnetic and paramagnetic materials have a very low magnetic susceptibility (between  $10^{-6}$  and  $10^{-3}$ ) meaning that they are not likely to propagate a magnetic field. Then there are the ferromagnetic and ferrimagnetic materials whose magnetic susceptibility depends on the magnetic field strength. Eventually, there are also antiferromagnetic materials whose susceptibility increases as the temperature increases but when the element reaches a critical temperature, the susceptibility starts decreasing again [1][2].

Furthermore, it is also important to mention the *ferroelectrics* which are a type of material whose natural electric polarization can be changed by the presence of an electric field [1][4].

## 2.3 History of thermistors

# 3 PTC thermistors

As aforementioned, a positive temperature coefficient thermistor is a thermally sensitive resistor that varies its resistivity as the temperature of the environment changes. Particularly because it is a positive coefficient, as the temperature increases, the resistivity of the semiconductor device increases as well.

## 3.1 Characteristics

One of the most important properties of the PTC thermistor is the characteristic curve between the **resistance**  $R$  and the **temperature**  $T$ , which has to be converted from Celsius (or Fahrenheit) to Kelvin. Its curve is a positive exponential graph that respects the following equation [3]:

$$R = R_0 e^{\beta (\frac{1}{T} - \frac{1}{T_0})}$$

Where  $R$  is the calculated resistance at the temperature  $T$  and  $R_0$  is the resistance measured at temperature  $T_0$ . The coefficient  $\beta$  is the thermistor constant and it depends on the materials used to build it and on the thermistor dimensions. It is possible to obtain this value by measuring its resistance value at two different temperatures and computing the following equation [3].

$$\beta = \frac{\ln \frac{R_2}{R_1}}{\frac{1}{T_2} - \frac{1}{T_1}}$$

Using the previous equations, the curve can be plotted by writing down the equations using MATLAB, or other programming languages. Figure 3.1 shows how much the resistance increases as the temperature increases. In this case, the coefficient  $\beta$  has been calculated by assuming that when  $T_1 = 273.15K$ ,  $R_1 = 1k\Omega$  and when  $T_2 = 373.15K$ ,  $R_2 = 100M\Omega$ .<sup>1</sup>

---

<sup>1</sup>Please be aware that the selected values are purely for illustrative purposes; no devices with these characteristics exist in reality

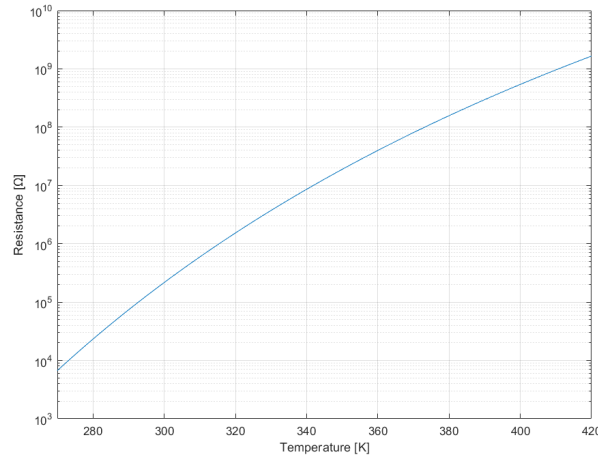


Figure 2: PTC resistance-temperature logarithmic curve.

Secondly it might be interesting to plot the change ratio between the resistance  $R$  and the value of the resistance at some fixed temperature. In the figure 3.1, the fixed temperature value  $T_0$  was 25° celsius (or 298.15 Kelvin) which implies that  $R_0 = 16.7k\Omega$ .

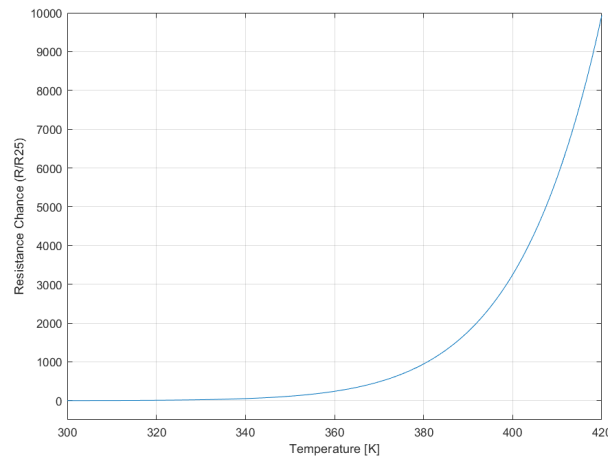


Figure 3: PTC change ratio between  $R$  and  $R_0$

In both of the plots the resistance value or the change ratio drastically increases as the environment gets hotter. In the next paragraph, we will see how important this characteristic is for building current-regulating circuits and protecting delicate components.

V - I characteristic curve

other aspects like the dissipation constants, noise, long term stability

## 3.2 Applications

## References

- [1] K.M. Gupta and Nishu Gupta. Semiconductor materials: Their properties, applications, and recent advances. *Engineering Materials*, page 3 – 40, 2016. Cited by: 4.
- [2] Carl Heck. *Magnetic materials and their applications*. Elsevier, 2013.
- [3] O. Saburi and K. Wakino. Processing techniques and applications of positive temperature coefficient thermistors. *IEEE Transactions on Component Parts*, 10(2):53 – 67, 1963. Cited by: 63.
- [4] Roger Whatmore. Ferroelectric materials. *Springer Handbook of Electronic and Photonic Materials*, pages 1–1, 2017.