

## **LED 120W HW Street Light**

### **HLSLD-ML04-120-CWL-HL2-PD**

As per IS 10322 (Part-5/Sec-3) & IEC 60598-1


**Product Description:** Energy efficient 120W LED Street Light

#### **Technical Specifications:**

Housing Material:	Aluminum PDC, Top maintainable
Front Cover:	Clear toughened glass
Lens:	Suitable high efficient secondary lens
LED:	LM80 certified LED
LED Lumen Maintenance:	50,000 hours @ L70
Control Gear:	Isolated, Electronic, CC driver-Philips make
Internal Wiring:	Insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP66
Impact Resistance:	>IK07
Operating Voltage:	140V~270V
Operating Temperature:	-10°C~ 50°C



#### **GA Drawing:**

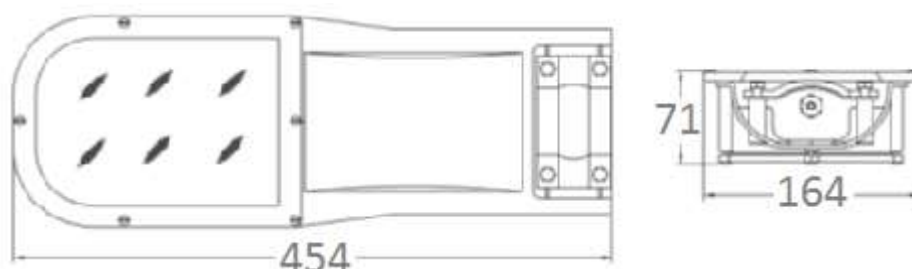

All dimensions are in mm (Tolerance:  $\pm 5$ mm)

#### **Electrical & Photometry Parameters:**

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	120W $\pm 5\%$	<553mA	$\geq 0.95$	$\geq 120$ lm/W	5700K	$\geq 70$	$\leq 10\%$	$\geq 85\%$

#### **System Protections:**

Open & Short circuit protection, reverse polarity protection, high voltage cut off at 300V $\pm 10$ V and 4KV Internal Surge protection + 10KV SPD external.

#### **Application:**

Street and road lighting, city squares, periphery lighting, complex boundary lighting, outdoor lighting, etc.

#### **Mounting:**

Pole mounting, suitable up to 60mm OD pipe bracket.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt. Ltd. reserves the right to make changes in the design and data and withdraw the luminaries without any prior notice.	Prepared by :	MK./NK	Industrial Luminaire :
	Checked by :	AS	Cat. Ref. : HLSLD-ML04-120-CWL-HL2-PD
	Approved by :	RL	Document No : HWR-2019-KML

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.