

LED 120W Flood Light with SPD

HLFLD-ML17-120-CW

As per IS 10322(Part-5/Sec-5) & IEC 60598-1

Product Description: Energy efficient 100W LED Flood Light

Technical Specifications:

Main Housing/heat sink Material:

Aluminum PDC

Front Cover:

Toughened Glass

LED:

LM80 certified LED

Control Gear:

Isolated, Electronic, CC driver

Internal Wiring:

Insulated Cu wire

Hardware:

SS & MS Zinc plated and passivated

Ingress Protection:

IP65

Impact resistance:

IK05


Operating Voltage Range:

140V~ 270V

Operating Temperature:

-10°C~ 50°C

GA Drawing:

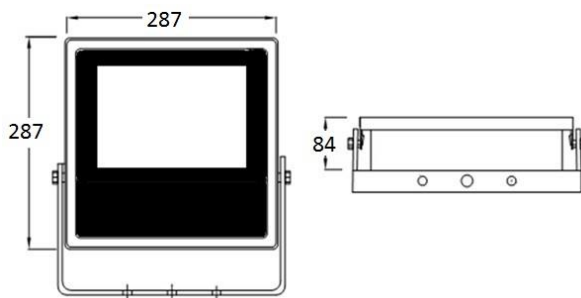

Tolerance $\pm 5\text{mm}$

Electrical & Photometry Parameters:

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	120W $\pm 5\%$	<552mA	≥ 0.95	$\geq 90\text{lm/W}$	6500K	≥ 70	$\leq 10\%$	$\geq 85\%$

System Protections:

Open & Short circuit protection, reverse polarity protection, surge protection of 4.0KV internal + 10KV SPD.

Application:

Open area lighting, industrial periphery lighting, parking, etc.

Mounting:

Through bracket.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt Ltd reserves the right to make changes in the design and data and withdraw the luminaires without any prior notice.

Prepared by :

MK/NK

Industrial Luminaire :

Checked by :

AS

Cat. Ref. : HLFLD-ML17-120-CW

Approved by :

RL

Document No : STR-2018

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.

