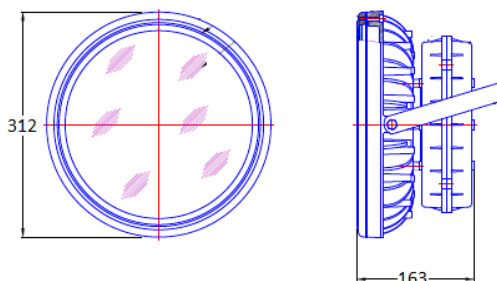


LED 100W LW Bay Light**HLBLD-ML07-100-CWL-RL**

As per IS 10322 (Part-5/Sec-1) & IEC 60598-1

**Product Description:** Energy efficient 100W LED Bay Light**Technical Specifications:**

Main Housing / Heat Sink Material:	Aluminum die casting
CG Box Material:	Aluminum die casting
Front Cover:	Clear toughened glass
Lens:	Suitable high efficient secondary lens
LED:	LM80 certified LED
Lumen Maintenance:	50000 hours @ L70
Control Gear:	Isolated, Electronic, CC Driver
Internal Wiring:	Insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP66
Impact Resistance:	IK08
Operating Voltage Range:	120V~285V
Operating Temperature:	-10°C~ 50°C

GA Drawing:All dimensions in mm (Tolerance: ± 5 mm)**Electrical & Photometry Parameters:**

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	100W $\pm 10\%$	<482mA	≥ 0.95	$\geq 100\text{lm/W}$	5700K	≥ 70	$\leq 10\%$	$\geq 85\%$

System Protections:Open & Short circuit protection, reverse polarity protection, high voltage cut off at 300V ± 10 V, surge protection of 5KV +10KV SPD.**Application:**

Industries, stores, public places, supermarkets, etc.

Mounting:

Through bracket.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt. Ltd. reserves the right to make changes in the design and data and withdraw the luminaries without any prior notice.

Prepared by :	MK/NK	Industrial Luminaire :
Checked by :	AS	Cat. Ref. : HLBLD-ML07-100-CWL-RL
Approved by :	RL	Document No : HWR-R-2019

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.