

## **LED 220W HW Street Light**

### **HLSLD-15-220-CWL-R-HL2**

As per IS 10322 (Part-5/Sec-3) & IEC 60598-1




**Product Description:** Energy efficient 220W LED Street Light

### **Technical Specifications:**

Main Housing / Heat Sink Material:	Aluminium PDC
Front Cover:	Clear toughened glass
Lens:	Suitable high efficient secondary lens
LED:	LM80 certified LED
Lumen Maintenance:	50000 hours @ L70
Control Gear:	Isolated, Electronic, CC driver
Internal Wiring:	Insulated Cu wire
Hardwares:	SS & MS Zinc plated and passivated
Ingress Protection:	IP66
Impact Resistance:	IK05
Operating Voltage Range:	140V~ 270V
Operating Temperature:	-10°C~ 50°C

### **GA Drawing:**

A: 643mm  
 B: 292mm  
 C: 120mm  
 Φ: 70mm

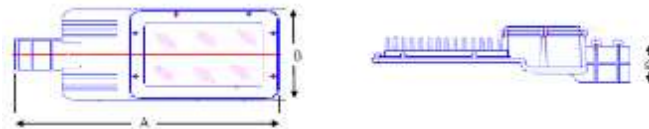

All dimensions in mm (Tolerance: ±5mm)

### **Electrical & Photometry Parameters:**

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	220W±5%	<1.013A	≥0.95	≥120lm/W	5700K	≥70	≤10%	≥85%

### **System Protections:**

Open & Short circuit protection, reverse polarity protection, high voltage cut off at 300V±10V, surge protection of 5KV internal.

### **Application:**

Street and road lighting, city squares, periphery lighting, complex boundry lighting, outdoor lighting, etc.

### **Mounting:**

Pole mounting, suitable up to 65mm pipe bracket.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt Ltd reserves the right to make changes in the design and data and withdraw the luminaries without any prior notice.	Prepared by :	MK./NK	Industrial Luminaire :
	Checked by :	AS	Cat. Ref. : HLSLD-15-220-CWL-R-HL2
	Approved by :	RL	Document No : HWR-R-2019

*As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.*