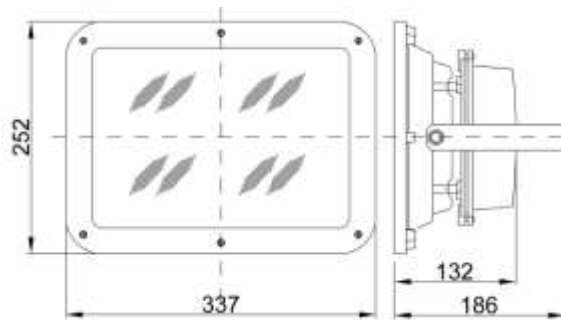


**LED 150W HW Flood Light****HLFLD-ML15-150-CWL-R-HL1**As per IS 10322 (Part-5/Sec-5) & IEC 60598-1**Product Description:** Energy efficient 150W LED Flood Light**Technical Specifications:**

Main Housing / Heat Sink Material:	Aluminum PDC
CG Box Material:	Aluminum PDC
Front Cover:	Clear toughened glass
Lens:	Suitable high efficient secondary lens
LED:	LM80 certified LED
Lumen Maintenance:	50000 hours @ L70
Control Gear:	Isolated, Electronic, CC Driver
Internal Wiring:	Insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP66
Impact Resistance:	IK07
Operating Voltage Range:	140V~270V
Operating Temperature:	-10°C~ 50°C

**GA Drawing:**All dimensions in mm (Tolerance:  $\pm 5$ mm)**Electrical & Photometry Parameters:**

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	150W $\pm 5\%$	<691mA	$\geq 0.95$	$\geq 110$ lm/W	5700K	$\geq 70$	$\leq 10\%$	$\geq 90\%$

**System Protections:**

Open & Short circuit protection, reverse polarity protection, high voltage cut off at 300V $\pm 10$ V, surge protection of 5KV internal + 10KV SPD.

**Application:**

Open area lighting, industrial periphery lighting, parking, etc.

**Mounting:**

Through bracket.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt. Ltd. reserves the right to make changes in the design and data and withdraw the luminaries without any prior notice.

Prepared by :	MK/NK	Industrial Luminaire :
Checked by :	AS	Cat. Ref. : HLFLD-ML15-150-CWL-R-HL1
Approved by :	RL	Document No : HW-2019

*As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.*