

210W LED HW STREET LIGHT

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

210W Energy Efficient LED Street Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 07/29/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 29-07-2019 -001		Date:	29-07-2019	
Product Description: 210W Energy Efficient LED Street Light				
Product Catalogue Reference:	HLSLD-06-210-CWL-R-F	L2	Brand:	HALONIX
Construction:				
Pressure die casted aluminum housing,	Glass front visor, SMD L	ED, Electronic driver	etc.	
Test Details:		Document	References	s/Standard:
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 		 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 		
Enclosures:				
Prepared By:		Approved By:		
Sanjay Sharma		Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Photometric Test Report: (As Per IES LM 79-08)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

Sample ID: 29-07-2019 -001					
Catalogue Reference:	HLSLD-06-21	HLSLD-06-210-CWL-R-HL2		29-07-2019	
Testing Agency:	HTPL Labora	HTPL Laboratory		HALONIX	
Equipment Used:		EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe Photometer (Type: PMS – 50/80) with Power Meter			
Ambient Temperature:	25±2°C	Relative Humidity:	65%		
Test Voltage:	240V	Frequency:	50Hz		
Stabilization Time:	30Min	Total Operating Time:	1.30Hours		
Rated Performance Parameters:					
Rated Wattage :	210W	Rated Input Current:	0.967A		
Nomical CCT :	5700K	Nominal CRI :	>70		
Measured Electrical Parameters:					
Supply Voltage:	240V	Input Current :	0.893A		
Frequency:	50Hz				
Total Power :	209.51W	Power Factor :	0.978		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

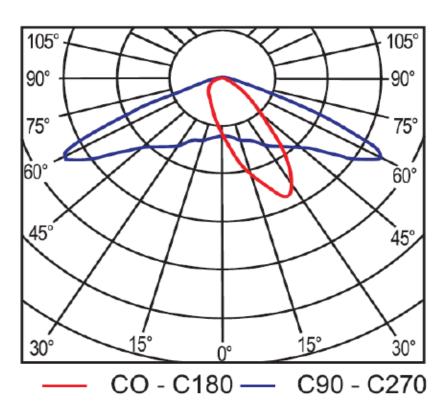

Catalogue Reference	HLSLD-06-210-CWL-R-HL2	Sample ID	29-07-2019 -001