

LED 10W Spike Light

HLOSPL-02-10-WW

As per IS 10322 & IEC 60598-1




Product Description: Energy efficient 10W LED Spike Light

Technical Specifications:

Main Housing:	Aluminum casting
Front Cover:	Optical grade PMMA
LED:	LM80 certified LED
Lumen Maintenance:	50000 hours @ L70
Control Gear:	Isolated, Electronic, CC Driver
Internal Wiring:	Multistrand Teflon insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP65
Operating Voltage Range:	140V~ 270V
Operating Temperature:	-10°C~ 50°C

GA Drawing:

OD – 4.8inch

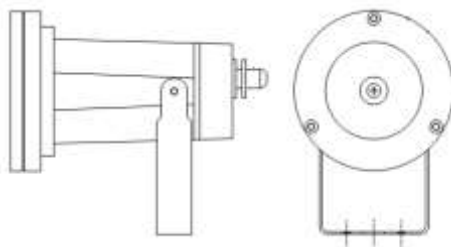

Electrical & Photometry Parameters:

Rated Voltage & Frequency	System Wattage	System Current	System Lumen Efficacy	CCT	CRI	Driver Efficiency
240V, 50Hz	10W±10%	<43mA	≥120lm	3000K	>70	>80%

System Protections:

Open & Short circuit protection, reverse polarity protection, surge protection of 4KV internal.

Application:

Lawns, Plazas, Path Ways, Gardens, Parks, etc.

Mounting:

Spike mounting.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt Ltd reserves the right to make changes in the design and data and withdraw the luminaries without any prior notice.

Prepared by :

MK/NK

Industrial Luminaire :

Checked by :

AS

Cat. Ref. : HLOSPL-02-10-WW

Approved by :

RL

Document No : UVE-2018

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.