

36W 2'X2' LED PANEL LIGHT CW

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

36W Energy Efficient LED Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 03/05/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 05-03-20	019 -001		Date:	05-03-2019
Product Description: 36W Energy Efficient 2'X2' LED Panel				
Product Catalogue Reference:	HLFPR22-11-36-CW		Brand:	HALONIX
Construction: CRCA housing, PMMA diffuser, etc.				
Test Details:		Document References/Standard:		
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 		 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 		
Enclosures:				
Prepared By:		Ар	proved B	y:
Sanjay Sharma		Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

Photometric Test Report: (As P	er IES LM 79-08)					
Sample ID: 05-03-2019 -001						
Catalogue Reference:	HLFPR22-11-	HLFPR22-11-36-CW		05-03-2019		
Testing Agency:	HTPL Laborat	HTPL Laboratory		HALONIX		
Equipment Used:		EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe Photometer (Type: PMS – 50/80) with Power Meter				
Ambient Temperature:	25±2°C	Relative Humidity:	65%			
Test Voltage:	240V	Frequency:	50Hz			
Stabilization Time:	30Min	Total Operating Time:	1.30Hours			
Rated Performance Parameters: Rated Wattage :	36W	Rated Input Current:	0.174A			
Nomical CCT :	6500K	Nominal CRI:	>80			
Measured Electrical Parameters	:					
Supply Voltage : Frequency :	240V 50Hz	Input Current :	0.151A			
Total Power :	35.56W	Power Factor :	0.981			
Photometric Measurement Data	:					
Total Measured Lumen :	3626.41lm	Luminaries Efficacy:	101.98lm/W			
CCT:	6454K	CRI:	81.9			
Light Intensity Distribution:		Attached (Refer to Page	No. 4)			
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma				

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

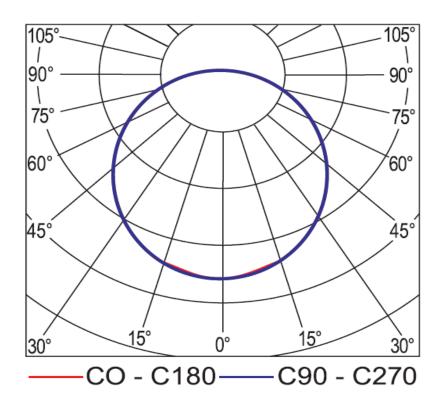

Catalogue Reference	HLFPR22-11-36-CW	Sample ID	05-03-2019 -001