

90W LED HW STREET LIGHT

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

90W Energy Efficient LED Street Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 11/07/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 07-11-2019 -002		Date:	07-11-2019	
Product Description: 90W Energy Efficient LED Street Light				
Product Catalogue Reference:		Brand:	HALONIX	
Construction:		•		
Pressure die casted aluminum housing, SMD LED, Ele	ctronic driver etc.			
Test Details:	Docum	Document References/Standard:		
Light intensity distribution Measurement	• IES-LM-79-0	08 "Electrical a	nd Photometric	
Total Lumen output Measurement	Measureme	Measurements of Solid-State Lighting		
 Electrical Parameters Measurement 	Products"	Products"		
	• IS: 16106-2	2012 "Method	of Electrical and	
		Photometric solid state lighting (LED)		
	Products"			
• IS: 16105-2012 "Meth				
		of Lumen maintenance of solid state light		
	sources"			
Enclosures:				
Prepared By:		Approved By:		
Sanjay Sharma		Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

• `	er IES LM 79-08)				
Sample ID: 07-11-2019 -002					
Catalogue Reference:			Testing Date:	07-11-2019	
Testing Agency:	HTPL Laborat	tory	Brand:	HALONIX	
Equipment Used:	EVERFINE Brand Gonio Photometer (Type: GO - 2000B			ind Globe	
	Photometer (Type: PMS – 50/80) with Power Meter				
Ambient Temperature:	25±2°C	Relative Humidity:	65%		
Test Voltage:	240V	Frequency:	50Hz		
Stabilization Time:	30Min	Total Operating Time:	1.30Hours		
Rated Performance Parameters:					
Rated Wattage :	90W	Rated Input Current:	0.434A		
Nomical CCT :	5700K	Nominal CRI:	>70		
	-	•	-		
Measured Electrical Parameters:					
Supply Voltage:	240V	Input Current :	0.374A		
Frequency:	50Hz				
Total Power :	88.11W	Power Factor :	0.982		
Photometric Measurement Data:					
Total Measured Lumen :	9161.68lm	Luminaries Efficacy:	103.98lm/W		
CCT:	5887K	CRI:	73.1		
Light Intensity Distribution:		Attached (Refer to Page No. 4)			
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma			

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

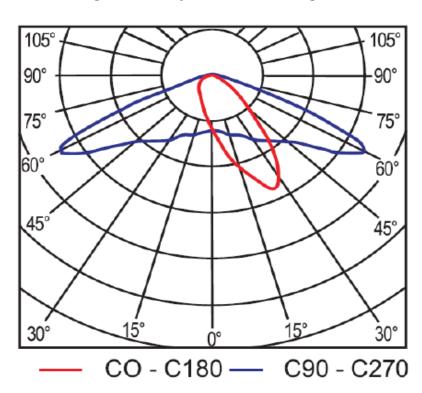

Catalogue Reference	Sample ID	07-11-2019 -002