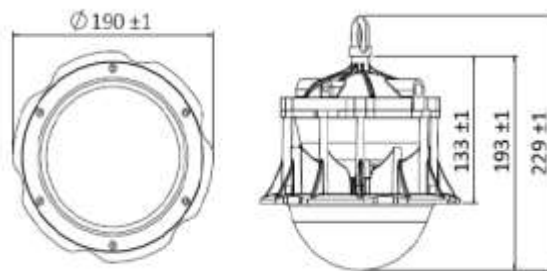


**LED 40W Well Glass****HLWG-10-40-WW**

As per IS 10322(Part-5/Sec-1) &amp; IEC 60598-1

**Product Description:** Energy efficient 40W LED Well Glass**Technical Specifications:**

Main Housing:	Powder coated Aluminum PDC
Cover:	Diffused opal polycarbonate
LED:	LM80 certified LED.
Lumen Maintenance:	50000 hours @ L70.
Control Gear:	Isolated, Electronic, CC Driver.
Internal Wiring:	insulated Cu wire
Hardware:	SS & MS Zinc plated and passivate.
Ingress Protection:	IP66
Impact resistance:	IK05
Operating Voltage Range:	110V~300V
Operating Temperature:	-10°C~60°C

**GA Drawing:**All dimensions in mm (Tolerance:  $\pm 10$ mm)**Electrical & Photometry Parameters:**

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	Lumen Efficacy	CCT (as per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	40W $\pm 10\%$	<193mA	>0.95	$\geq 100$ lm/W	3000K	>70	<10%	>85%

**System Protections:**Open & Short circuit protection, reverse polarity protection, high voltage cut off at 300V $\pm 10$ V, surge protection of 5KV internal.**Application:**

Industries, steel plants, thermal plants, cement plants, material handling plants, etc.

**Mounting:**

Through eye bolt .

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt. Ltd. reserves the right to make changes in the design and data and withdraw the luminaires without any prior notice.

Prepared by :

MK/NK

Industrial Luminaire :

Checked by :

AS

Cat. Ref. : HLWG-10-40-WW

Approved by :

RL

Document No : KON-2019

As improvement in design &amp; method of manufacturing is a continuous process, the product supplied may differ in details from above given data.