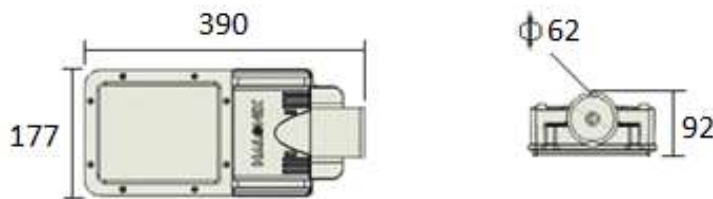


LED 60W HW Street Light**HLSLD-10-60-CWL-I**

As per IS 10322 (Part-5/Sec-3) & IEC 60598-1

**Product Description:** Energy efficient 60W LED Street Light**Technical Specifications:**

Housing Material:	Aluminum PDC, Top maintainable
Front Cover:	Clear toughened glass
Lens:	Suitable high efficient secondary lens
LED:	LM80 certified LED
LED Lumen Maintenance:	50,000 hours @ L70
Control Gear:	Isolated, Electronic, CC driver
Internal Wiring:	Insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP66
Impact Resistance:	IK05
Operating Voltage:	140V~270V
Operating Temperature:	-10°C~ 50°C

GA Drawing:All dimensions in mm (Tolerance: ± 5 mm)**Electrical & Photometry Parameters:**

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	60W $\pm 10\%$	<289mA	≥ 0.95	$\geq 100\text{lm/W}$	5700K	≥ 75	$\leq 10\%$	$\geq 85\%$

System Protections:Open & Short circuit protection, reverse polarity protection, high voltage cut off at 300V ± 10 V, surge protection of 5KV internal.**Application:**

Street and road lighting, city squares, periphery lighting, complex boundary lighting, outdoor lighting, etc.

Mounting:

Pole mounting, suitable up to 60mm pipe bracket.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt. Ltd. reserves the right to make changes in the design and data and withdraw the luminaires without any prior notice.	Prepared by :	Sanjay Sharma	Industrial Luminaire :
	Checked by :		Cat. Ref. :
	Approved by :	Rajeev Chhabra	Document No : KON-2018

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.