

80W LED HW BAY LIGHT

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

80W Energy Efficient LED Bay Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 02/11/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 11-02-20)19 -001			Date:	11-02-2019
Product Description: 80W Energy Efficient LED Bay Light					
Product Catalogue Reference:	HLBL-ML11-80	0-CWL-HL1		Brand:	HALONIX
Construction:					
Pressure die casted aluminum housir	ng, Glass front visc	or, SMD LED,	Electronic driver	etc.	
	-	·			
Test Detail	s:		Document References/Standard:		
Light intensity distribution Measurement		•	IES-LM-79-08 "Electrical and Photometric		
Total Lumen output Measurement			Measurements of Solid-State Lighting		
Electrical Parameters Measurement			Products"		
		•	IS: 16106-2012 Photometric sol Products"		
				"Method	of measurement
			of Lumen maint sources"		
Enclosures:					
Prepared By:			Approved By:		
Sanjay Sharma			Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

Photometric Test Report: (As Pe	er IES LM 79-08)					
Sample ID: 11-02-2019 -001						
Catalogue Reference:	HLBL-ML11-8	HLBL-ML11-80-CWL-HL1		11-02-2019		
Testing Agency:	HTPL Laborat	HTPL Laboratory		HALONIX		
Equipment Used:	EVERFINE Bra	EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and GI				
	Photometer (Type: PMS – 50/80) with Power Meter					
Ambient Temperature:	25±2°C	Relative Humidity:	65%			
Test Voltage:	240V	Frequency:	50Hz			
Stabilization Time:	30Min	Total Operating Time:	1.30Hours			
Rated Performance Parameters:						
Rated Wattage :	80W	Rated Input Current:	0.386A			
Nomical CCT :	5700K	Nominal CRI:	>70			
	•	•	-			
Measured Electrical Parameters:						
Supply Voltage:	240V	Input Current: 0.339A				
Frequency:	50Hz					
Total Power :	79.95W	Power Factor :	0.983			
Photometric Measurement Data:						
Total Measured Lumen:	9125.49lm	Luminaries Efficacy:	114.14lm/W			
CCT:	5829K	CRI:	72.3			
Light Intensity Distribution:		Attached (Refer to Page	No. 4)			
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma				

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

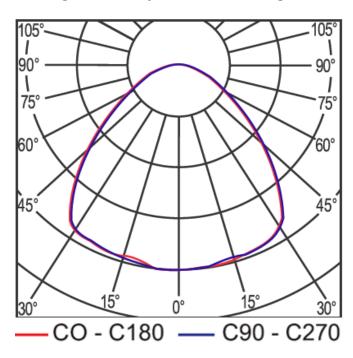

Catalogue Reference	HLBL-ML11-80-CWL-HL1	Sample ID	11-02-2019 -001