



180W LED HW FLOOD LIGHT

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

180W Energy Efficient LED Flood Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634)
05/29/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED
HTPL LABORATORY (NABL Certificate No: TC-7634)
Plot-5, Sector-12, IIE, SIDCUL
Haridwar (Uttarakhand), PIN-249403, India
Contact:
Email: customercare@halonix.co.in
Fax:
Web: <http://www.halonix.co.in>

Test Report

| | | | |
|---|------------------------------|--|------------|
| Report Number: | 29-05-2019 -002 | Date: | 29-05-2019 |
| Product Description: 180W Energy Efficient LED Flood Light | | | |
| Product Catalogue Reference: | HLFLD-ML15-180-CWL-R-HL1-90D | Brand: | HALONIX |
| Construction: Pressure die casted aluminum housing, Glass front visor, SMD LED, Electronic driver etc. | | | |
| Test Details: | | Document References/Standard: | |
| <ul style="list-style-type: none">Light intensity distribution MeasurementTotal Lumen output MeasurementElectrical Parameters Measurement | | <ul style="list-style-type: none">IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products"IS : 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products"IS : 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" | |
| Enclosures: | | | |
| Prepared By: | | Approved By: | |
| Sanjay Sharma | | Rajeev Chhabra | |

HALONIX TECHNOLOGIES PRIVATE LIMITED
HTPL LABORATORY (NABL Certificate No: TC-7634)
Plot-5, Sector-12, IIE, SIDCUL
Haridwar (Uttarakhand), PIN-249403, India
Contact:
Email: customercare@halonix.co.in
Fax:
Web: <http://www.halonix.co.in>

Electrical & Photometric Test Report

| | | | |
|--|---|---------------|------------|
| Photometric Test Report: (As Per IES LM 79-08) | | | |
| Sample ID: 29-05-2019 -002 | | | |
| Catalogue Reference: | HLFLD-ML15-180-CWL-R-HL1-90D | Testing Date: | 29-05-2019 |
| Testing Agency: | HTPL Laboratory | Brand: | HALONIX |
| Equipment Used: | EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe Photometer (Type: PMS – 50/80) with Power Meter | | |

| | | | |
|----------------------|--------|-----------------------|-----------|
| Ambient Temperature: | 25±2°C | Relative Humidity: | 65% |
| Test Voltage: | 240V | Frequency: | 50Hz |
| Stabilization Time: | 30Min | Total Operating Time: | 1.30Hours |


| | | | |
|-------------------------------|-------|-----------------------|--------|
| Rated Performance Parameters: | | | |
| Rated Wattage : | 180W | Rated Input Current : | 0.829A |
| Nomical CCT : | 5700K | Nominal CRI : | >70 |

| | | | |
|---------------------------------|---------|-----------------|--------|
| Measured Electrical Parameters: | | | |
| Supply Voltage : | 240V | Input Current : | 0.769A |
| Frequency : | 50Hz | | |
| Total Power : | 179.85W | Power Factor : | 0.974 |

| | | | |
|-------------------------------|--------------------------------|-----------------------|------------|
| Photometric Measurement Data: | | | |
| Total Measured Lumen : | 20420.17lm | Luminaries Efficacy : | 113.54lm/W |
| CCT : | 5785K | CRI : | 71.5 |
| Light Intensity Distribution: | Attached (Refer to Page No. 4) | | |
| Approved By: Rajeev Chhabra | Tested By: Sanjay Sharma | | |

HALONIX TECHNOLOGIES PRIVATE LIMITED
HTPL LABORATORY (NABL Certificate No: TC-7634)
Plot-5, Sector-12, IIE, SIDCUL
Haridwar (Uttarakhand), PIN-249403, India
Contact:
Email: customercare@halonix.co.in
Fax:
Web: <http://www.halonix.co.in>

Light intensity Distribution Diagram

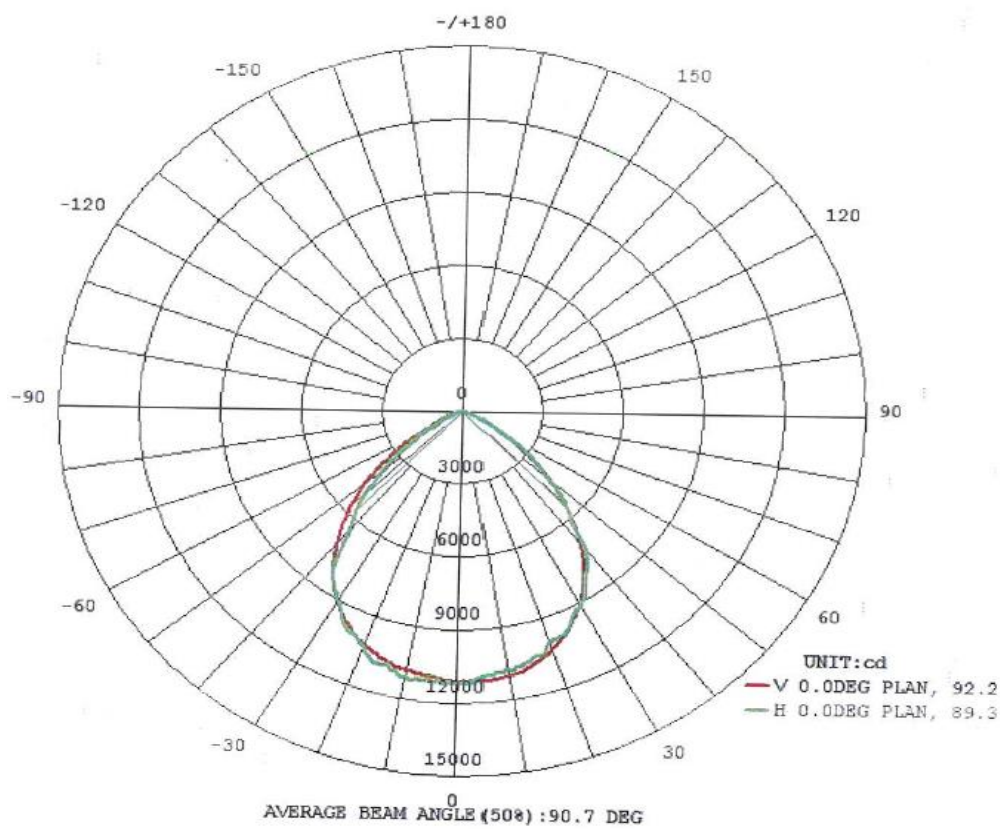

| | | | |
|---------------------|------------------------------|-----------|-----------------|
| Catalogue Reference | HLFLD-ML15-180-CWL-R-HL1-90D | Sample ID | 29-05-2019 -002 |
|---------------------|------------------------------|-----------|-----------------|