

50W LED HW STREET LIGHT

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

50W Energy Efficient LED Street Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 03/11/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 11-03-2019 -001	Date:	11-03-2019
Product Description: 50W Energy Efficient LED Street Light		
Product Catalogue Reference: HLOSL-01-50-CWL	Brand:	HALONIX
Construction: Spun aluminum housing, Clear acrylic front visor, SMD LED, Ele	ctronic driver etc.	
Test Details:	Document Reference	es/Standard:
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 	 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 	
Enclosures:		
Prepared By:	Approved By:	
Sanjay Sharma	Rajeev Chhabra	

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

	.== ==				
Photometric Test Report: (As Per IES LM 79-08)					
Sample ID: 11-03-2019 -001					
Catalogue Reference:	HLOSL-01-5	HLOSL-01-50-CWL		11-03-2019	
Testing Agency:	HTPL Labor	atory	Brand:	HALONIX	
Equipment Used: EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe					
	Photomete	Photometer (Type: PMS – 50/80) with Power Meter			
Ambient Temperature:	25±2°C	Relative Humidity:	65%		
T M. II	2.40)./	F	FOLL		

Ambient Temperature:	25±2°C	Relative Humidity:	65%
Test Voltage:	240V	Frequency:	50Hz
Stabilization Time:	30Min	Total Operating Time:	1.30Hours

Rated Performance Parameters:				
Rated Wattage :	50W	Rated Input Current:	0.241A	
Nomical CCT :	5700K	Nominal CRI:	>70	

Measured Electrical Parameters:				
Supply Voltage:	240V	Input Current :	0.212A	
Frequency:	50Hz			
Total Power :	49.97W	Power Factor :	0.982	

Photometric Measurement Data:			
Total Measured Lumen :	5045.97lm	Luminaries Efficacy:	100.98lm/W
CCT:	5848K	CRI:	72.2
Light Intensity Distribution:		Attached (Refer to Page No. 4)	
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma	

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

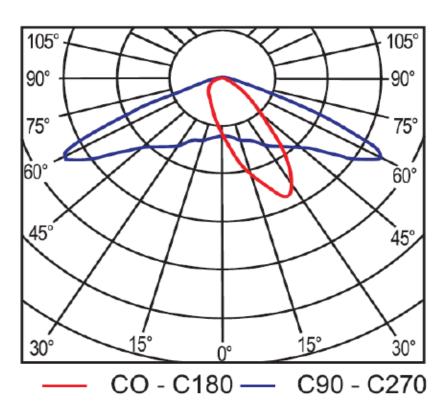

Catalogue Reference	HLOSL-01-50-CWL	Sample ID	11-03-2019 -001