

6W LED MOD DOWN LIGHT CW

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

6W Energy Efficient LED Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 03/06/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 06-03-2019 -001	Da	te: 06-03-2019	
Product Description: 6W Energy Efficient LED MOD Down Light			
Product Catalogue Reference: HLDLS-S06-06-CW	Bra	nd: HALONIX	
Construction: Aluminum die cast housing, PMMA diffuser, etc.			
Test Details:	Document Refer	ences/Standard:	
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 	 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 		
Enclosures:			
Prepared By:	Approv	ved By:	
Sanjay Sharma	Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

<u> </u>				
Photometric Test Report: (As I	Per IES LM 79-08)			
Sample ID: 06-03-2019 -001				
Catalogue Reference:	HLDLS-S06-	HLDLS-S06-06-CW		06-03-2019
Testing Agency:	HTPL Labor	HTPL Laboratory		HALONIX
Equipment Used:	EVERFINE B	EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe		
	Photomete	Photometer (Type: PMS – 50/80) with Power Meter		
Ambient Temperature:	25±2°C	Relative Humidity:	65%	
Test Voltage:	2401/	Erequency:	50Hz	

Ambient Temperature:	25±2°C	Relative Humidity:	65%
Test Voltage:	240V	Frequency:	50Hz
Stabilization Time:	30Min	Total Operating Time:	1.30Hours

Rated Performance Parameters:			
Rated Wattage :	6W	Rated Input Current:	0.029A
Nomical CCT :	6500K	Nominal CRI:	>80

Measured Electrical Parameters:			
Supply Voltage:	240V	Input Current :	0.025A
Frequency:	50Hz		
Total Power :	5.81W	Power Factor :	0.968

Photometric Measurement Data:			
Total Measured Lumen :	481.71lm	Luminaries Efficacy:	82.91lm/W
CCT:	6391K	CRI:	81.4
Light Intensity Distribution:		Attached (Refer to Page No. 4)	
Approved By: Rajeev Chhabra Tes		Tested By: Sanjay Sharma	

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

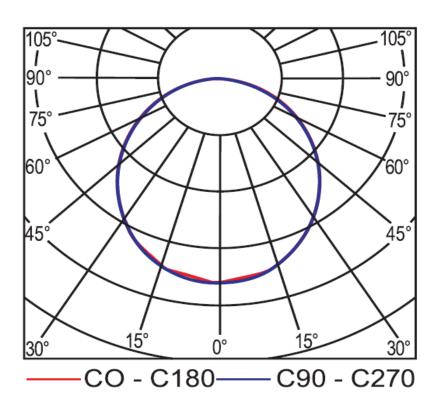

To the second se			
Catalogue Reference	HLDLS-S06-06-CW	Sample ID	06-03-2019 -001